




RECESSED ACCESS DOOR WITH DRYWALL FLANGE

BA-AHA-GYP


INSTALLATION

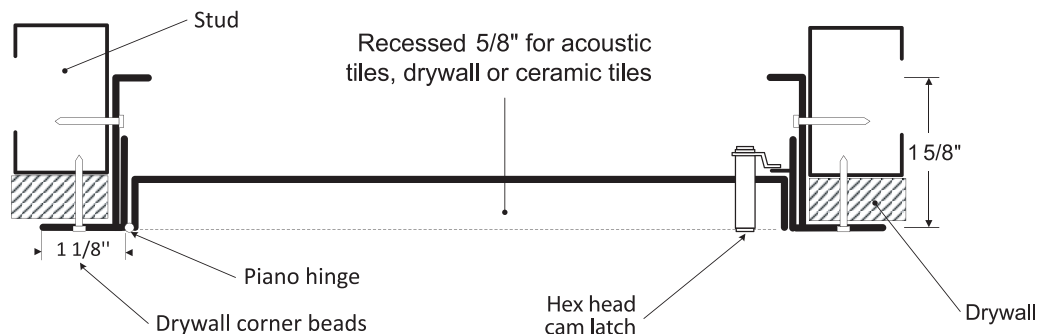

DIMENSIONS AND APPEARANCE

LEED ready: This product contributes to LEED® credits.

DOOR SIZE - W x H INCHES (MM)	NUMBER OF LOCKS	WEIGHT LBS	KG
8 x 8 (203 x 203)	1	3	1.4
12 x 12 (304 x 304)	1	5	2.3
16 x 16 (406 x 406)	1	9	4.1
18 x 18 (457 x 457)	1	11	5
24 x 24 (609 x 609)	1	16	7.3
Rough wall opening is door size + 1/4" or + 6mm			
Your odd sizes: Made in 5 days			

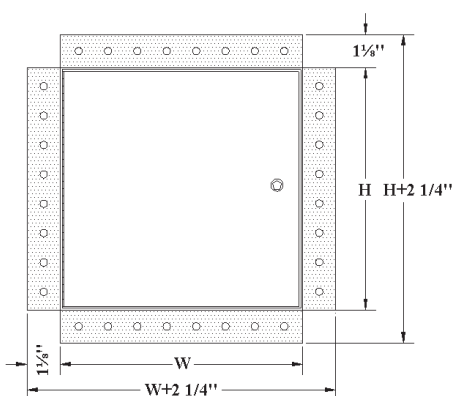

DESCRIPTION AND MATERIAL SPECIFICATION

Material: 16 gauge cold rolled steel
Hinge: continuous piano hinge
Lock / latch: Allen hex head cam latch
Finish: high quality white powder coat primer
Packaging: individually wrapped, 1 per box
Recess: 5/8" standard
GYP: drywall corner beads flange

POPULAR OPTIONS

For complete list of options
go to: www.BestAccessDoors.ca

Latch: key operated cylinder cam latch
Material: stainless steel 304 #4 (brushed finish)
Recess: 1/2" to 3/4" (standard 2" frame)
13/16" to 1 1/2" (special 3" frame)



PROJECT DATA

PROJECT NAME:	QTY	W	H	OPTIONS
ARCHITECT:				
DEALER:				
CONTRACTOR:				
LOCATION:	SPECIAL INSTRUCTIONS:			
DATE:				
TAGGING INSTRUCTIONS:	SUBMITTAL APPROVAL: (signature or stamp)			

ADDRESS: Box 30021 - RPO Upper James St, Hamilton, Ontario, L9B 0E4

Tel.: 1-800-483-0823

Fax: 1-888-828-6021

www.BestAccessDoors.ca
sales@bestaccessdoors.ca