


ACCESS DOOR WITH HIDDEN FLANGE FOR ALL SURFACE TYPES

BA-CTR

INSTALLATION

► **EXCLUSIVE** ◀
ACCESS DOOR

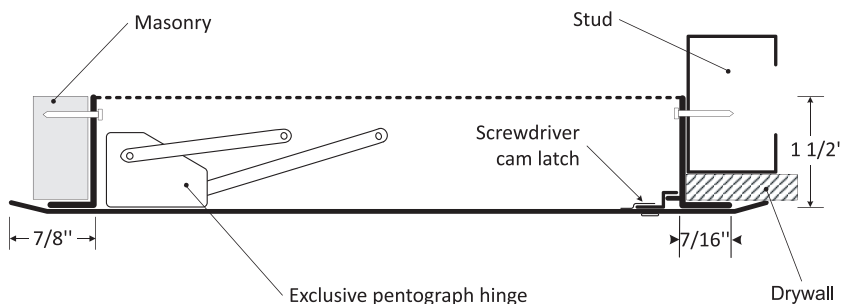


**A LABOR SAVING
alternative to doors
with DRYWALL FLANGES**

“No need to mud or plaster”

DIMENSIONS AND APPEARANCE

LEED ready: This product contributes to LEED® credits.

DOOR SIZE W x H inches (MM)	NUMBER OF LOCKS	WEIGHT LBS	KG
8 1/4 x 8 1/4 (210 x 210)	1	3	1.4
8 1/4 x 12 (210 x 304)	1	4	1.8
10 x 10 (254 x 254)	1	4	1.8
12 x 12 (304 x 304)	1	6	2.7
14 x 14 (355 x 355)	1	7	3.2
12 x 18 (304 x 457)	1	8	3.6
16 x 16 (406 x 406)	1	9	4.1
18 x 18 (457 x 457)	3	10	4.5
18 x 24 (457 x 609)	4	13	5.9
20 x 20 (508 x 508)	3	13	5.9
22 x 22 (558 x 558)	3	15	6.8
22 x 30 (558 x 762)	5	17	7.7
22 x 36 (558 x 914)	5	19	8.6
24 x 24 (609 x 609)	4	17	7.7
24 x 30 (609 x 762)	5	19	8.6
24 x 36 (609 x 914)	5	24	10.9

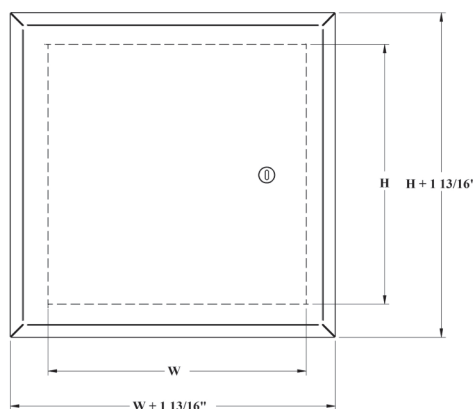

Rough wall opening is door size + 1/4" or + 6mm



DESCRIPTION AND MATERIAL SPECIFICATION

Material: 16 gauge cold rolled steel
Hinge: concealed, exclusive hinge design
Lock / latch: screwdriver operated cam latch
Finish: high quality white powder coat primer
Packaging: individually wrapped, 1 per box

POPULAR OPTIONS

Lock / latch:

**For complete list of options
go to: www.BestAccessDoors.ca**
 key operated cylinder cam latch,
 hex head cam latch, pinned hex
 head cam latch, handle operated cam latch,
 mortise preparation for cylinder.

Material: stainless steel 304 #4 (brushed finish)

Gasketing: neoprene gasket



PROJECT DATA

PROJECT NAME:	QTY	W	H	OPTIONS
ARCHITECT:				
DEALER:				
CONTRACTOR:				
LOCATION:	SPECIAL INSTRUCTIONS:			
DATE:				
TAGGING INSTRUCTIONS:	SUBMITTAL APPROVAL: (signature or stamp)			

ADDRESS: Box 30021 - RPO Upper James St, Hamilton, Ontario, L9B 0E4

Tel.: 1-800-483-0823

Fax: 1-888-828-6021

www.BestAccessDoors.ca
sales@bestaccessdoors.ca