


Best Access Doors SUBMITTAL / TECHNICAL DATA SHEET

DRAFT STOP ACCESS DOOR

FOR ATTIC APPLICATION

BA-DRD

INSTALLATION: WALLS ONLY

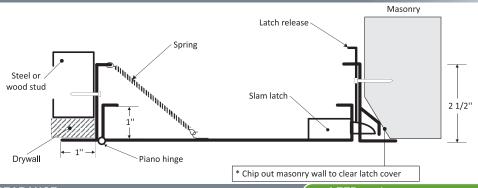


DIMENSIONS AND APPEARANCE

NUMBER WEIGHT DOOR SIZE - W x H INCHES (MM) OF LOCKS LBS KG 22 x 30 (558 x 762) 22 10 22 x 36 (558 x 914) 2 24 10.9 24 x 36 (609 x 914) 2 29 12.2 24 x 48 (609 x 914) 2 37 16.8 24 x 60 (609 x 1524) 2 20 30 x 30 (762 x 762) 30 13.6 36 x 36 (914 x 914) 2 39 17.7 2 36 x 48 (914 x 1219) 22.2 Rough wall opening is door size + 1/4" or + 6mm

> Your odd sizes: Made in 5 days

LEED ready: This product contributes to LEED® credits.





DESCRIPTION AND MATERIAL SPECIFICATION

Material: 16 gauge cold rolled steel Hinge: continuous piano hinge

Lock / latch: self latching tool-key operated latch

and/or ring operated latch, both included

Inside panel release: standard on all doors Automatic panel closer: standard on all doors Finish: high quality white powder coat primer individually wrapped, 1 per box Packaging:

POPULAR For complete list of options **OPTIONS** go to: www.BestAccessDoors.ca

Material: stainless steel 304 #4 (brushed finish)

key operated cylinder cam latch, handle Lock / latch: operated slam latch, mortise preparation for

cylinder (cylinder optional), mortise deadbolt lock

Gasketing: neoprene gasket

Click here to view the Products





PROJECT	DATA

PROJECT NAME:	QTY	W	Н	OPTIONS		
ARCHITECT:						
DEALER:						
CONTRACTOR:						
LOCATION:	SPECIAL IN	SPECIAL INSTRUCTIONS:				
DATE:						
TAGGING INSTRUCTIONS:		SUBMITTAL APPROVAL: (signature or stamp)				

ADDRESS: Box 30021 - RPO Upper James St, Hamilton, Ontario, L9B 0E4

Tel.: 1-800-483-0823 Fax: 1-888-828-6021 www.bestaccessdoors.ca sales@bestaccessdoors.ca