




FLUSH ACCESS DOOR WITH CONCEALED PUSH-LATCH AND DRYWALL FLANGE - FOR ALL DRYWALL SURFACES

BA-EDG

EDG-GYP

INSTALLATION

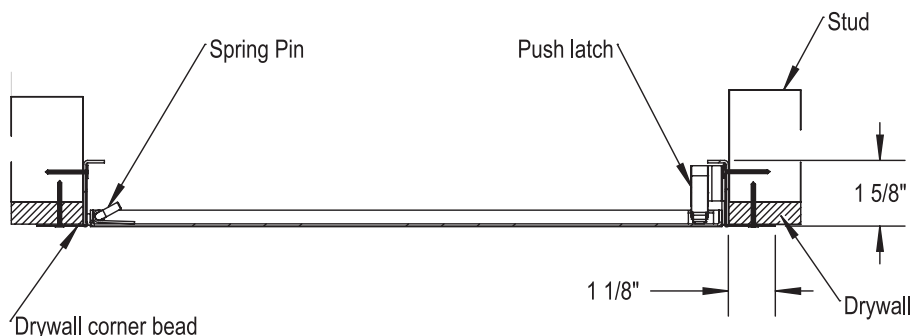


DIMENSION AND APPEARANCE

LEED ready: This product contributes to LEED® credits.

DOOR SIZE - W x H INCHES (MM)	WEIGHT	
	LBS	KG
6" X 6" (152 x 152)	2.2	1
8" X 8" (203 x 203)	3.1	1.4
8" X 12" (203 x 304)	4.2	1.9
10" X 10" (254 x 254)	4.2	1.9
* 12" X 12" (304 x 304)	5.45	2.5
12" X 16" (304 x 406)	6.55	3
12" X 18" (304 x 457)	7.5	3.2
12" X 24" (304 x 609)	9.9	4.5
14" X 14" (355 x 355)	6.55	3
16" X 16" (406 x 406)	8.1	3.7
18" X 18" (457 x 457)	9.9	4.5
18" X 24" (457 x 609)	12.6	5.7
20" X 20" (508 x 508)	12.1	5.5
22" X 22" (558 x 558)	13.4	6.1
22" X 30" (558 x 762)	18.6	8.4
22" X 36" (558 x 914)	21.8	9.9
24" X 24" (609 x 609)	16.05	7.3

* Doors > 12" X 12" have 2 push latches.

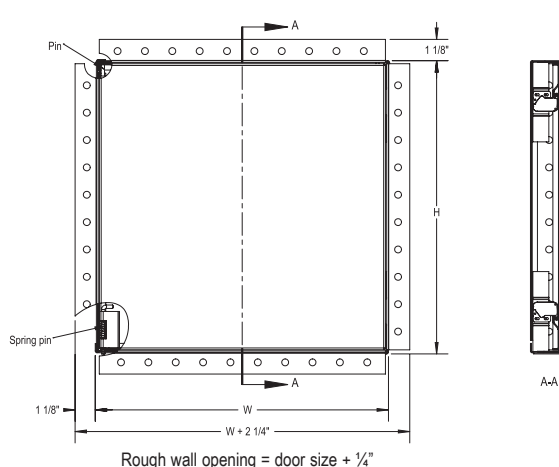

DESCRIPTION AND MATERIAL SPECIFICATION

CENDREX PARTNERS

Material: 16 gauge cold rolled steel. Frame with corner bead flange.

Hinge: Concealed spring hinge.

Finish: High quality white powder coat finish.

Removable door: Safety cables - For doors > 12" X 12"

Packaging: Individually wrapped. 1 per box.

POPULAR OPTIONS For complete list of options go to: www.bestaccessdoors.ca

Material: Stainless steel, galvalume steel



PROJECT DATA

PROJECT NAME:	QTY	W	H	OPTIONS
ARCHITECT:				
DEALER:				
CONTRACTOR:				
LOCATION:	SPECIAL INSTRUCTIONS:			
DATE:				
TAGGING INSTRUCTIONS:	SUBMITTAL APPROVAL: (signature or stamp)			

Contact: info@bestaccessdoors.com

For more information, visit www.bestaccessdoors.ca

Tel.: 1-800-483-0823

Fax: 1-888-828-6021

Address:
Box 30021 - RPO Upper James
St, Hamilton, Ontario, L9B 0E4