
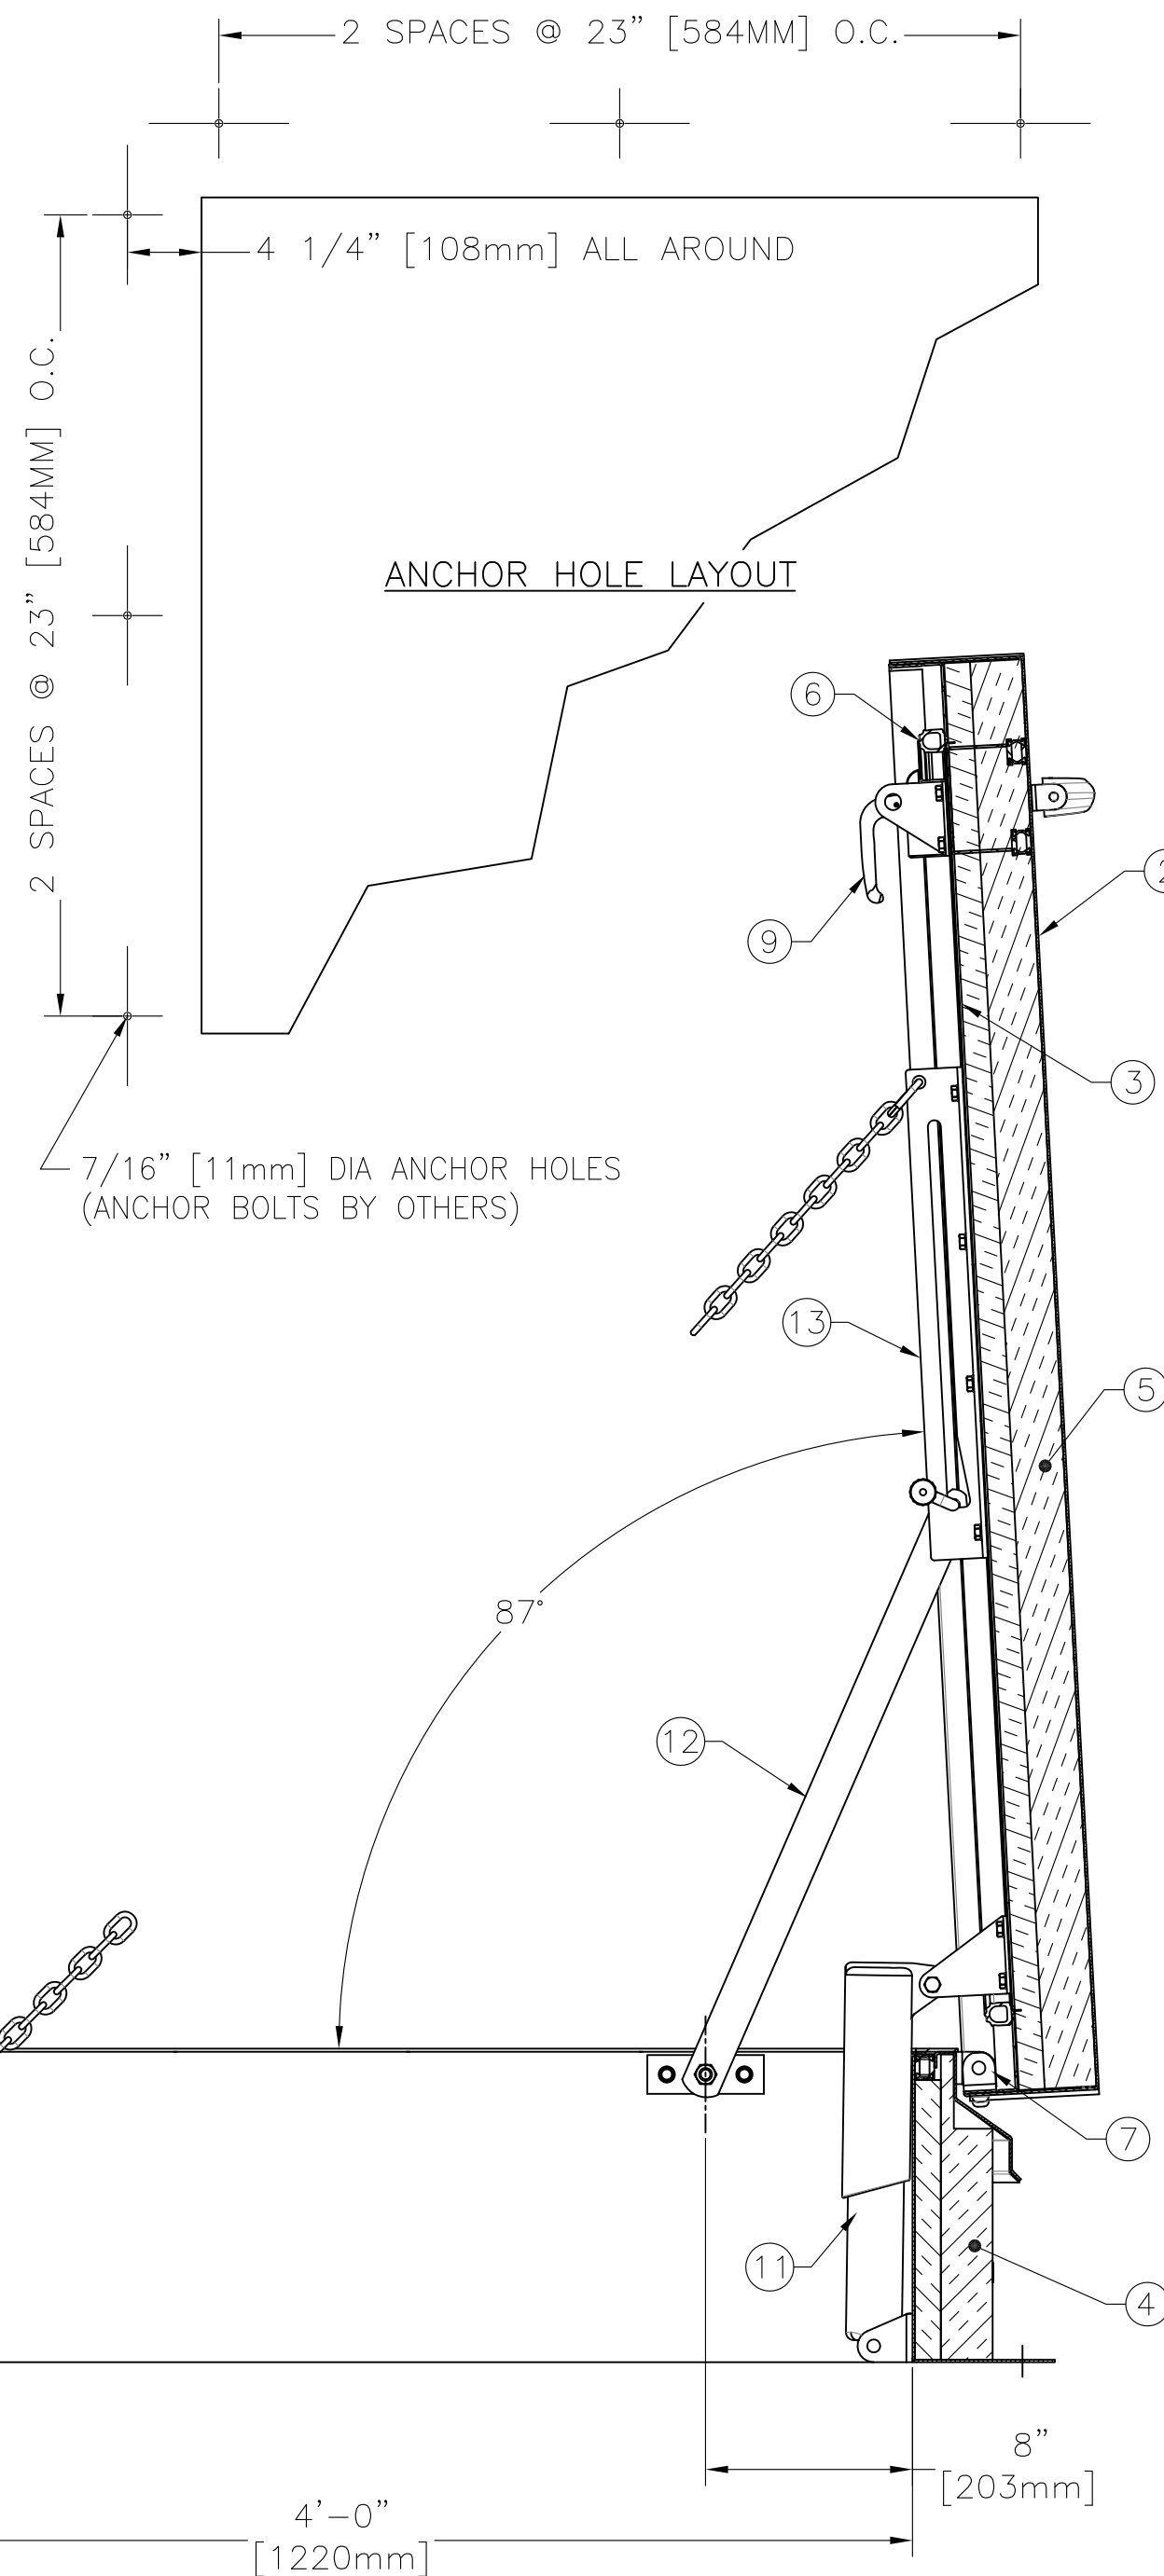


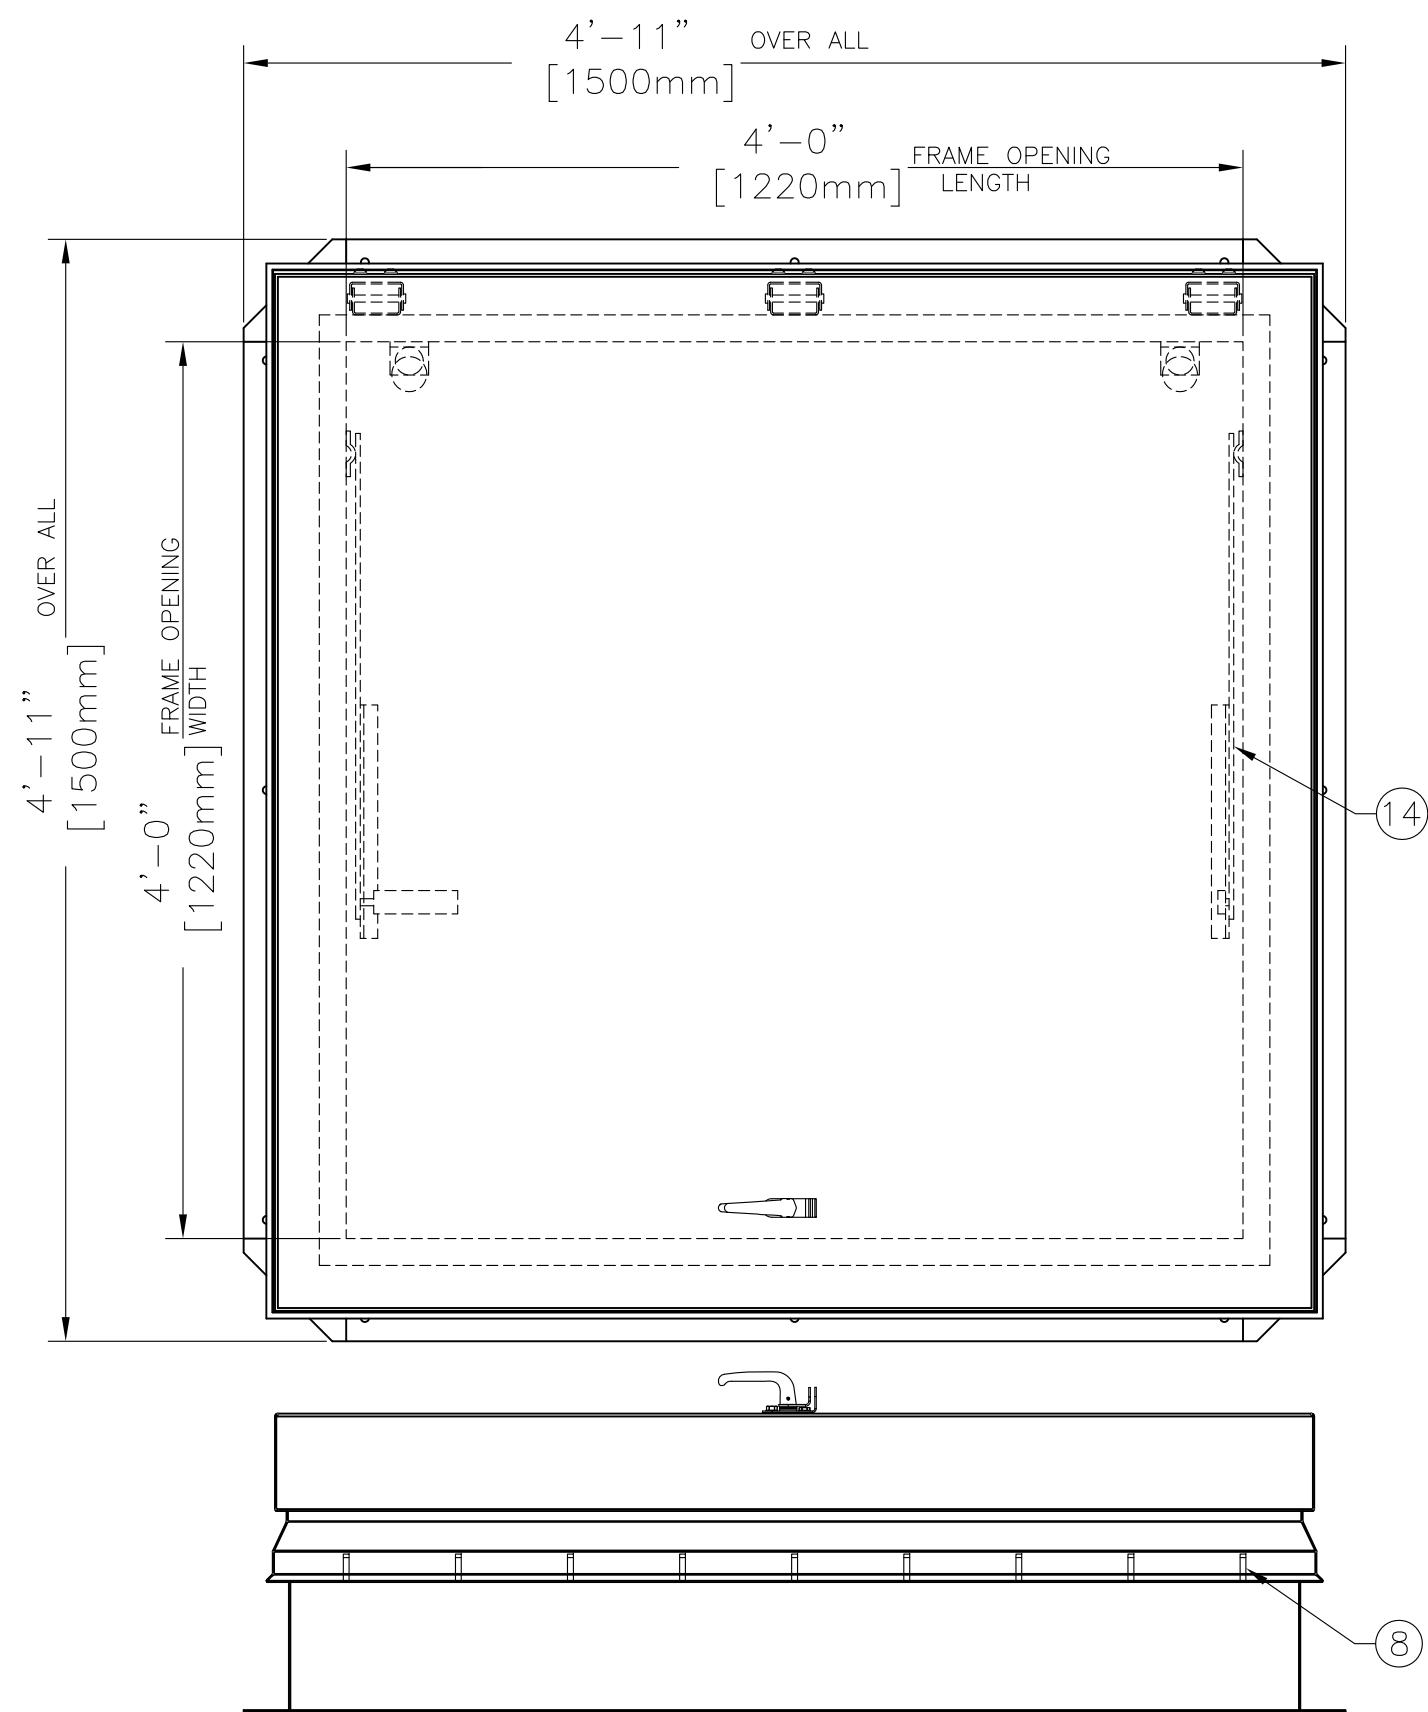

SECTION

SPECIFICATIONS

1. THERMALLY BROKEN CURB W/INTEGRAL CAPFLASHING
11 GA. ALUMINUM (CORNERS FULLY WELDED)
2. THERMALLY BROKEN COVER – 11 GA. ALUMINIUM
3. COVER LINER – 18 GA. ALUMINIUM
4. 3" [75mm] POLYISOCYANURATE CURB INSULATION
5. 3" [75mm] POLYISOCYANURATE COVER INSULATION
6. EPDM GASKET (ALL AROUND COVER)
7. PINTLE HINGE – STAINLESS STEEL TYPE 316
8. Bilclip® FLASHING SYSTEM
9. SLAM LATCH WITH INSIDE AND OUTSIDE HANDLES W/ PADLOCK HASPS
10. LOCK STRIKE AND PADLOCK HASP
11. LIFTING MECHANISM WITH REINFORCED COMPOSITE TUBES AND COMPRESSION SPRINGS
12. HEAVY DUTY HOLD OPEN ARM W/ RED VINYL GRIP AND COVER RELEASE
13. ARM GUIDE BRACKET
14. GUIDE ARM
15. COVER HOLD CHAIN, (1) @ EACH END

SHOP FINISH

ALUMINIUM: MILL FINISH
HARDWARE: CORROSION RESISTANT
(UNLESS OTHERWISE SPECIFIED)

NOTES:

1. THIS PRODUCT MAY BE INSTALLED ON EITHER A FLAT OR SLOPING ROOF. WHEN INSTALLED ON A SLOPE, THE HINGE SIDE MUST RUN PARALLEL WITH THE SLOPE. IF SLOPE EXCEEDS 30°, ADVISE FACTORY FOR MODIFICATION.
2. FULL SPECIFICATIONS ARE AVAILABLE ON WEBSITE:
www.bilco.com

CUSTOMER

P.O. NO.

JOB

SALES REP.



www.BestAccessDoors.ca
Fax: 1-888-828-6021
Phone: 1-800-483-0823
Email: info@BestAccessDoors.ca

SINGLE LEAF ROOF ACCESS HATCH TYPE F-50TB

QTY	TYPE	SIZE	
		WIDTH	LENGTH
☐	F-50TB	4'-0"	4'-0"
		1220mm	1220mm
			HINGE SIDE