


NOTES:
TYPE FR DOORS ARE DESIGNED WITH A 1" [25mm] PAN COVER TO ACCEPT A VARIETY OF FLOORING MATERIALS. SIZES ARE LIMITED & DEPENDENT UPON WEIGHT OF FILL MATERIAL, CONSULT FACTORY


FRAME MUST BE EMBEDDED IN A 6" X 6" (MINIMUM) CONCRETE COLLAR ALL AROUND TO RETAIN 2 HR U.L. LISTING. 9/16" INTUMESCENT COATING ALL AROUND TYPICAL (SUPPLIED BY BILCO) APPLIED BY OTHERS IN THE FIELD. SEE SECTION.

FOR DRY INTERIOR INSTALLATION ONLY. UNIT MUST BE PROTECTED FROM MOISTURE PRIOR TO INSTALLATION. IF EXPOSURE TO EXTERIOR CONDITIONS, MOISTURE AND/OR HIGH HUMIDITY IS ANTICIPATED, CONSULT FACTORY

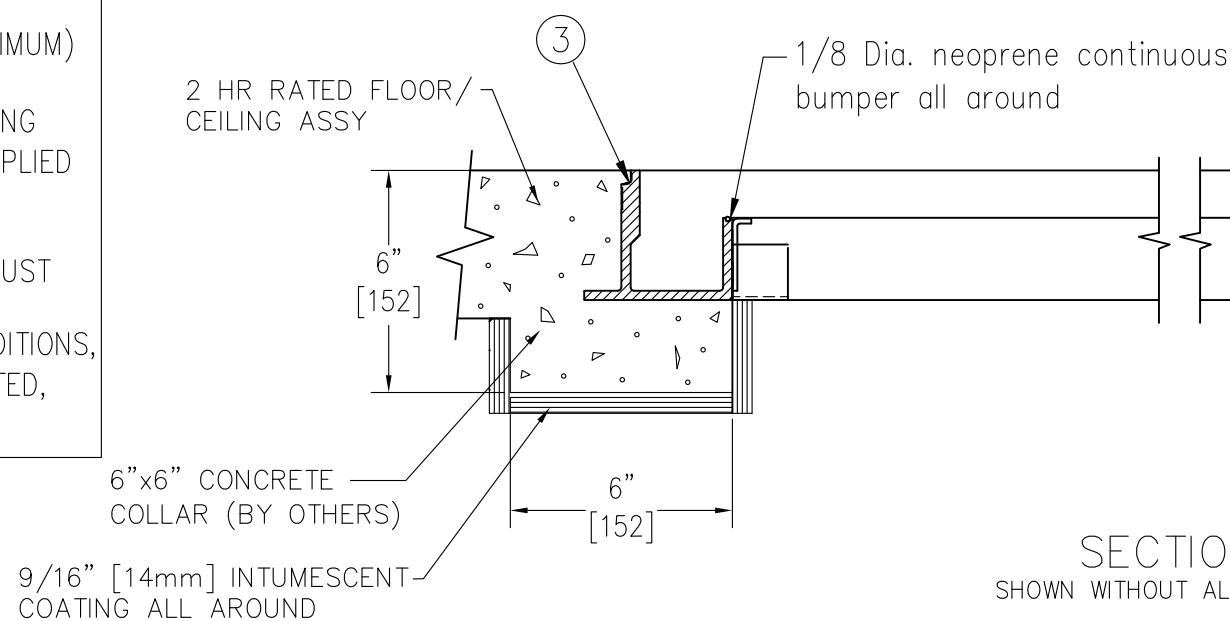


SECTION
SHOWN WITHOUT ALBI COATING

THE UNIT SHOWN ON THIS DRAWING IS NOT EQUIPPED WITH AN AUTOMATIC CLOSING SYSTEM AND MAY BE USED WHEN APPROVED BY THE AUTHORITY HAVING JURISDICTION.

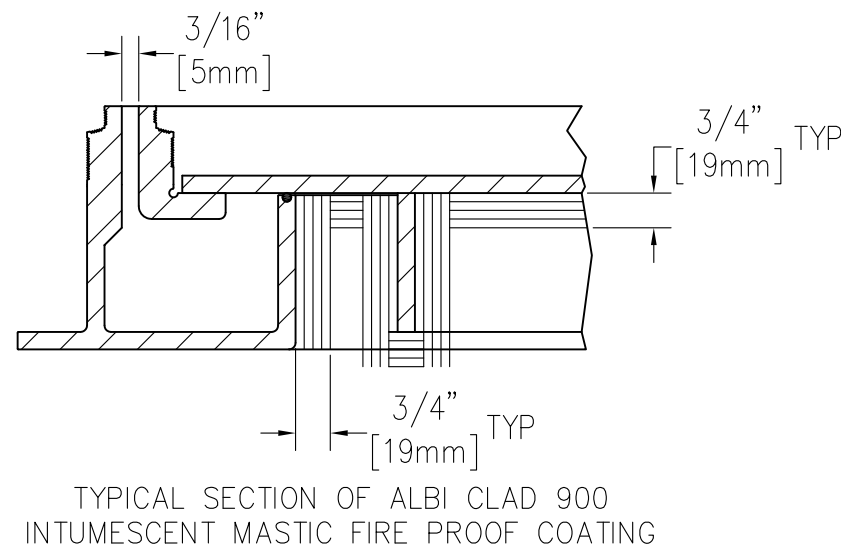

1" [25mm] MAX RECESS
1/2" [13mm] MIN CONCRETE
IN PAN REQUIRED FOR
FIRE RATING (BY OTHERS)

Frame areas that come
in contact with concrete
shall be coated with
bituminous paint

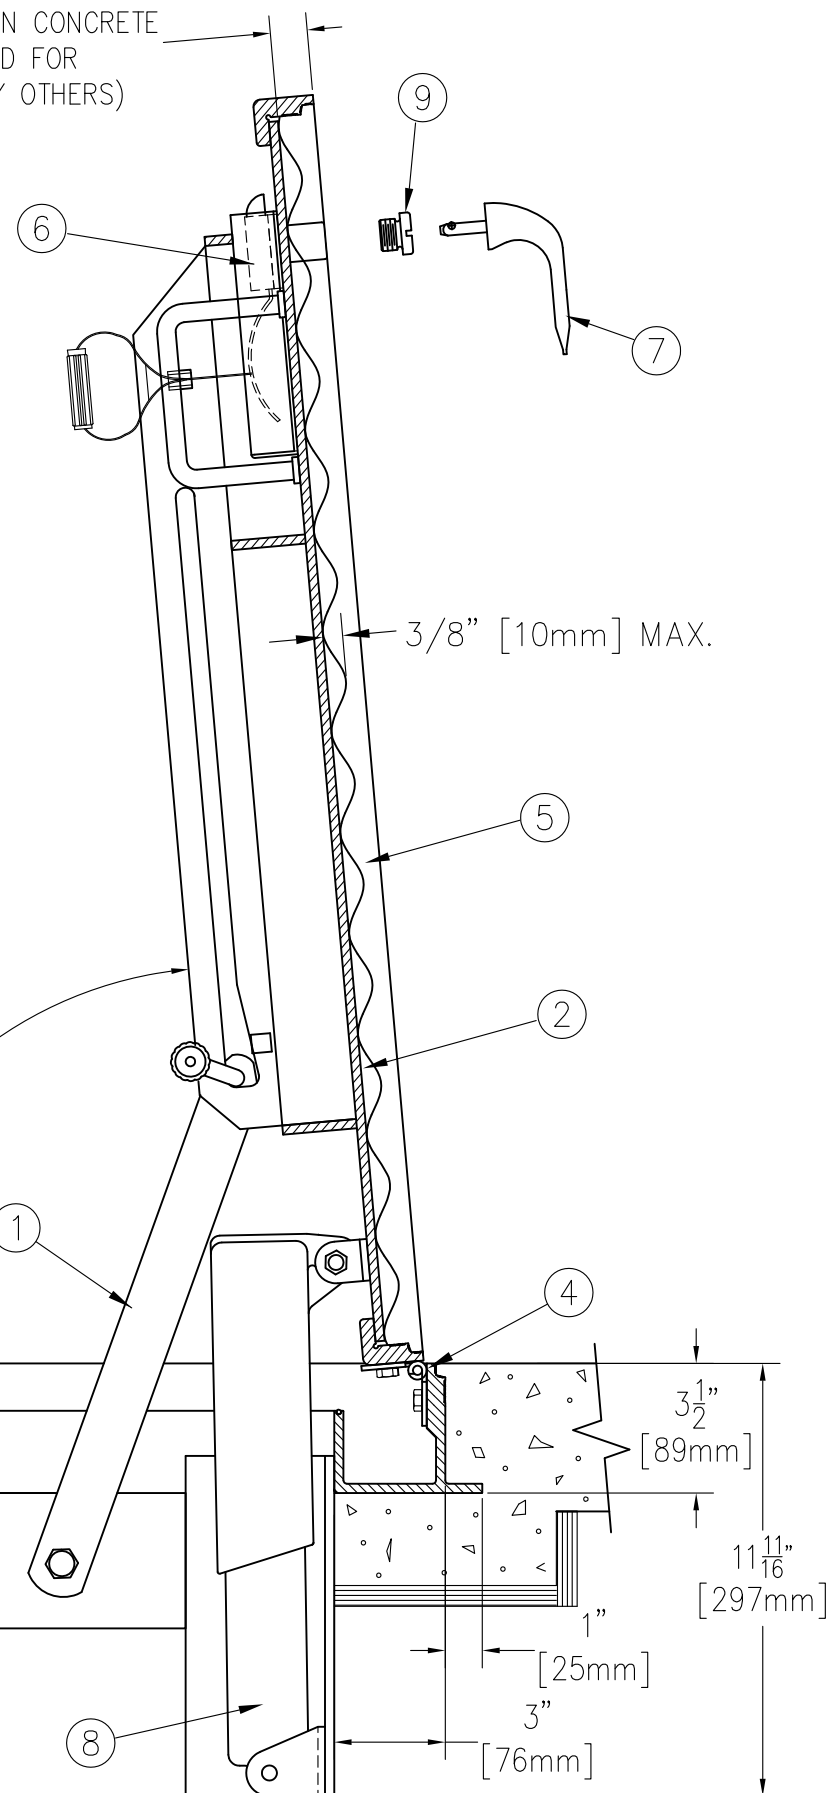

SPECIFICATIONS

1. automatic hold open arm w/ red vinyl grip
2. 1/4 Aluminum plate cover
(cover reinf. for 150 lbs per sq. foot live load)
3. 1/4" aluminum channel with extruded 1" anchor flange
4. Stainless steel 3" piano hinge
5. Terrazzo reinf. wire mesh (2"x1"x.063 Galv.)
6. Slam lock with cable and pull handle
7. Removable square key wrench
8. Lifting mechanism with reinforced composite tubes and compression springs
9. Removable cover plug
10. Guide arm (if req'd)

SHOP FINISH:

ALUMINUM: MILL FINISH

HARDWARE: ZINC PLATED & CHROMATE SEALED
(unless otherwise specified)

REINFORCED FOR 150 Lbs. PER Sq. Ft.
(732 kg. PER Sq. METER) LIVE LOAD

INSTALLER NOTES:

- A. Use caution. Cover is spring loaded. Do not remove safety shipping bolt until unit is to be installed and in normal horizontal operating position.
- B. Before anchoring in place open and close door. Check to see that the door in the closed position rests on the frame all around. If not, shim under the frame at the proper corner.
- C. See installation procedure shipped with door.

Customer:

P.O. N°

Job:

Sales Rep:



www.BestAccessDoors.ca
Fax: 1-888-828-6021
Phone: 1-800-483-0823
Email: info@BestAccessDoors.ca

SINGLE LEAF ACCESS DOOR TYPE FRLC - FIRE RATED

QTY	TYPE	SIZE	
		WIDTH	LENGTH
<input type="checkbox"/>	FR-2LC	2'-6" x 2'-6"	[762mm] x [762mm]
<input type="checkbox"/>	FR-3LC	3'-0" x 2'-6"	[914mm] x [762mm]
<input type="checkbox"/>	FR-4LC	3'-0" x 3'-0"	[914mm] x [914mm]
<input type="checkbox"/>	FR-5LC	3'-6" x 3'-6"	[1065mm] x [1065mm]
<input type="checkbox"/>	FR-6LC	2'-6" x 4'-0"	[762mm] x [1219mm]