

# BA-FW-5050

## TECHNICAL DATA SHEET



FIRE-RATED INSULATED  
ACCESS DOOR WITH  
FLANGE


SKU: **BA-FW-5050**



[CLICK TO VIEW PRICING](#)

NOMINAL DOOR SIZE W X H		WEIGHT PER DOOR		
inches	mm	Latches	lbs.	kg.
8 X 8	203 X 203	1	8	3.6
10 X 10	254 X 254	1	9	4.1
12 X 12	305 X 305	1	10	4.8
14 X 14	355 X 355	1	12	5.4
16 X 16	406 X 406	1	15	6.8
18 X 18	457 X 457	1	20	9.1
22 X 30	560 X 762	1	32	14.5
22 X 36	560 X 914	2	35	15.9
24 X 24	610 X 610	1	28	12.7
24 X 36	610 X 914	2	38	18.1
24 X 48	610 X 1220	2	48	21.3
30 X 30	762 X 762	2	38	18.1
36 X 36	914 X 914	2	54	24.5
36 X 48	914 X 1220	2	76	34.5


Wall or ceiling opening is  $W + 3/8"$  (9 mm)  
For detailed specifications see submittal sheet

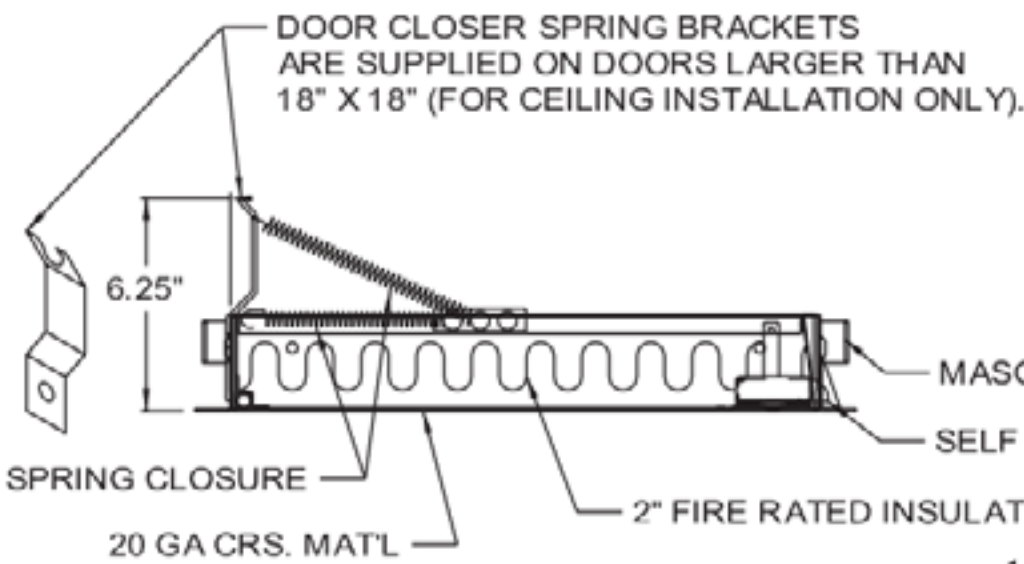

### WALLS AND CEILINGS

FOR WALLS THIS DOOR HAS A "UL" AND "ULC",  
1 1/2 HOUR "B" LABEL, WITH A MAXIMUM  
TEMPERATURE OF 250 DEGREES AFTER  
30 MINUTES.

FOR FIRE RATED CEILINGS, THIS DOOR HAS BEEN  
APPROVED BY WARNOCK HERSEY INTERNATIONAL  
FOR 3 HOURS (MAX. SIZE 24" x 36").

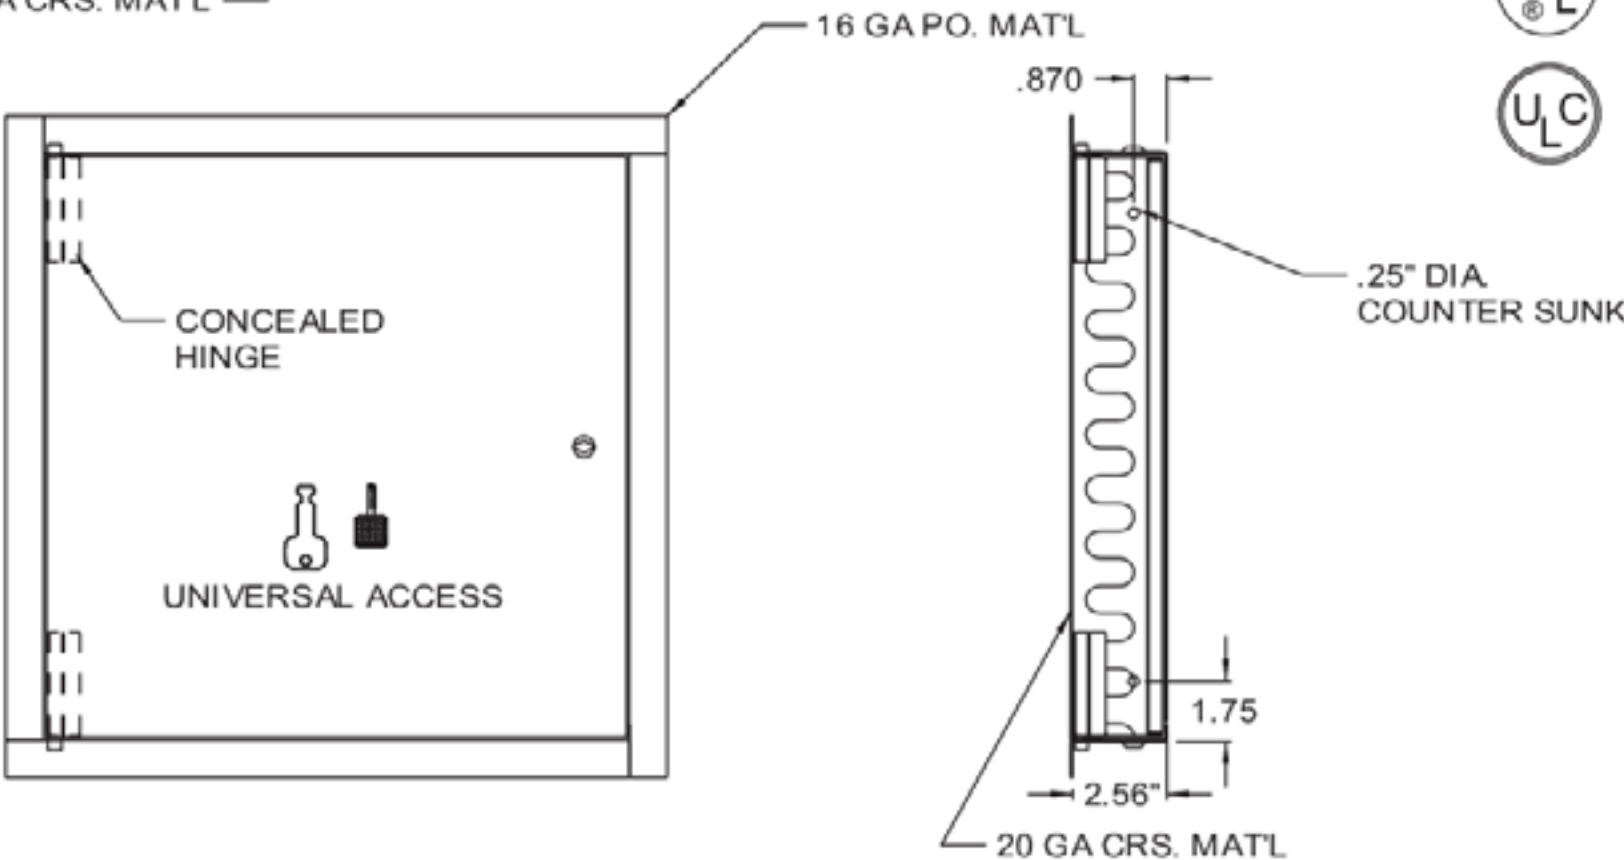

WE ALSO DO  
**CUSTOM!**

Scan to view pricing.

