



PREMIUM FLUSH MOUNTED VENT & GRILLE COVERS

Removable Access Panel

Magnetic Access Cover - Accessable Opening 12" x 12" (305mm x 305mm)
16" x 16" x 1/2" (406mm x 406mm x 12mm) over all dimensions.

Application:

- Designed for 1/2" & 5/8" thick drywall installations.
- Ceiling and wall installations.
- Water shut off valves, plumbing clean out,

Features:



- Magnetic Removable Access Door
- Flush smooth Clean Finish
- Triple Fibre Reinforced Cement Board.
- 24 gauge galvanized satin coat steel frame complete with beaded edge.
- 4 Rare Earth Magnets - .250" Diameter x .060" Thick
- Easy Installation, primed and ready for paint.
- Fire Rated, Non-Flammable.
- Impact Resistant.
- Moisture and Water Resistant, Mold Resistant.
- Eco- Friendly Manufacturing and Non-Hazardous.

Product Specifications:


- Over 64 square inches (303 Square CM) of accessible area.
- Overall dimensions 16" x 16" x 1/2" (406mm x 406mm x 12mm)

Material Specifications:

Raw Material - Maggesium sulphate cement, plant fibre, glass fibre cloth, perlite
Density - 0.95 g/cm
Water Content - 12%
Chloride Ion Content - 0%
Formaldehyde Release - 0%
Asbestos Content - 0%
Fire resistance - Incombustibility A1 Class (GB 8624-2006/EN 13501-1)
Water Absorption - 27%
Resistant Bending Strength - 8 MPa
Impact Resistance - 1.5 J/m
Nail-Withdrawal strength - 16 N/mm
Water Permeability - No water vapour after 24 hours' test
Refractoriness (Pyrometric cone Test) - 4H
pH Value - 6.7{8.0
Thermal conductivity - 0.2 W/(mK)
Moisture Movement - 0.25 %
Heat Shrinkage Rate - 0.05
Freeze Thaw - No distortion after 25 repeated cycles of freezing and thawing.

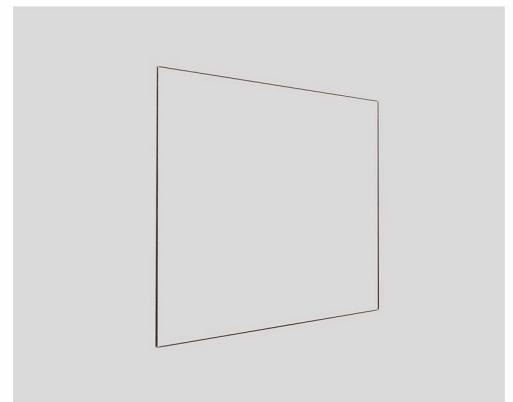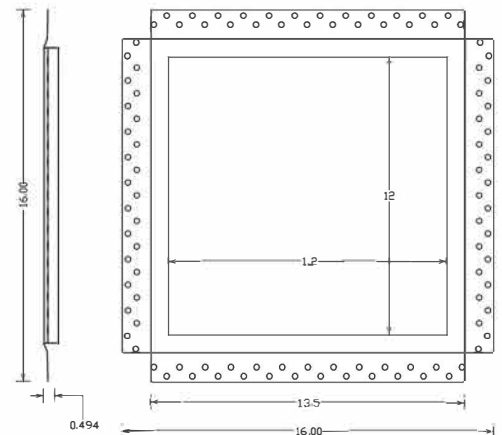

INVISAGRILLE

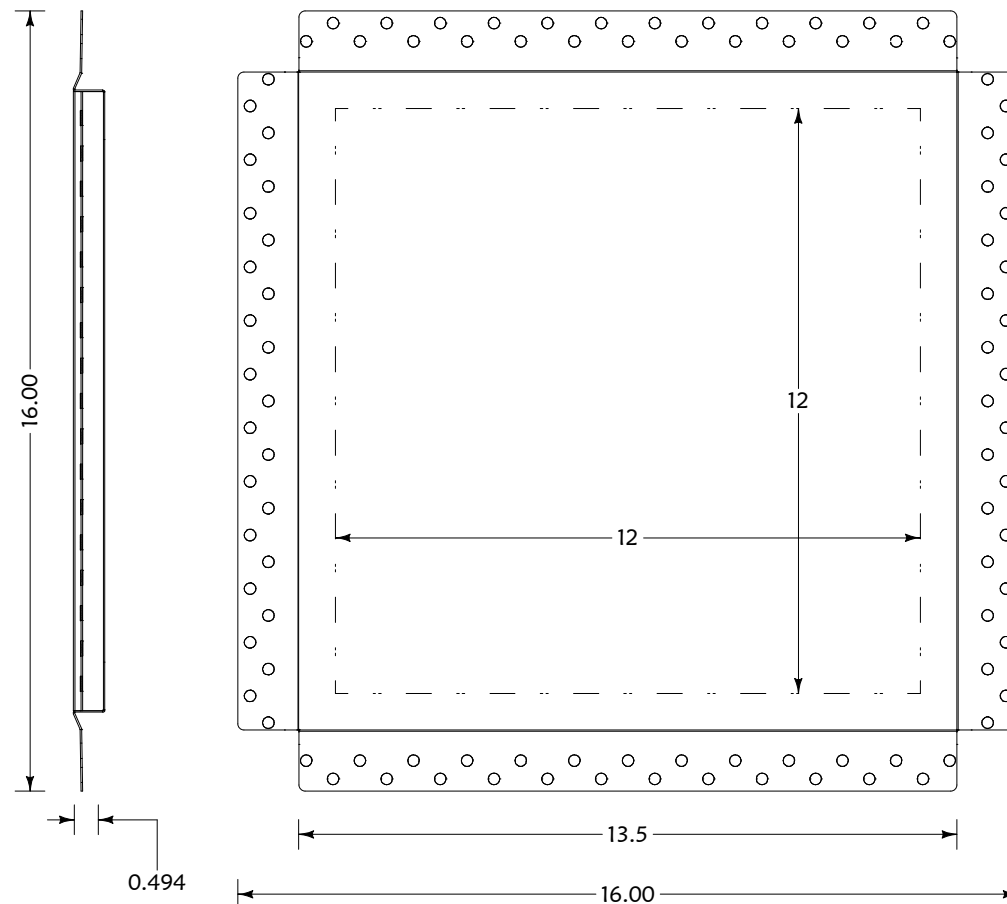

Material Specifications:

Raw Material - Magnesiumsulphatecement, plant fibre, glass fibre cloth, perlite
Density - 0.95 g/cubic cm
Water Content - 12%
ChlorideIonContent - 0%
FormaldehydeRelease - 0%
AsbestosContent - 0%
FireResistance: IncombustibilityA1Class(GB8624-2006/EN13501-1)
WaterAbsorption - 27%
ResistantBendingStrength - 8 MPa
ImpactResistance - 1.5 J/m
Nail-Withdrawalstrength - 16 N/mm
Water Permeability - Nowatervapourafter24hours'test
Refractoriness(Pyrometriccone Test) - 4H
pH Value - 6.7{8.0
Thermalconductivity - 0.2 W/(mK)
MoistureMovement - 0.25 %
HeatShrinkageRate - 0.05
Freeze Thaw - Nodistortionafter25repeatedcyclesoffreezingandthawing.

Features:

- Magnetic Removable Access Door
- Triple Fibre Reinforced Cement Board.
- Easy Installation, primed and ready for paint.
- Fire Rated, Non-Flammable.
- Impact Resistant.
- Moisture and Water Resistant, Mold Resistant.
- Eco- Friendly Manufacturing and Non-Hazardous.