



PREMIUM FLUSH MOUNTED VENT & GRILLE COVERS

**Removable Cold Air Return Cover**

Magnetic Mud in Grille Cover - Duct opening 30" x 8  
 32" x 12-1/4" x 1/2" (813mm x 311mm x 13mm) over all dimensions.  
 Vented opening - 30" x 8

**Application:**

- Designed for 1/2" & 5/8" thick drywall installations.
- Low and high wall installations.

**Features:**


- Removable Triple Fibre Reinforced Concrete Board Grille.
- 24 gauge galvanized satin coat steel frame
- 4 Rare Earth Magnets - .250" Diameter x .060" Thick
- Easy Installation, primed and ready for paint.
- 20 degree angled vent slots for directional venting.
- Fire Rated, Non-Flammable.
- Impact Resistant.
- Moisture and Water Resistant, Mold Resistant.
- Eco- Friendly Manufacturing and Non-Hazardous.

**Product Specifications:**

- Over 47 square inches (303 Square cm) of open area.
- Slot Size - .32" X 5.7" (8mm X 158mm) - 26 Angled Slots
- Overall dimensions 1/2" X 12-1/4" x 32"


**Material Specifications:**

- Raw Material - Magnesium sulphate cement, plant fibre, glass fibre cloth, perlite
- Density - 0.95 g/cm<sup>3</sup>
- Water Content - 12%
- Chloride Ion Content - 0%
- Formaldehyde Release - 0%
- Asbestos Content - 0%
- Fire resistance - Incombustibility A1 Class (GB 8624-2006/EN 13501-1)
- Water Absorption - 27%
- Resistant Bending Strength - 8 MPa
- Impact Resistance - 1.5 J/m
- Nail-Withdrawal strength - 16 N/mm
- Water Permeability - No water vapour after 24 hours' test
- Refractoriness (Pyrometric cone Test) - 4H
- pH Value - 6.7{8.0
- Thermal conductivity - 0.2 W/(mK)
- Moisture Movement - 0.25 %
- Heat Shrinkage Rate - 0.05
- Freeze Thaw - No distortion after 25 repeated cycles of freezing and thawing.

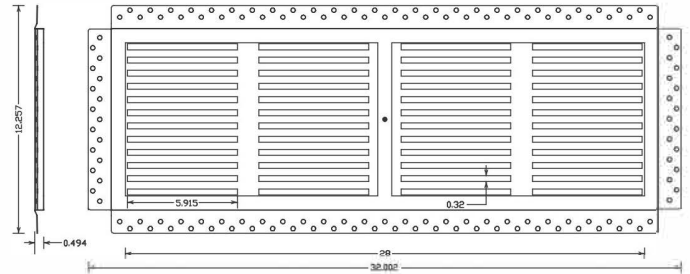

INVISAGRILLE

**BEST  
ACCESS  
DOORS**

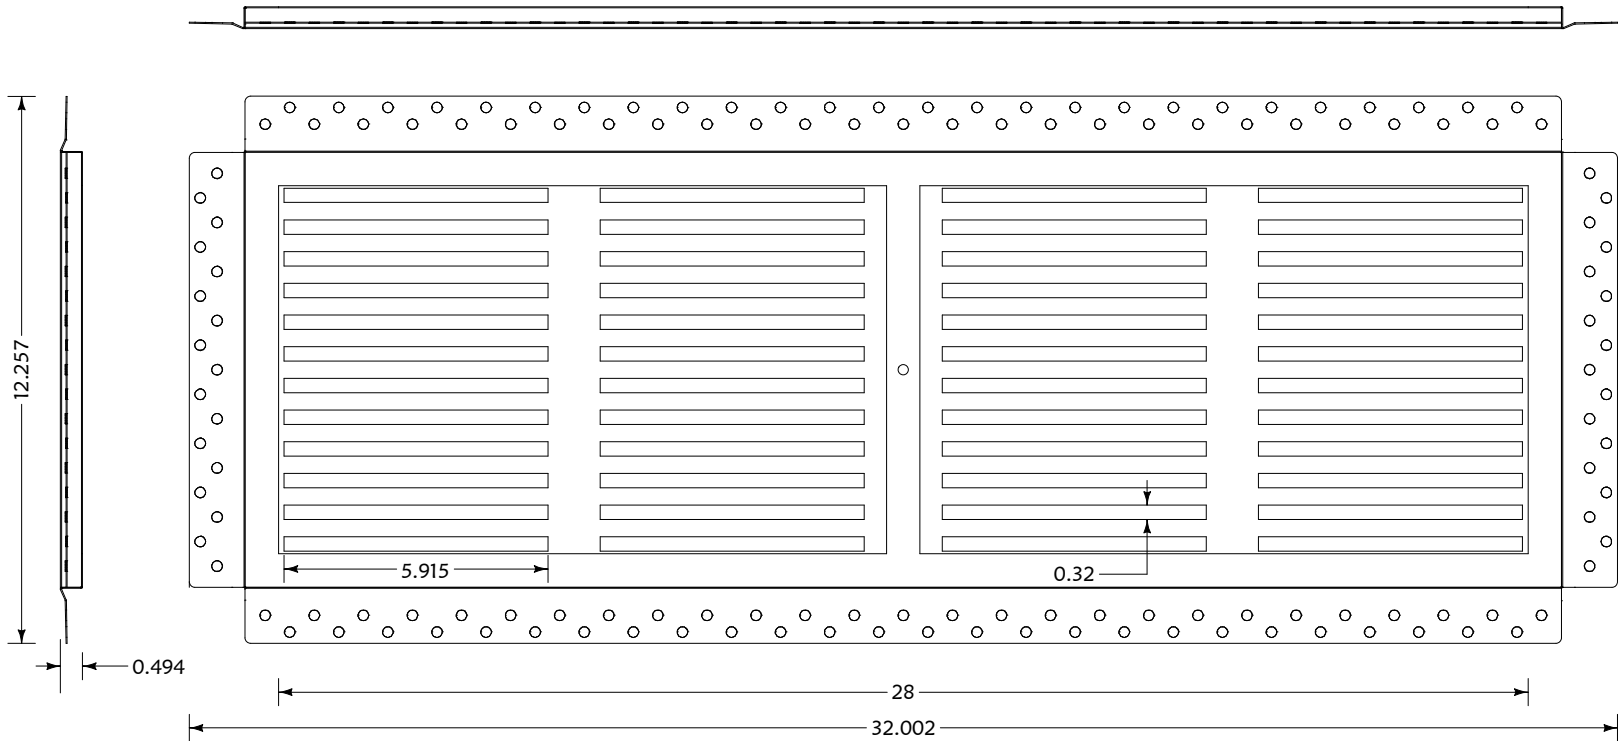

## Material Specifications:

Raw Material - Magnesiumsulphatecement, plant fibre, glass fibre cloth, perlite  
Density - 0.95 g/cubic cm  
Water Content - 12%  
ChloridelonContent - 0%  
FormaldehydeRelease - 0%  
AsbestosContent - 0%  
FireResistance: IncombustibilityA1Class(GB8624-2006/EN13501-1)  
WaterAbsorption - 27%  
ResistantBendingStrength - 8 MPa  
ImpactResistance - 1.5 J/m  
Nail-Withdrawalstrength - 16 N/mm  
Water Permeability - Nowatervapourafter24hours'test  
Refractoriness(Pyrometriccone Test) - 4H  
pH Value - 6.7{8.0  
Thermalconductivity - 0.2 W/(mK)  
MoistureMovement - 0.25 %  
HeatShrinkageRate - 0.05  
Freeze Thaw - Nodistortionafter25repeatedcyclesoffreezingandthawing.

## Features:

- Magnetic Removable Grille
- Triple Fibre Reinforced Cement Board.
- Easy Installation, primed and ready for paint.
- Machined outer edge to allow for screws, tape and drywall compound.
- 20 degree angled vent slots for directional venting.
- Fire Rated, Non-Flammable.
- Impact Resistant.
- Moisture and Water Resistant, Mold Resistant.
- Eco-Friendly Manufacturing and Non-Hazardous.