



PREMIUM FLUSH MOUNTED VENT & GRILLE COVERS

Removable 4x10 Ceiling Vent Cover

Magnetic Mud in Grille Cover - Duct opening 4" x 10"
 13.5" x 7.5" x 1/2" (343mm x 190.5mm x 13mm) over all dimensions.
 Vented opening area - 9" x 3"

Application:



- Designed for 1/2" & 5/8" thick drywall installations.
- Ceiling and wall installations.

Features:

- Magnetic Removable Triple Fibre Reinforced Concrete Board Grille
- 24 gauge galvanized satin coat steel frame with adjustable difusser
- 4 Rare Earth Magnets - .250" Diameter x .060" Thick
- Easy Installation, primed and ready for paint.
- rectangular vent slots.
- Fire Rated, Non-Flammable.
- Impact Resistant.
- Moisture and Water Resistant, Mold Resistant.
- Eco-Friendly Manufacturing and Non-Hazardous.


Product Specifications:

- Over 9.8 square inches (63.5 Square CM) of open area.
- Slot Size - .26" x 2.9" (6.6mm x 74mm) - 13 rectangular slots
- Overall dimensions 1/2" x 13 1/2" x 7 1/2" x 1/2" (343mm x 190.5mm x 13mm)

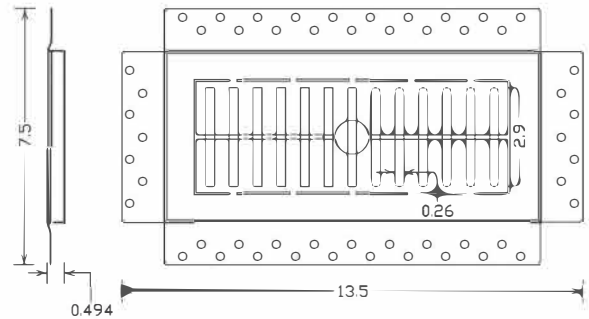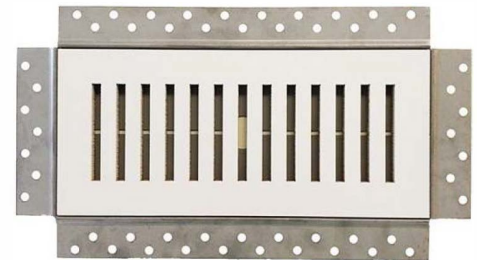


Material Specifications:

- Raw Material - Magnesium sulphate cement, plant fibre, glass fibre cloth, perlite
- Density - 0.95 g/cm³
- Water Content - 12%
- Chloride Ion Content - 0%
- Formaldehyde Release - 0%
- Asbestos Content - 0%
- Fire resistance - Incombustibility A1 Class (GB 8624-2006/EN 13501-1)
- Water Absorption - 27%
- Resistant Bending Strength - 8 MPa
- Impact Resistance - 1.5 J/m
- Nail-Withdrawal strength - 16 N/mm
- Water Permeability - No water vapour after 24 hours' test
- Refractoriness (Pyrometric cone Test) - 4H
- pH Value - 6.7{8.0
- Thermal conductivity - 0.2 W/(mK)
- Moisture Movement - 0.25 %
- Heat Shrinkage Rate - 0.05
- Freeze Thaw - No distortion after 25 repeated cycles of freezing and thawing.

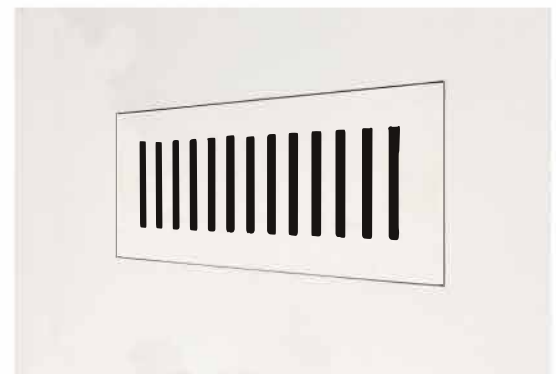

INVISAGRILLE

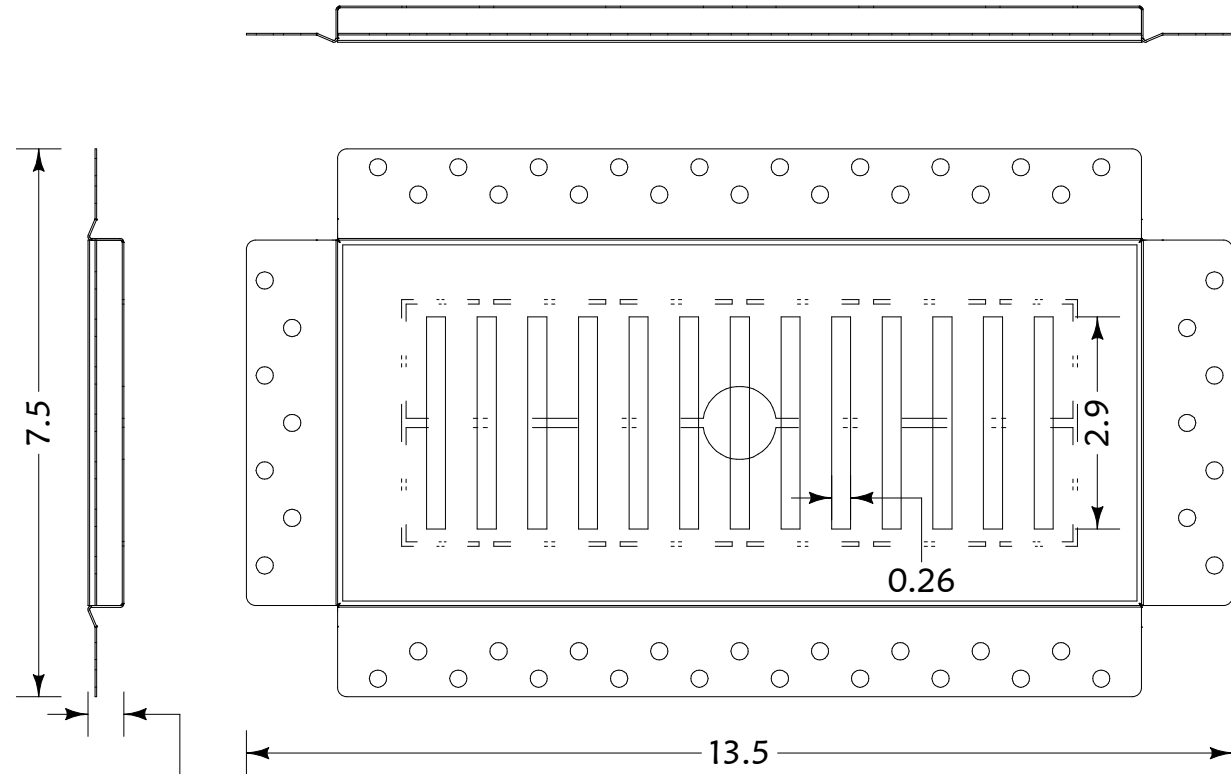

Material Specifications:

Raw Material - Magnesium sulphate cement, plant fibre, glass fibre cloth, perlite
Density - 0.95 g/cubic cm
Water Content - 12%
Chloride Ion Content - 0%
Formaldehyde Release - 0%
Asbestos Content - 0%
Fire resistance: Incombustibility A1 Class (GB8624-2006/EN13501-1)
Water Absorption - 27%
Resistant Bending Strength - 8 MPa
Impact Resistance - 1.5 J/m
Nail-Withdrawal strength - 16 N/mm
Water Permeability - No water vapour after 24 hours test
Refractoriness (Pyrometric cone Test) - 4H
pH Value - 6.7 {8.0
Thermal conductivity - 0.2 W/(mK)
Moisture Movement - 0.25 %
Heat Shrinkage Rate - 0.05
Freeze Thaw - No distortion after 25 repeated cycles of freezing and thawing.

Features:

- Magnetic Removable Grille
- Triple Fibre Reinforced Cement Board.
- Easy Installation, primed and ready for paint.
- Machined outer edge to allow for screws, tape and drywall compound.
- 20 degree angled vent slots for directional venting.
- Fire Rated, Non-Flammable.
- Impact Resistant.
- Moisture and Water Resistant, Mold Resistant.
- Eco- Friendly Manufacturing and Non-Hazardous.