




HIGH SECURITY ACCESS DOOR FOR ALL SURFACE TYPES

BA-PHS

INSTALLATION

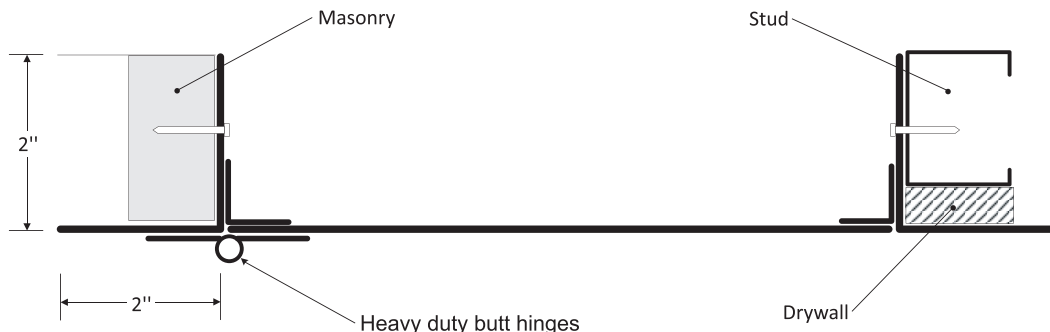


DIMENSIONS AND APPEARANCE

LEED ready: This product contributes to LEED® credits.

DOOR SIZE - W x H INCHES (MM)	WEIGHT LBS KG
12 x 12 (304 x 304)	22 10
16 x 16 (406 x 406)	30 13.6
18 x 18 (457 x 457)	34 15.4
24 x 24 (609 x 609)	49 22.2
24 x 30 (609 x 762)	57 25.9
24 x 36 (609 x 914)	65 29.5
36 x 36 (914 x 914)	86 39
Rough wall opening is door size + 1/4" or + 6mm	

**Your odd sizes:
Made in 5 days**

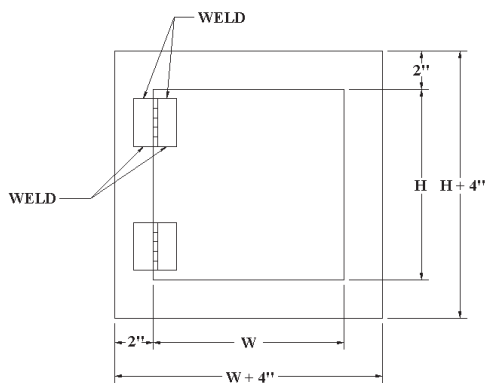

Lock and cylinder optional

DESCRIPTION AND MATERIAL SPECIFICATION

Material: 10 gauge cold rolled steel plate
2" x 2" x 3/16" thick angle frame

Hinge: 3" x 3" (13 Ga Steel) heavy duty butt hinges
13 gauge cold rolled steel

Lock / latch: as per customer's request

Finish: high quality white powder coat primer

Packaging: individually wrapped, 1 per box

POPULAR OPTIONS

Lock / latch:

For complete list of options
go to: www.BestAccessDoors.ca

mortise preparation (cylinder optional),
mortise deadbolt lock,
mortise preparation for detention lock



PROJECT DATA

PROJECT NAME:	QTY	W	H	OPTIONS
ARCHITECT:				
DEALER:				
CONTRACTOR:				
LOCATION:	SPECIAL INSTRUCTIONS:			
DATE:				
TAGGING INSTRUCTIONS:	SUBMITTAL APPROVAL: (signature or stamp)			

ADDRESS: Box 30021 - RPO Upper James St, Hamilton, Ontario, L9B 0E4

Tel.: 1-800-483-0823

Fax: 1-888-828-6021

www.BestAccessDoors.ca
sales@bestaccessdoors.ca