


Best Access Doors SUBMITTAL / TECHNICAL DATA SHEET

FLUSH ALUMINUM FLOOR HATCH

BA-PPA

INSTALLATION

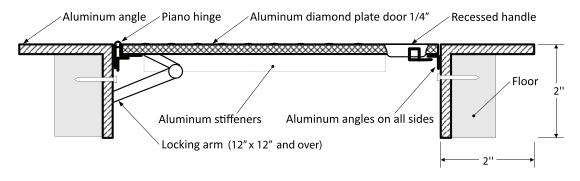


DIMENSIONS AND APPEARANCE

LEED ready: This product contributes to LEED® credits.

HATCH SIZE - W x H INCHES (MM)	NUMBER OF LOCKS	WEIG LBS	SHT KG			
24 x 24 (609 x 609)	1	35	15.9			
24 x 36 (609 x 914)	1	44	20			
Rough floor opening is door size + 1/2" or + 13mm						

Your odd sizes: Made in 10 days

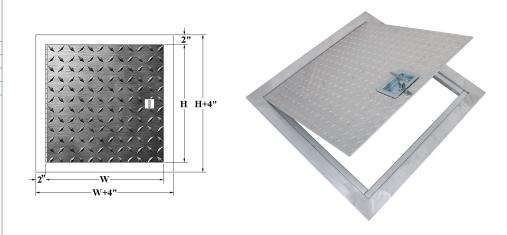

DESCRIPTION AND MATERIAL SPECIFICATION

Material: DOOR: aluminum diamond plate 1/4"

FRAME: 2" x 2" x 1/4" aluminum angle

Hinge: heavy duty aluminum continuous

piano hinge (0.080")

Lock / latch: recessed handle operated cam latch

POPULAR For complete list of options

OPTIONS go to: www.BestAccessDoors.ca

Lock / latch: Key operated recessed handle cam Latch

Recess: recessed floor hatch optional - see PPA-RE model

Caution: The PPA floor access door is designed to support a

live load of 300 pounds/sq.foot and includes a hold open arm to keep the door in an open position.





PROJECT DATA

PROJECT NAME:	QTY	W	Н	OPTIONS	
ARCHITECT:					
DEALER:					
CONTRACTOR:					
LOCATION:	SPECIAL INSTRUCTIONS:				
DATE:					
TAGGING INSTRUCTIONS:	SUBMITTAL APPROVAL: (signature or stamp)				

ADDRESS: Box 30021 - RPO Upper James St, Hamilton, Ontario, L9B 0E4

Tel.: 1-800-483-0823 Fax: 1-888-828-6021 www.BestAccessDoors.ca sales@bestaccessdoors.ca