



Quality Access Doors- FAST!

SUBMITTAL/TECHNICAL DATA SHEET

DESCRIPTIONS

Oversized Attic Access Door allows access into ceilings when over-sized or double door applications are required. The double leaf design allows objects to clear which may interfere with door openings.

FEATURES

- Fire-Rated
- Self-Closing by Gravity
- Ceiling Installation
- Custom Sizing

SPECIFICATIONS

MODEL: BFRD

DOOR: 18 gauge Steel

FRAME: 16 gauge Steel

SIZE:
Min: 36 inches by 60 inches
Max: 48 inches by 60 inches

INSTALLATION: Wall

FLANGE: Flush Continuous Piano

HINGE: Concealed Continuous Piano

FINISH: White Powder Coat

WARRANTY: 1 year

OPTIONS: Flanges, Latches, Materials, Gaskets, Anchors

CERTIFICATION:
Warnock-Hersey listed for 2 hours (Standard)
Warnock-Hersey listed for 3 hours (With T options)

SKU: **BAG-BFRD**

FIRE-RATED OVERSIZED ATTIC ACCESS DOOR



DIMENSIONS AND APPEARANCE


>> CLICK TO VIEW ADDITIONAL DETAILS AND PRICING <<

ORDER GUIDE:

BASE	WIDTH	X	LENGTH	OPTIONS
BFRD				
	STANDARD SIZES (in.)			C - Ceiling Application D - Double Door M - Mortise Lock (1-1/8") Prep S - Stainless Steel, Type 304 T - 3-Hour Rated W - Wall Application
			36 X 60	
			40 X 60	
			48 X 60	

Rough opening is door size.
Additional sizes available, call for more information.

For Detailed Specifications See Submittal Sheet

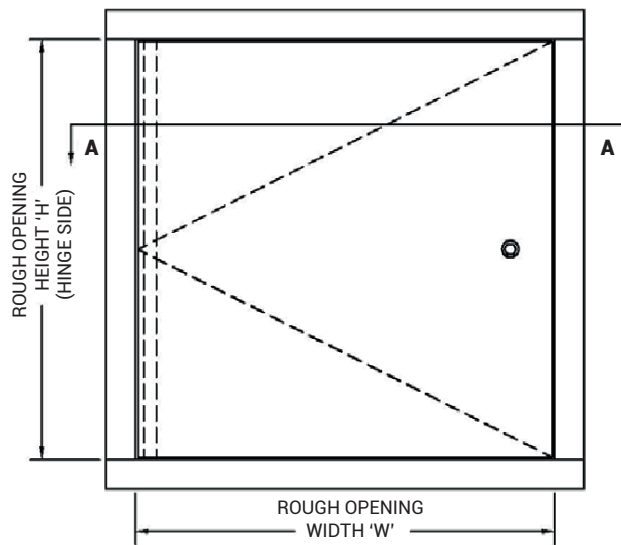

FRD wall and ceiling fire-rated panels are manufactured under the factory inspection service of Intertek (Warnock Hersey) and have a label reading: "Listed access frame and insulated fire door assembly 2 hour fire rating. Vertical and Horizontal Installation."

Temperature rise maximum 139°C/ 250°F at 30 minutes, 250°C/450°F at 60 minutes.

For a complete list of options visit www.BestAccessDoors.ca

PROJECT DATA

Custom Sizes Available - Fast!

Scan or Click



To view Pricing and Additional Product Info.

PROJECT NAME :	QTY	W	H	OPTIONS
ARCHITECT :				
DEALER :				
CONTRACTOR :				
LOCATION :	SPECIAL INSTRUCTIONS :			
DATE :				
TAGGING INSTRUCTIONS :	SUBMITTAL APPROVAL : (signature or stamp)			

TELEPHONE:
1-800-483-0823

FAX:
1-888-828-6021



385 WILSON STREET EAST,
SUITE 302
ANCASTER, ON, L9G 2C1
CANADA



WEBSITE:
www.BestAccessDoors.ca

E-MAIL:
info@bestaccessdoors.ca

BAC-BFRD

UPWARD OPENING ACCESS DOOR

STANDARD SIZES
single leaf construction for walls & ceilings

QTY	Rough Opening Size WxH		QTY of Latches or Locks	Weight in KGs.	Weight in lbs.
	Metric (mm)	Inches			
	610 x 1219	24 x 48	2	24.94	55.00
	762 x 762	30 x 30	1	19.50	43.00
	762 x 914	30 x 36	2	23.13	51.00
	762 x 1219	30 x 48	2	29.93	66.00
	813 x 813	32 x 32	2	22.22	49.00
	914 x 914	36 x 36	2	27.21	60.00

single leaf construction for walls only.

QTY	Rough Opening Size WxH		QTY of Latches or Locks	Weight in KGs.	Weight in lbs.
	Metric (mm)	Inches			
	914 x 1219	36 x 48	2	34.92	77.00
	914 x 1524	36 x 60	2	43.99	97.00
	1016 x 1016	40 x 40	2	32.65	72.00
	1016 x 1219	40 x 48	2	38.10	84.00
	1016 x 1524	40 x 60	2	47.62	105.00
	1219 x 1219	48 x 48	2	44.45	98.00
	1219 x 1524	48 x 60	2	55.33	122.00

NET OPENING =
WIDTH MINUS 77mm [3"]
HEIGHT MINUS 39mm [1 1/2"]

* **BOLD** VALUES ARE HINGE SIDE

NOTES:

- MATERIAL** - SATIN FINISH GALVANIZED (GALVANNEALED) STEEL.
- PANEL** - 1.31mm (18 ga.).
- LINER** - 0.85mm (22 ga.).
- FRAME** - 1.61mm (16 ga.) UP TO 762mm x 1219mm (30" x 48"). LARGER SIZES: 1.99mm (14ga.)
- FLANGE** - 22mm (7/8") EXTERIOR FLANGE UP TO AND INCLUDING 914mm x 914mm (36" x 36"). LARGER SIZES: 32mm (1 1/4").
- HINGE** - CONTINUOUS ROD HINGE. PIANO HINGE STANDARD ON PANELS EXCEEDING 1219mm (48") IN A WALL POSITION.
- LATCH** - 1/4" ALLEN KEY, WITH INTERIOR RELEASE
- INSULATION** - 38mm (1 1/2") HIGH TEMPERATURE
- FINISH** - RUST INHIBITIVE PRIME COAT (OFF-WHITE).

OPTIONS: * - DENOTES ADDITIONAL COST.

- * ■ - OPTIONAL MATERIAL - 304 STAINLESS STEEL WITH A NO. 4 POLISHED FINISH ON THE EXTERIOR SURFACE
- * ■ - CONTINUOUS PIANO HINGE.
- * ■ - MASONRY ANCHORS ATTACHED.
- - ALLEN KEY
- - RAISED KNURLED KNOB.
- * ■ - NON-LOCKING HANDLE.
- * ■ - 1 1/8" MORTISE PREP ONLY.
- * ■ - 1 1/8" MORTISE PREP COMPLETE WITH MORTISE CYLINDER.

