



Quality Access Doors- FAST!

SUBMITTAL/TECHNICAL DATA SHEET

DESCRIPTIONS

Plastic Access Door provides simple and inexpensive access through wall or ceiling surfaces in residential or light-duty applications. The lightweight design with a removable door is easily installed by applying glue or adhesive to the back of the frame.

FEATURES

- Removable Door
- Wall or Ceiling Installation
- Paintable Finish

SPECIFICATIONS

MODEL: BPL

DOOR: 1/8 inch Plastic

FRAME: 1/8 inch Plastic

SIZE:

Min: 6 inches by 9 inches

Max: 14 inches by 29 inches

INSTALLATION: Wall or Ceiling

FLANGE: Exposed

HINGE: None

FINISH: White, Grip

WARRANTY: 1 year



SKU: **BAC-BPL**

PLASTIC ACCESS DOOR





DIMENSIONS AND APPEARANCE


>> [CLICK TO VIEW ADDITIONAL DETAILS AND PRICING <<](#)

ORDER GUIDE:

BASE	WIDTH	X	HEIGHT
BPL			
STANDARD SIZES			
	4" X 6"	14" X 14"	
	6" X 9"	14" X 29"	
	8" X 8"	22" X 22"	

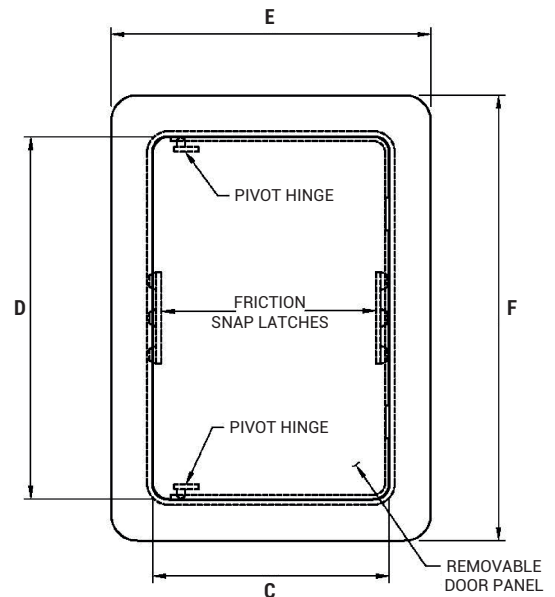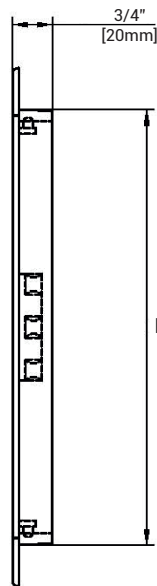

FOR DETAILED SPECIFICATIONS SEE SUBMITTAL SHEET

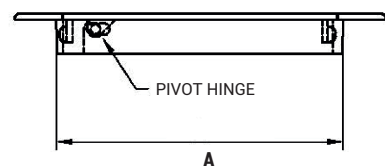



For a complete list of options visit www.BestAccessDoors.ca

PROJECT DATA

Custom Sizes Available - Fast!

PROJECT NAME :	QTY	W	H	OPTIONS
ARCHITECT :				
DEALER :				
CONTRACTOR :				
LOCATION :	SPECIAL INSTRUCTIONS :			
DATE :				
TAGGING INSTRUCTIONS :	SUBMITTAL APPROVAL : (signature or stamp)			

Scan  or  Click



To view Pricing and Additional Product Info.

TELEPHONE:
1-800-483-0823

FAX:
1-888-828-6021



385 WILSON STREET EAST,
SUITE 302
ANCASTER, ON, L9G 2C1
CANADA



WEBSITE:
www.BestAccessDoors.ca


E-MAIL:
info@bestaccessdoors.ca

BAC-BPL

PLASTIC ACCESS DOOR

QTY	MODEL	STANDARD SIZE W x H		ROUGH OPENING SIZE		DOOR SIZE		OVERALL SIZE		WT./DOOR	
		Inches	Metric (mm)	A	B	C	D	E	F	LBS.	KG.
	PL-0406	4 x 6	102 x 152	4" (102)	6" (152)	3 ³ / ₄ " (95)	5 ³ / ₄ " (145)	5 ¹ / ₁₆ " (129)	7 ¹ / ₈ " (181)	0.5	0.25
	PL-0609	6 x 9	152 x 229	6" (152)	9" (229)	5 ³ / ₄ " (145)	8 ³ / ₄ " (222)	7 ¹¹ / ₁₆ " (195)	10 ³ / ₄ " (273)	0.5	0.25
	PL-0808	8 x 8	203 x 203	8" (203)	8" (203)	7 ³ / ₄ " (196)	7 ³ / ₄ " (196)	9 ³ / ₄ " (247)	9 ³ / ₄ " (247)	0.5	0.25
	PL-1212	12 x 12	305 x 305	11 ¹³ / ₁₆ " (300)	11 ¹³ / ₁₆ " (300)	11 ¹ / ₂ " (292)	11 ¹ / ₂ " (292)	14 ¹ / ₁₆ " (357)	14 ¹ / ₁₆ " (357)	0.5	0.25
	PL-1414	14 x 14	356 x 356	14" (355)	14" (355)	13 ¹¹ / ₁₈ " (348)	13 ¹¹ / ₁₈ " (348)	16 ¹ / ₄ " (412)	16 ¹ / ₄ " (412)	0.75	0.33
	PL-2222	22 x 22	559 x 559	22" (559)	22" (559)	21 ³ / ₄ " (552)	21 ³ / ₄ " (552)	24 ¹³ / ₁₆ " (630)	24 ¹³ / ₁₆ " (630)	5.0	2.27

* **BOLD VALUES ARE HINGE SIDE**

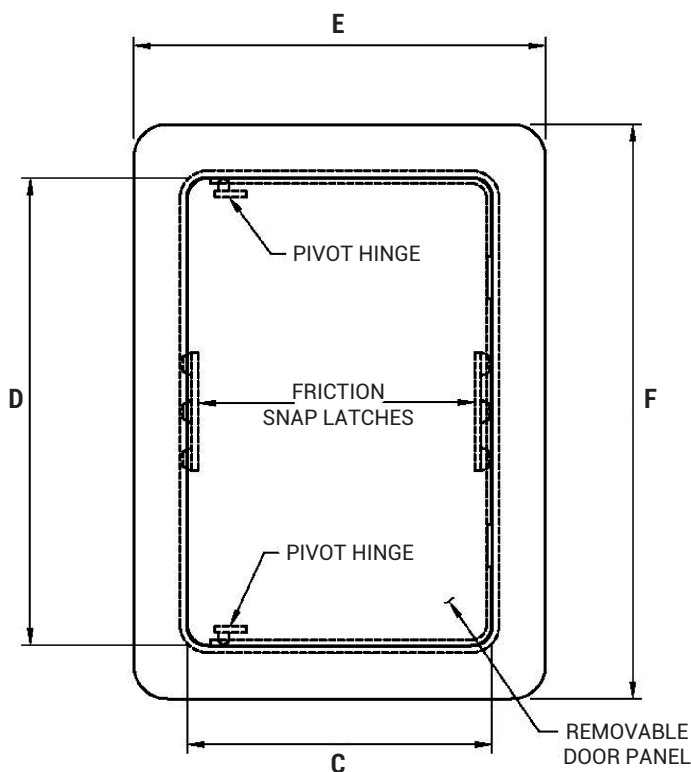

SPECIFICATIONS:

DOOR / DOOR FRAME:

- X" [3mm] HIGH IMPACT STYRENE WITH U.V. STABILIZERS.
- DOOR PANEL IS BOTH HINGED AND REMOVABLE FOR UNOBSTRUCTED ACCESS.
- DOOR PANEL IS HELD CLOSED BY FRICTION SNAP LATCHES.
- FINISH IS WHITE WITH TEXTURED EXPOSED SURFACE READY FOR PAINTING OR WALLPAPERING.
- DOOR HAS A TAPERED FRAME AND IS EASILY INSTALLED BY PRESS FIT INTO AN OPENING CUT TO SIZE OR BY APPLYING CAULKING ADHESIVE TO THE BACK OF THE FRAME AND PRESSING INTO PLACE.

