



Quality Access Doors - FAST!

SUBMITTAL/TECHNICAL DATA SHEET

SKU: **BAC-DSH**

ALUMINUM DOUBLE LEAF SMOKE VENT



SPECIFICATIONS

01. Frame with capflashing (corners full welded)
DSH - 14 Gauge paint bond galv. Steel
DSH A - 14 Gauge paint bond galv. Steel
DSH B - 11 Gauge aluminum
02. Pintle hinge
03. EPDM gasket (All around frame)
04. Cover gauge
DSH - 14 Gauge paint bond galv. Steel
DSH A - 11 Gauge aluminum
DSH B - 11 Gauge aluminum
05. Cover liner
DSH - 22 Gauge paint bond galv. Steel
DSH A - 18 Gauge aluminum
DSH B - 18 Gauge aluminum
06. Gas springs with integral damper & hold open feature
07. 1" rigid fiberboard insulation
08. Fixed center drain
09. 165° fusible link (extra link provided)
10. Thermolatch II® positive hold/release mechanism
11. Cover restraint cable
12. 1" Fiberglass cover insulation
DSH60120A - 2" fiberglass cover insulation
DSH60120B - 2" fiberglass cover insulation
13. Hold open pin release
14. Pull grip to open from inside 1/8" DIA. steel cable
15. Pull grip to open from outside 1/8" DIA. steel cable
16. Cover latch bracket
17. Bilclip® flashing system

SHOP FINISH:

Steel: Red oxide primer

Aluminum: Mill finish

Hardware: Zinc plated & chromate sealed
(Unless otherwise specified)

This product may be installed on either a flat or sloping roof. When installed on a slope, The hinge side must run parallel with the slope exceeds 30°. Advise factory for modification.

For a complete list of options visit
www.BestAccessDoors.ca


DIMENSIONS AND APPEARANCE

>> CLICK TO VIEW ADDITIONAL DETAILS AND PRICING <<


STANDARD SIZE CHART:

STEEL	STEEL/ALUM	ALUM	SIZE WIDTH X LENGTH
DSH4848	DSH4848A	DSH4848B	4'-0" x 4'-0" [1220mm] X [1220mm]
DSH4872	DSH4872A	DSH4872B	4'-0" x 6'-0" [1220mm] X [1830mm]
DSH4890	DSH4890A	DSH4890B	4'-0" x 7'-6" [1220mm] X [2285mm]
DSH4896	DSH4896A	DSH4896B	4'-0" x 8'-0" [1220mm] X [2440mm]
DSH6060	DSH6060A	DSH6060B	5'-0" x 5'-0" [1525mm] X [1525mm]
DSH6072	DSH6072A	DSH6072B	5'-0" x 6'-0" [1525mm] X [1830mm]
DSH6084	DSH6084A	DSH6084B	5'-0" x 7'-0" [1525mm] X [2135mm]
DSH6096	DSH6096A	DSH6096B	5'-0" x 8'-0" [1525mm] X [2440mm]
DSH60120	DSH60120A	DSH60120B	5'-0" x 10'-0" [1525mm] X [3050mm]
DSH6666	DSH6666A	DSH6666B	5'-0" x 5'-6" [1525mm] X [1675mm]
DSH66144	DSH66144A	DSH66144B	5'-0" x 12'-0" [1525mm] X [3660mm]
DSH7272	DSH7272A	DSH7272B	6'-0" x 6'-0" [1830mm] X [1830mm]

DSH 66144, DSH66144A & DSH-66144B HAS (4) COVERS

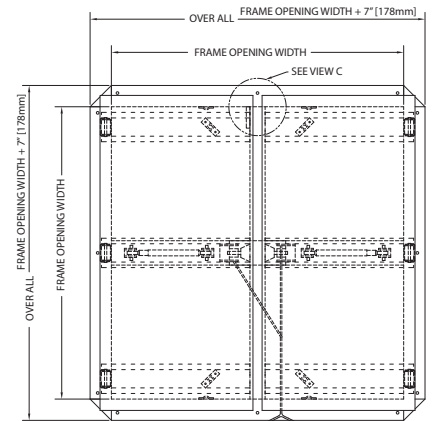

FOR DETAILS
SEE THE SECOND PAGE

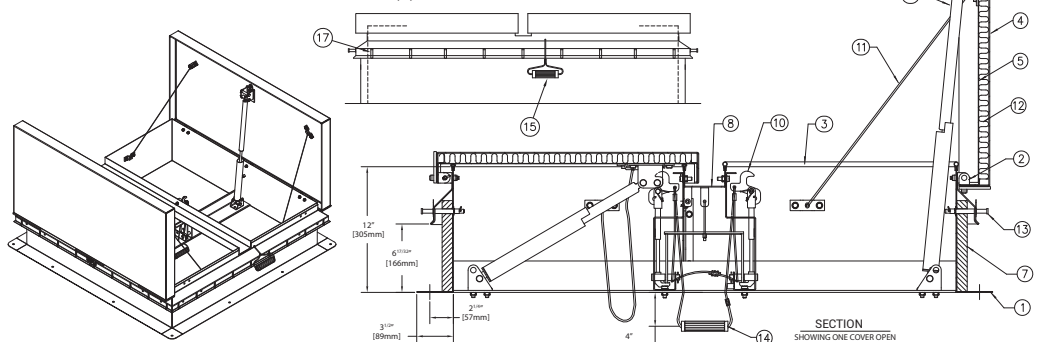

PROJECT DATA

Custom Sizes Available - Fast!

Scan  or  Click



BEST
ACCESS
DOORS

To view Pricing and
Additional Product Info.

PROJECT NAME :	QTY	W	H	OPTIONS
ARCHITECT :				
DEALER :				
CONTRACTOR :				
LOCATION :	SPECIAL INSTRUCTIONS :			
DATE :	SUBMITTAL APPROVAL : (signature or stamp)			
TAGGING INSTRUCTIONS :				

TELEPHONE:
1-800-483-0823
FAX:
1-888-828-6021



385 WILSON STREET EAST,
SUITE 302
ANCASTER, ON, L9G 2C1
CANADA

WEBSITE:
www.BestAccessDoors.ca
E-MAIL:
info@bestaccessdoors.ca




BAC-DSH

GALV. STEEL AUTOMATIC DOUBLE LEAF SMOKE VENT

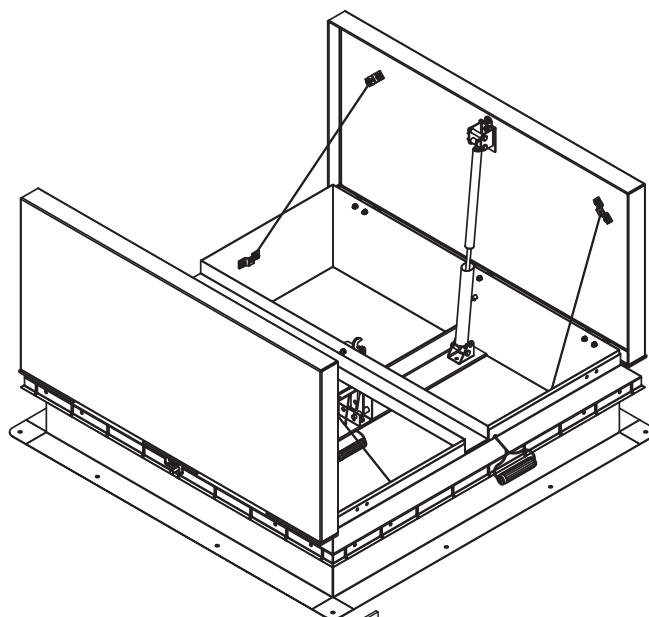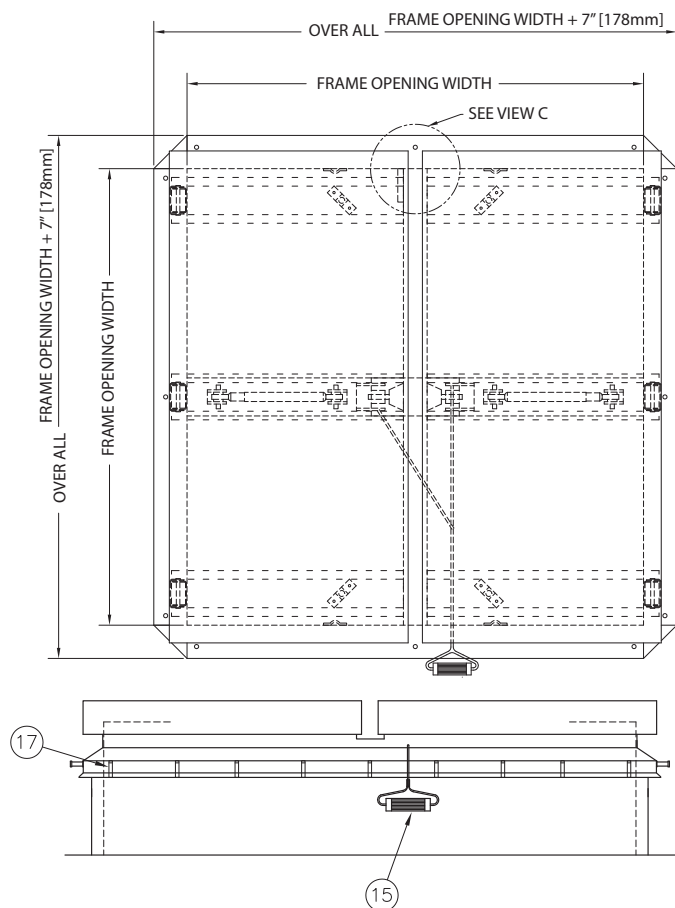

THERMOLATCH® II
CURB - MOUNTED RESET

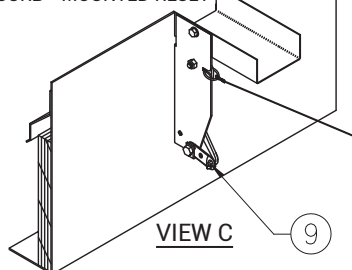

NOTE:

1. COVERS SHALL OPEN AGAINST 10 PSF (49KG/M²) SNOW/WIND LOAD
2. VENT ASSEMBLY RATED FOR 40 PSF (195KG/M²) LIVE LOAD
3. COVERS WILL REMAIN CLOSED UNDER 90 PSF (438KG/M²) WIND UPLIFT FORCE

1. THERMOLATCH MECHANISM - COVERS WILL OPERATE ONLY WHEN ACTIVATED
 - A. MANUALLY
 - B. BY HEAT AT 1650 FUSIBLE LINK
2. MANUFACTURER TO PROVIDE LABEL WITH INSTRUCTIONS TO RESET LATCH ON INTERIOR OF FRAME

