



Quality Access Doors- FAST!

SUBMITTAL/TECHNICAL DATA SHEET

APPLICATION

- Designed for 1/2" and 5/8" thick dry wall
- Suitable for both wall and ceiling installation
- Screws on to the face of your drywall
- Once finished seaming over the flange, the product is ready to be primed and painted to your wall colour
- The inserts comes primed white and ready for your paint colour


FEATURES

- Magnetic removable triple fibereinforcedcement board grill.
- 24 gauge galvanized satin coat steel frame complete with a beaded edge and adjustable diffuser
- 4 rare earth magnets (0.250"di metre x 0.060" thick)
- Easy installation, primed and ready to paint
- 20 degree angled slots for directional venting and to hide a fan
- Fire Rated, non-flammable
- Impact Resistant
- Moisture and Water resistant, Mold resistant
- Eco- Friendly Manufacturing and
- Non-Hazardous

SPECIFICATIONS

- Over 14.36 square inches (92.64 square centimeters) of open area
- Slot Size: 5.613" x 0.32 (142.5mm x 8.12mm)
- 8 angled horizontal slots
- Overall dimensions are 10.125" x 10.125" x 0.5" (257.17mm x 257.17mm x 12mm).
- Product weight is 1.2 pounds (0.54 kilograms)

For a complete list of options visit www.BestAccessDoors.ca

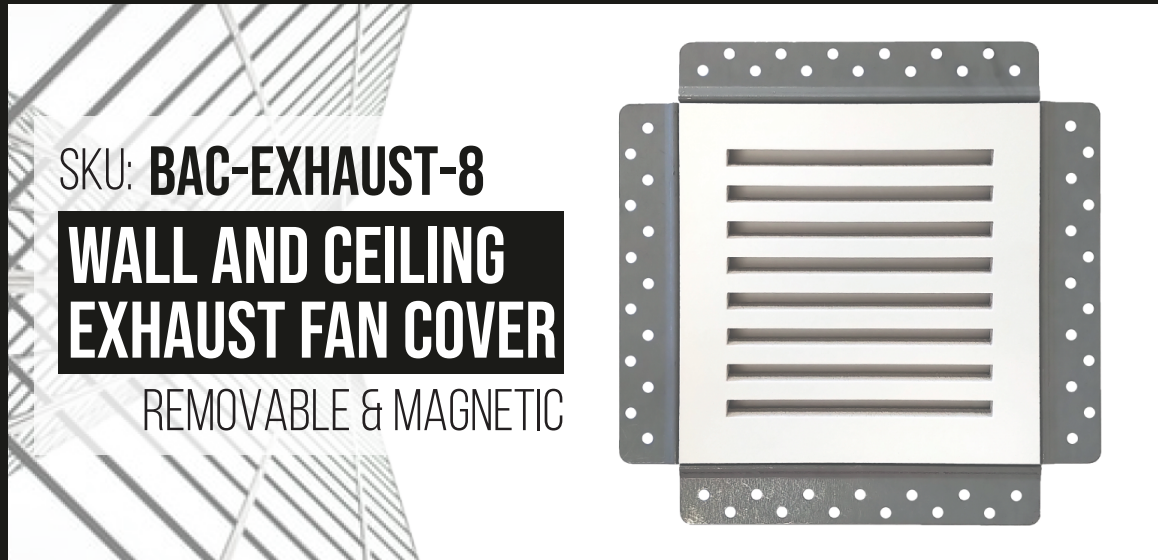


SKU: **BAG-EXHAUST-8**

WALL AND CEILING EXHAUST FAN COVER

REMOVABLE & MAGNETIC

DIMENSIONS AND APPEARANCE

>> [CLICK TO VIEW ADDITIONAL DETAILS AND PRICING <<](#)

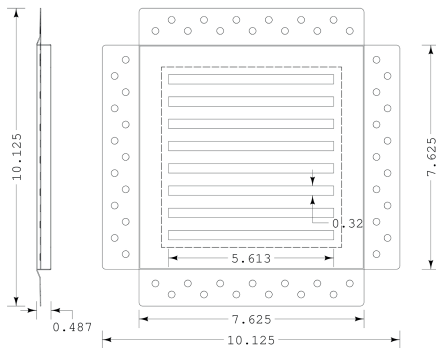


A premium flush mount exhaust fan cover for a 8"x8" drywall opening. This cover can also be used as a cold air return, and yields a 6.125"x6.125" accessible area.

(NOTE: your exhaust fan and/or motor needs to fit through this area).

MATERIAL SPECIFICATIONS:

- Raw Material - Magnesium sulphate cement, plant fibre, glass fibre cloth, perlite
- Density - 0.95 g/cm3
- Water Content - 12%
- Chloride Ion Content - 0%
- Formaldehyde Release - 0%
- Asbestos Content - 0%
- Fire resistance - Incombustibility A1 Class (GB 8624-2006/EN13501-1)
- Water Absorption - 27%
- Resistant Bending Strength - 8 MPa
- Impact Resistance - 1.5 J/m
- Nail-Withdrawal strength - 16 N/mm
- Water Permeability - No water vapour after 24 hours' test
- Refractoriness (Pyrometric cone Test) - 4H
- pH Value - 6.7(8.0)
- Thermal conductivity - 0.2 W/(mK)
- Moisture Movement - 0.25 %
- Heat Shrinkage Rate - 0.05
- Freeze Thaw - No distortion after 25 repeated cycles of freezing and thawing.

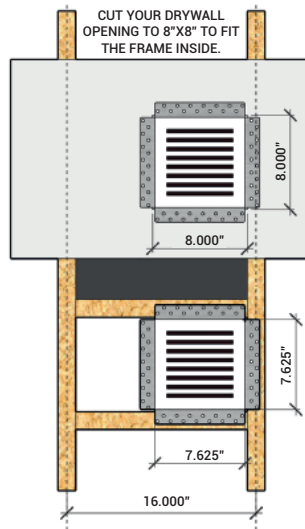

PROJECT DATA

Custom Sizes Available - Fast!

Scan or Click



To view Pricing and Additional Product Info.

| | | | | |
|------------------------|--|---|---|---------|
| PROJECT NAME : | QTY | W | H | OPTIONS |
| ARCHITECT : | | | | |
| DEALER : | | | | |
| CONTRACTOR : | | | | |
| LOCATION : | SPECIAL INSTRUCTIONS : | | | |
| DATE : | | | | |
| TAGGING INSTRUCTIONS : | SUBMITTAL APPROVAL : (signature or stamp) | | | |

TELEPHONE:
1-800-483-0823

FAX:
1-888-828-6021

385 WILSON STREET EAST,
SUITE 302
ANCASTER, ON, L9G 2C1
CANADA



WEBSITE:
www.BestAccessDoors.ca

E-MAIL:
info@bestaccessdoors.ca