

# **DESCRIPTION**

The access panel consists of a welded aluminum frame and is available with 1/2" (12.7 mm) or 5/8" (15.9 mm) inlayed drywall and two latches.

Both an outer and an inner frame aluminum which is bonded with a

equipped with a safety-system to prevent accidental opening. This safety system must be reattached if the hatch is removed.

The panel is designed for acoustic ceilinas.

# **ADVANTAGES**

- Fast delivery
- Quick and easy installation
- · Solid aluminum frame
- · Flush installation in ceilings and walls

www.BestAccessDoors.ca

assembly consists of high grade special welding process.

For sizes 12" x 12" (305 mm x 305 mm) and up the access panels are  $\frac{1}{2}$ 

The reveal of 1/16 of an inch (1.59 mm) is visible between the outer frame and door hatch. The concealed snap locks open the access panel when pressure is applied to spring loaded latch side.

- Superior engineering & innovative design

For a complete list of options visit

Scan or () Click




SKU: BAC-F2-AT

# FRAME FOR ACOUSTIC TILE FIXED HINGE DRYWALL PANEL



# **DIMENSIONS AND APPEARANCE**

>> CLICK TO VIEW ADDITIONAL DETAILS AND PRICING <<

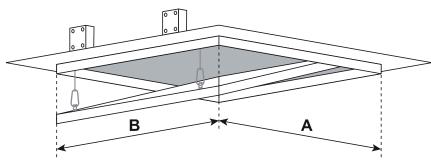

All standard sizes are available in 1/2" (12.7 mm) or 5/8" (15.9 mm) drywall.

Customized sizes can be produced in every dimension upon request.

This product includes the FRAME ONLY.

### OPTIONS:

	SD - Screwdriver operated cam latch					
	FS - Screwdriver operated four-square cam latch					
Z - Round Cylinder Lock with Key						
M - Mortise Cylinder Lock Preparation						
	H - Hex Head Cam Latch					
	P - Pinned Hex Head Cam Latch					

# ■ PROJECT DATA

## **Custom Sizes Available - Fast!**

PROJECT NAME :	QTY	w	Н	OPTIONS
ARCHITECT:				
DEALER:				
CONTRACTOR:				
LOCATION:	SPECIAL INSTRUCTIONS:			
DATE:				
TAGGING INSTRUCTIONS:	SUBMITTAL APPROVAL : (signature or stamp)			



To view Pricing and Additional Product Info.





385 WILSON STREET EAST, **SUITE 302** ANCASTER, ON, L9G 2C1 **CANADA** 



WEBSITE: www.BestAccessDoors.ca