



Quality Access Doors- FAST!

# SUBMITTAL/TECHNICAL DATA SHEET

## APPLICATION

- For installation in drywall walls requiring concealing of the door panel consistent to surroundings
- For use in walls, fire-rated for up to 90-minutes with a temperature rise of max 250°C (450°F) over 30 minutes

## FEATURES

- Recessed reinforced door fitted with 5/8" Fire-rated drywall.
- Concealed hinge & self-centering device ensures seamless appearance in walls
- Self-closing & self-latching door mechanism
- Perforated Frame ensures trouble-free application of skim coat to edge of the door
- Zinc coated steel provides superior corrosion resistance
- Testing standards UL 10(b) and ULC S104

## SPECIFICATIONS

**DOOR:** Steel-22 Gauge recessed fitted with 5/8" thick drywall suitable to accept skim coat finish on site.

**DOOR FRAME:** Steel-22 Gauge press bent for strength and rigidity with pre-punched flanges for convenient mounting and accepting skim coat finish on site

**HINGE:** Concealed

**FIRE RATING (WALLS):** Meets 1 1/2 hour fire rating requirement in accordance with UL 10(b) and CAN/ULC S104-10 for max size upto 24" x 36"

**LATCH:** Self-latching bolt, operated by flush key

**FINISH:** Satin coat steel

SKU: **BAG-FW-5015**

## FIRE RATED ACCESS DOOR

RECESSED FOR DRYWALL WALLS



"1 Latch"

"2 Latches"


## DIMENSIONS AND APPEARANCE

>> CLICK TO VIEW ADDITIONAL DETAILS AND PRICING <<


DOOR SIZE W x H INCHES (MM)	LATCHES	WEIGHT	
		LBS	KG
12 x 12 (305 x 305)	1	10.0	4.50
16 x 16 (406 x 406)	1	14.0	6.40
18 x 18 (457 x 457)	1	18.0	8.20
24 x 24 (610 x 610)	2	29.0	13.1
26 x 36 (610 x 914)	2	42.0	19.0

Wall opening is W + 3/8" ( 9 mm)

For detailed specifications see submittal sheet

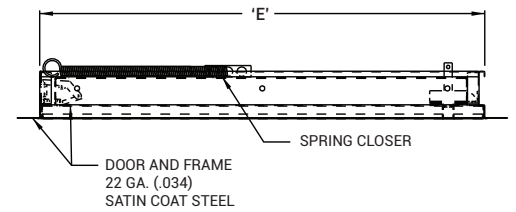


MANUFACTURED BY ACUDOR

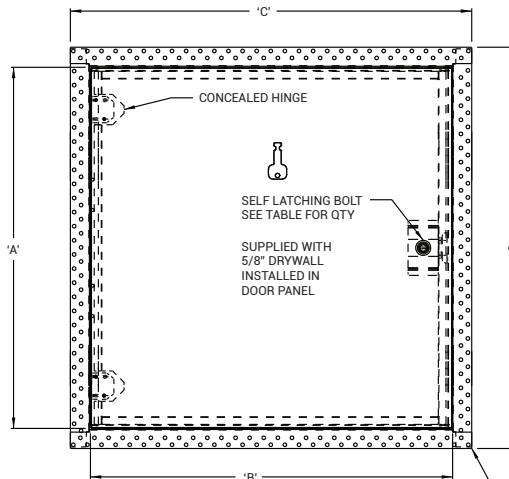

**VERTICAL WALLS**  
FOR USE IN VERTICAL WALLS  
FIRE RATED FOR UP TO 90  
MINUTES WITH TEMPERATURE  
RISE RATING OF MAXIMUM  
250° C (450° F) OVER 30  
MINUTES. CONFORMS TO:  
UL10(B) CERTIFIED TO:  
CAN/ULC S104 THIS DOOR HAS  
BEEN APPROVED BY WARNOCK  
HERSEY INTERNATIONAL (MAX.  
SIZE 24" X 36")

PATENT PENDING

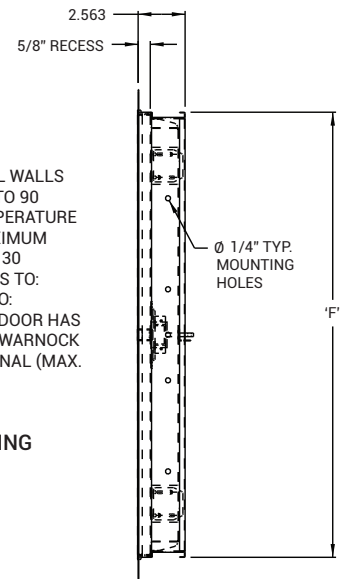

FLANGE FRAME PERFORATED

For a complete list of options visit [www.BestAccessDoors.ca](http://www.BestAccessDoors.ca)

## PROJECT DATA

Custom Sizes Available - Fast!

PROJECT NAME :	QTY	W	H	OPTIONS
ARCHITECT :				
DEALER :				
CONTRACTOR :				
LOCATION :	SPECIAL INSTRUCTIONS :			
DATE :				
TAGGING INSTRUCTIONS :	SUBMITTAL APPROVAL : (signature or stamp)			

TELEPHONE:  
1-800-483-0823

FAX:  
1-888-828-6021

385 WILSON STREET EAST,  
SUITE 302  
ANCASTER, ON, L9G 2C1  
CANADA



WEBSITE:  
[www.BestAccessDoors.ca](http://www.BestAccessDoors.ca)

E-MAIL:  
[info@bestaccessdoors.ca](mailto:info@bestaccessdoors.ca)

Scan or Click




To view Pricing and Additional Product Info.

# BAC-FW-5015

# RECESSED FOR DRYWALL

NOMINAL DOOR SIZE	A	B	C	D	E	F	LOCK
Inches (mm)							
12 x 12 (305 x 305)	11.83 (300)	11.89 (302)	14.48 (368)	14.48 (368)	12.04 (306)	12.04 (306)	1
14 x 14 (356 x 356)	13.83 (351)	13.89 (353)	16.48 (419)	16.48 (419)	14.04 (357)	14.04 (357)	1
16 x 16 (406 x 406)	15.83 (402)	15.89 (404)	18.48 (469)	18.48 (469)	16.04 (407)	16.04 (407)	1
18 x 18 (457 x 457)	17.83 (453)	17.89 (454)	20.48 (520)	20.48 (520)	18.04 (458)	18.04 (458)	1
24 x 24 (610 x 610)	23.83 (605)	23.89 (607)	26.48 (673)	26.48 (673)	24.04 (611)	24.04 (611)	2
24 x 36 (610 x 914)	35.83 (910)	23.89 (607)	26.48 (673)	38.48 (977)	24.04 (611)	36.04 (915)	2

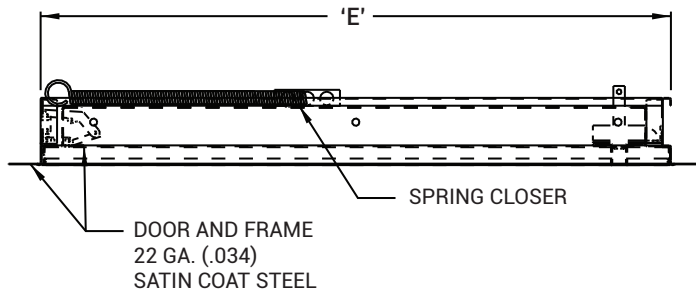

**VERTICAL WALLS**

FOR USE IN VERTICAL WALLS FIRE RATED FOR UP TO 90 MINUTES WITH TEMPERATURE RISE RATING OF MAXIMUM 250° C (450° F) OVER 30 MINUTES. CONFORMS TO: UL10(B) CERTIFIED TO: CAN/ULC S104 THIS DOOR HAS BEEN APPROVED BY WARNOCK HERSEY INTERNATIONAL (MAX. SIZE 24" x 36")

