



Quality Access Doors - FAST!

## DESCRIPTION

The premium flush mounted vent and grille cover is an innovative flush access door for walls and ceilings. It is designed for installation in drywall, plaster, masonry, tile or any flush surface.

The door panel has a machined outer edge to allow for screws, tape, and drywall compound. It can be easily installed, and comes in prime coated white.

Not only that this panel is fire rated thus making it non-flammable, but it is also impact, moisture, water, and mold resistant!

This product is not only eco-friendly manufactured, but it also non-hazardous with triple fiber reinforced cement board.

## APPLICATION

- Designed for ½" thick drywall for a permanent installation.
- Low and high wall installations.

## FEATURES

- Triple Fibre Reinforced Cement Board.
- Easy Installation, primed and ready for paint.
- Machined outer edge to allow for screws, tape and drywall compound.
- 20 degree angled vent slots for directional venting.
- Fire Rated, Non-Flammable.
- Impact Resistant.
- Moisture and Water Resistant, Mold Resistant.
- Eco- Friendly Manufacturing and Non-Hazardous.

## SPECIFICATIONS

- Over 41 square inches (265 Square CM) of open area.
- Slot Size - .32" x 5.8" (8mm x 147mm)
- 22 Slots total
- Slot Angle - 20 degrees
- Overall dimensions ½" x 16" x 113/s" (12mm x 406mm x 287mm)

For a complete list of options visit  
[www.BestAccessDoors.ca](http://www.BestAccessDoors.ca)

# SUBMITTAL/TECHNICAL DATA SHEET

SKU: **BAC-IG-C14**




## PREMIUM FLUSH MOUNTED VENT & GRILLE COVERS

PERMANENT COLD AIR RETURN



## DIMENSIONS AND APPEARANCE

>> CLICK TO VIEW ADDITIONAL DETAILS AND PRICING <<

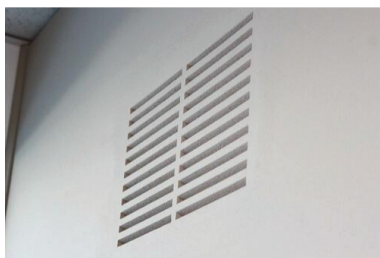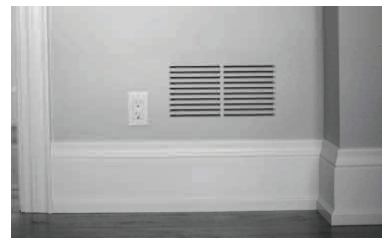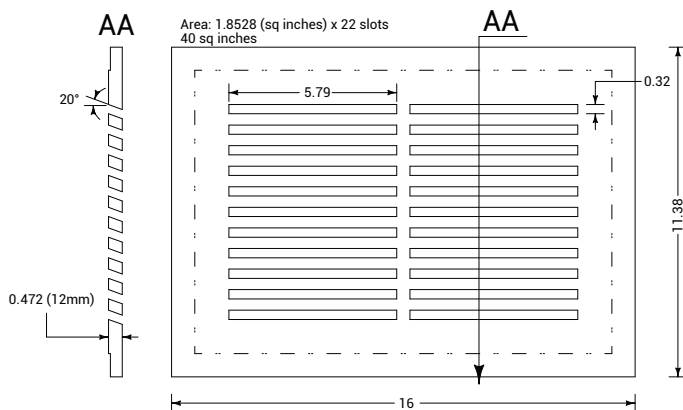



### Material Information:

Raw Material - Magnesium sulphate cement, plant fibre, glass fibre cloth, perlite  
Density - 0.95 g/cubic cm  
Water Content - 12%  
Chloridelon Content - 0%  
Formaldehyde Release - 0%  
Asbestos Content - 0%  
Fire resistance: Incombustibility A1 Class(GB8624-2006/EN13501-1)  
Water Absorption - 27%  
Resistant Bending Strength - 8 MPa  
Impact Resistance - 1.5 J/m  
Nail - Withdrawal strength - 16 N/mm  
Water Permeability - No water vapour after 24hour's test  
Refractoriness (Pyrometriccone Test) - 4H  
pH Value - 6.7{8.0}  
Thermal conductivity - 0.2 W/(mK)  
Moisture Movement - 0.25 %  
Heat Shrinkage Rate - 0.05  
Freeze Thaw - No distortion after 25 repeated cycles of freezing and thawing.

## PROJECT DATA

Custom Sizes Available - Fast!

PROJECT NAME :	QTY	W	H	OPTIONS
ARCHITECT :				
DEALER :				
CONTRACTOR :				
LOCATION :	SPECIAL INSTRUCTIONS :			
DATE :	SUBMITTAL APPROVAL : (signature or stamp)			
TAGGING INSTRUCTIONS :				

Scan  or  Click



To view Pricing and  
Additional Product Info.

TELEPHONE:  
1-800-483-0823  
FAX:  
1-888-828-6021



385 WILSON STREET EAST,  
SUITE 302  
ANCASTER, ON, L9G 2C1  
CANADA



WEBSITE:  
[www.BestAccessDoors.ca](http://www.BestAccessDoors.ca)  
E-MAIL:  
[info@bestaccessdoors.ca](mailto:info@bestaccessdoors.ca)