



Quality Access Doors- FAST!

# SUBMITTAL/TECHNICAL DATA SHEET

SKU: **BAG-IG-MAG1**

## PREMIUM FLUSH MOUNTED VENT & GRILLE COVERS

REMOVABLE COLD AIR RETURN



### DESCRIPTION

The premium flush mounted vent and grille cover is an innovative flush access door for walls and ceilings. It is designed for installation in drywall, plaster, masonry, tile or any flush surface.

The door panel features a magnetic removable grille door which provides an architecturally pleasing appearance and provides easy access. It can be easily installed, and comes in prime coated white.

Not only that this panel is fire rated thus making it non-flammable, but it is also impact, moisture, water, and mold resistant!

This product is not only eco-friendly manufactured, but it also non-hazardous with triple fiber reinforced cement board.

### APPLICATION

- Designed for 1/2" & 5/8" thick drywall installations.
- Low and high wall installations.

### FEATURES


- Removable Triple Fibre Reinforced Concrete Board Grille.
- 24 gauge galvanized satin coat steel frame
- 4 Rare Earth Magnets - .250" Diameter x .060" Thick
- Easy Installation, primed and ready for paint.
- 20 degree angled vent slots for directional venting.
- Fire Rated, Non-Flammable.
- Impact Resistant.
- Moisture and Water Resistant, Mold Resistant.
- Eco-Friendly Manufacturing and Non-Hazardous.

### SPECIFICATIONS

- Slot Size - .32" X 5.7" (8.1mm X 145mm)
- 26 Slots angled at 20 degrees
- Overall dimensions 1/2" x 16" X 13" (13mm x 406.5mm x 330mm)

### DIMENSIONS AND APPEARANCE

>> CLICK TO VIEW ADDITIONAL DETAILS AND PRICING <<

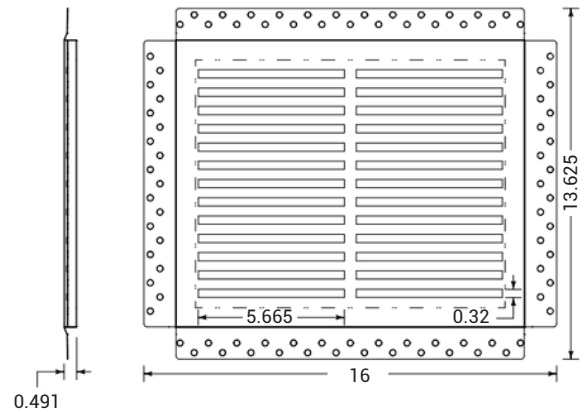

#### Material Information:

Raw Material - Magnesium sulphate cement, plant fibre, glass fibre cloth, perlite  
 Density - 0.95 g/cm  
 Water Content - 12%  
 Chloride Ion Content - 0%  
 Formaldehyde Release - 0%  
 Asbestos Content - 0%  
 Fire resistance - Incombustibility A1 Class (GB 8624-2006/EN 13501-1)  
 Water Absorption - 27%  
 Resistant Bending Strength - 8 MPa  
 Impact Resistance - 1.5 J/m  
 Nail-Withdrawal strength - 16 N/mm  
 Water Permeability - No water vapour after 24 hour's test  
 Refractoriness (Pyrometric cone Test) - 4H  
 pH Value - 6.7(8.0)  
 Thermal conductivity - 0.2 W/(mK)  
 Moisture Movement - 0.25 %  
 Heat Shrinkage Rate - 0.05  
 Freeze Thaw - No distortion after 25 repeated cycles of freezing and thawing.

For a complete list of options visit [www.BestAccessDoors.ca](http://www.BestAccessDoors.ca)

### PROJECT DATA

Custom Sizes Available - Fast!

Scan or Click



To view Pricing and Additional Product Info.

PROJECT NAME :	QTY	W	H	OPTIONS
ARCHITECT :				
DEALER :				
CONTRACTOR :				
LOCATION :	SPECIAL INSTRUCTIONS :			
DATE :	SUBMITTAL APPROVAL : (signature or stamp)			
TAGGING INSTRUCTIONS :				

TELEPHONE:  
1-800-483-0823

FAX:  
1-888-828-6021



385 WILSON STREET EAST,  
SUITE 302  
ANCASTER, ON, L9G 2C1  
CANADA



WEBSITE:  
[www.BestAccessDoors.ca](http://www.BestAccessDoors.ca)

E-MAIL:  
[info@bestaccessdoors.ca](mailto:info@bestaccessdoors.ca)