



Quality Access Doors- FAST!

SUBMITTAL/TECHNICAL DATA SHEET

SPECIFICATIONS

01. Frame w/ flashing (corners full welded)
 - L-20 - 14 gauge P.B. Galv. Steel
 - L-40 - 14 gauge P.B. Galv. Steel
 - L-50 - 11 gauge aluminum
02. Pintle hinge
03. Gasket (all around cover)
04. Cover gauge
 - L-20 - 14 gauge P.B. Galv. Steel
 - L-40 - 11 gauge aluminum
 - L-50 - 11 gauge aluminum
05. Cover liner
 - L-20 - 22 gauge P.B. Galv. Steel
 - L-40 - 18 gauge aluminum
 - L-50 - 18 gauge aluminum
06. Spring lifting mechanism
07. 1" rigid fiberboard insulation
08. Slam latch (2 Point)
09. Inside and outside handles w/ padlock hasps
10. Arm guide bracket
11. 1" thick fiberglass cover insulation
12. Hold open arm w/ red vinyl grip
13. Neoprene gasket
14. Lock strike
15. Bilclip® flashing system
16. Guide arm (if req'd)

SHOP FINISH:

STEEL: Red oxide primer

ALUMINUM: Mill finish

HARDWARE: Non-corrosive materials
(Unless otherwise specified)

This product may be installed on either a flat or sloping roof. When installed on a slope, the hinge side must run parallel with the slope. If slope exceeds 30°, advise factory for modification

For a complete list of options visit
www.BestAccessDoors.ca

QTY	TYPE	SIZE (INCHES) WIDTH X LENGTH	METAL
☐	L-20	2'-6" X 8'-0"	STEEL COVER OR STEEL FRAME
☐	L-40	2'-6" X 8'-0"	ALUM. COVER OR STEEL FRAME
☐	L-50	2'-6" X 8'-0"	ALUM. COVER OR ALUM. FRAME

SKU: **BAG-L-50**


SINGLE LEAF ROOF SCUTTLE

TYPE L



DIMENSIONS AND APPEARANCE

>> CLICK TO VIEW ADDITIONAL DETAILS AND PRICING <<

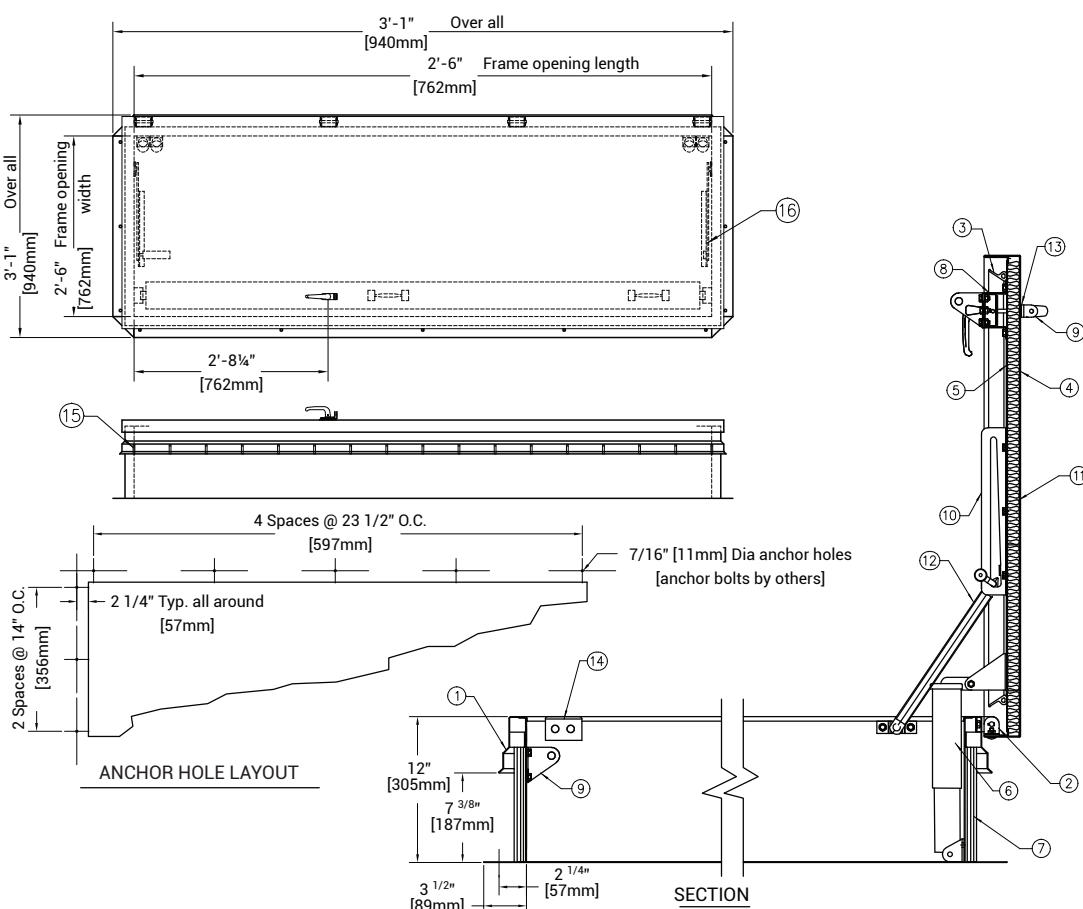

PROJECT DATA

Custom Sizes Available - Fast!

Scan  or  Click



To view Pricing and
Additional Product Info.

PROJECT NAME :	QTY	W	H	OPTIONS
ARCHITECT :				
DEALER :				
CONTRACTOR :				
LOCATION :	SPECIAL INSTRUCTIONS :			
DATE :				
TAGGING INSTRUCTIONS :	SUBMITTAL APPROVAL : (signature or stamp)			

TELEPHONE:
1-800-483-0823
FAX:
1-888-828-6021

385 WILSON STREET EAST,
SUITE 302
ANCASTER, ON, L9G 2C1
CANADA



WEBSITE:
www.BestAccessDoors.ca
E-MAIL:
info@bestaccessdoors.ca