

### **SPECIFICATIONS**

- 01. Heavy duty forged brass hinges with stainless steel pins
- 02. Guide arm (If req'd)
- 1-1/2" drain coupling
- Λ4 Standard slam lock
- 05. Cam assembly 06. Automatic hold open arm w/ red vinyl grip
- 07. 1/4" Aluminum diamond pattern plate
- 08. 1/4" Aluminum channel frame with extruded anchor flange
- 09. Stainless steel lock strike
- 10. Torsion rods (stainless steel)

#### SHOP FINISH:

ALUMINUM: Mill finish HARDWARE: Zinc plated & chromate sealed (Unless other

Reinforced for 300 Lbs. Per Sq. Ft. (1464 KG. Per Sq. Meter) live load

### **INSTALLER NOTES:**

A. Use caution. Cover is spring loaded. Do not remove safety shipping bolt until unit is to be installed and in normal horizontal operating position.

- B. Be sure unit is set on slight pitch toward drain corner.
- C. Before anchoring in place open and close door. Check to see that the door in the closed position rests on the frame all around. If not, shim under the frame at the proper corner.
- D. Do not reduce 1 1/2" drain pipe to dry well or disposal system.

For a complete list of options visit www.BestAccessDoors.ca

# SUBMITTAL/TECHNICAL DATA SHEET


SKU: BAC-PCM

# ALUM. PRECAST VAULT Drainage floor door




# ■ DIMENSIONS AND APPEARANCE

>> CLICK TO VIEW ADDITIONAL DETAILS AND PRICING <<

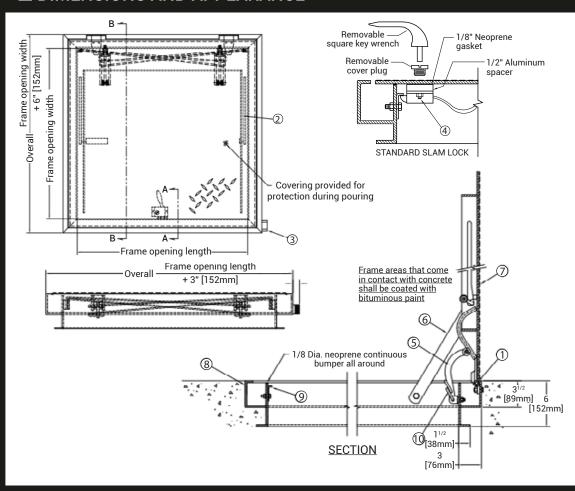

## PROJECT DATA

### **Custom Sizes Available - Fast!**

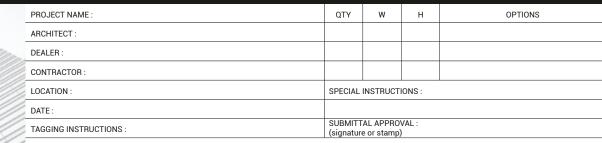





To view Pricing and Additional Product Info.



TELEPHONE: 1-800-483-0823 1-888-828-6021



385 WILSON STREET EAST, **SUITE 302** ANCASTER, ON, L9G 2C1 **CANADA** 



WEBSITE: www.BestAccessDoors.ca

E-MAIL: info@bestaccessdoors.ca