



Quality Access Doors- FAST!

## STANDARD OPTIONS

### MATERIAL:

16 gauge cold rolled steel

### HINGE:

Continuous piano hinge

### LOCK / LATCH:

Self latching tool-key operated latch and/or ring operated latch, both included

### GYP:

Drywall corner beads flange

### INSIDE PANEL RELEASE:

Standard on all doors over 12" x 12"

### AUTOMATIC PANEL CLOSER:

Standard on all doors

### FINISH:

High quality white powder coat primer

### PACKAGING:

Individually wrapped, 1 per box

## OPTIONS AVAILABLE

### LOCK / LATCH:

- Key operated cylinder cam latch
- Mortise deadbolt lock
- Hex head slam latch
- Handle operated slam latch
- Mortise preparation for cylinder (Cylinder optional)

### MATERIAL:



Stainless steel #4 (brushed finish)

### MASONRY ANCHOR:

Available on all sizes

Fire Rating information on Page 2

For a complete list of options visit  
[www.BestAccessDoors.ca](http://www.BestAccessDoors.ca)

Scan  or  Click



To view Pricing and  
Additional Product Info.

LEED READY: THIS PRODUCT  
CONTRIBUTES TO LEED® CREDITS



# SUBMITTAL/TECHNICAL DATA SHEET

SKU: **BAG-PFN-GYP**


## FIRE RATED UNINSULATED ACCESS DOOR

WITH DRYWALL FLANGE



## ■ INSTALLATION

>> CLICK TO VIEW ADDITIONAL DETAILS AND PRICING <<

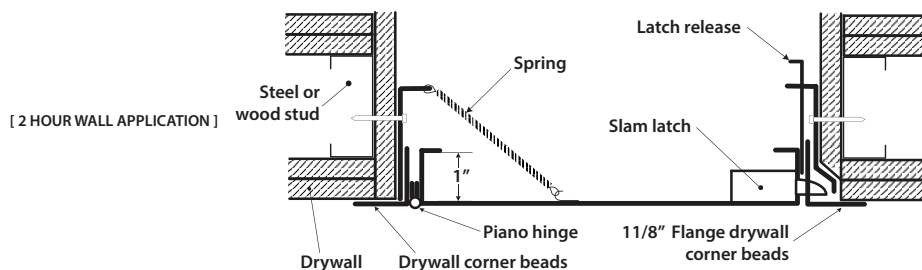


Authorities Having Jurisdiction (AHJ) should be consulted in all cases as to the particular requirements covering the installation and use of fire rated access doors.

## ■ DIMENSIONS AND APPEARANCE

### STANDARD SIZES:

DOOR SIZE W x H inches (MM)	NUMBER OF LOCKS	WEIGHT LBS	KG
8 x 8 (203 x 203)	1	5	2.3
10 x 10 (254 x 254)	1	7	3.2
12 x 12 (304 x 304)	1	8	3.6
14 x 14 (355 x 355)	1	10	4.5
16 x 16 (406 x 406)	1	12	5.5
18 x 18 (457 x 457)	1	14	6.4
22 x 22 (558 x 558)	1	18	8.2
22 x 30 (558 x 762)	1	22	10
22 x 36 (558 x 914)	2	27	12.2
24 x 24 (609 x 609)	1	22	10
24 x 36 (609 x 914)	2	29	13.2
30 x 30 (762 x 762)	1	30	13.6
32 x 32 (812 x 812)	2	33	15
36 x 36 (914 x 914)	2	39	17.7

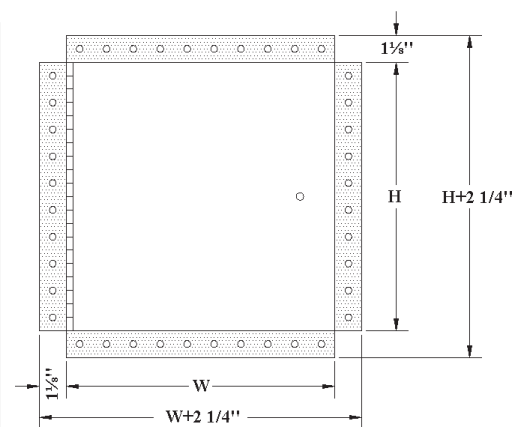

ROUGH WALL OPENING IS DOOR SIZE + 1/4" OR + 6MM

## ■ PROJECT DATA

Custom Sizes Available - Fast!

PROJECT NAME :	QTY	W	H	OPTIONS
ARCHITECT :				
DEALER :				
CONTRACTOR :				
LOCATION :	SPECIAL INSTRUCTIONS :			
DATE :				
TAGGING INSTRUCTIONS :	SUBMITTAL APPROVAL : (signature or stamp)			

TELEPHONE:  
1-800-483-0823  
FAX:  
1-888-828-6021

385 WILSON STREET EAST,  
SUITE 302  
ANCASTER, ON, L9G 2C1  
CANADA

WEBSITE:  
[www.BestAccessDoors.ca](http://www.BestAccessDoors.ca)  
E-MAIL:  
[info@BestAccessDoors.ca](mailto:info@BestAccessDoors.ca)

## ■ FIRE RATING

### FOR VERTICAL WALL ASSEMBLIES ONLY:

CERTIFIED TO STANDARDS: UBC 7-2 (1997), UL 10B (1997), UL 10B (2009), NFPA 252 (2003), NFPA 252 (2008), NFPA 252 (2012), CAN/ULC S104 (R1985), CAN/ULC S104 (2010).

RATING ACHIEVED: 1-1/2 hours, neutral/negative pressure


MAXIMUM SIZE: 36" wide x 36" high (914 mm x 914 mm). Maximum area of 1296 in<sup>2</sup>.

Tolerance on height and width limitation is  $\pm 3"$  (76 mm) as long as the area does not exceed 1296 in<sup>2</sup>

TEMPERATURE RISE: No rating achieved.

## ■ INSTALLATION: WALLS AND CEILINGS

[ 2 HOUR WALL APPLICATION ]

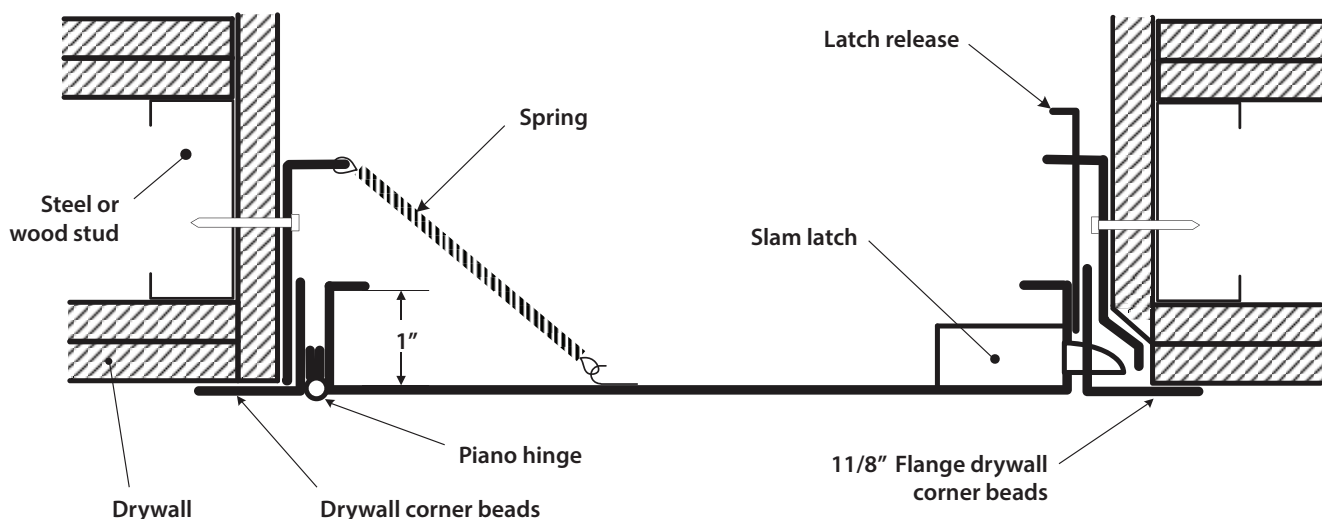

Authorities Having Jurisdiction (AHJ) should be consulted in all cases as to the particular requirements covering the installation and use of fire rated access doors.



TELEPHONE:  
1-800-483-0823  
FAX:  
1-888-828-6021



385 WILSON STREET EAST,  
SUITE 302  
ANCASTER, ON, L9G 2C1  
CANADA



WEBSITE:  
[www.BestAccessDoors.ca](http://www.BestAccessDoors.ca)  
E-MAIL:  
[info@BestAccessDoors.ca](mailto:info@BestAccessDoors.ca)