



Quality Access Doors- FAST!

SUBMITTAL/TECHNICAL DATA SHEET

STANDARD OPTIONS

MATERIAL:
 DOOR: Aluminum diamond plate 1/4"
 FRAME: 2" x 2" x 1/4" Aluminum angle

HINGE:
 Heavy duty aluminum continuous piano hinge (0.080")

LOCK / LATCH:
 Recessed handle operated cam latch

OPTIONS AVAILABLE

LOCK / LATCH:
 Key operated recessed handle cam latch


RECESS:
 Recessed floor hatch optional - see BAC-PPA-RE model

CAUTION:
 The BAC-PPA floor access door is designed to support a live load of 300 pounds/sq.foot and includes a hold open arm to keep the door in an open position

SKU: **BAC-PPA**


FLUSH ALUMINUM FLOOR HATCH

WITH EXPOSED FLANGE

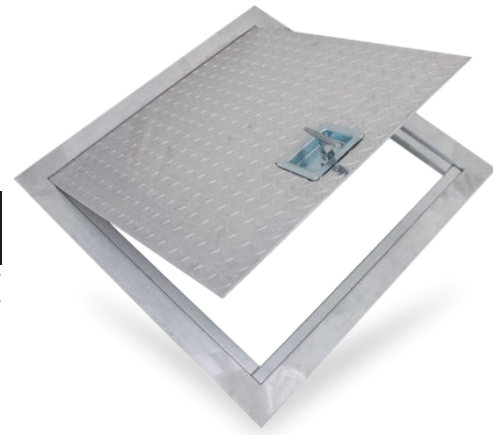

INSTALLATION

>> [CLICK TO VIEW ADDITIONAL DETAILS AND PRICING <<](#)

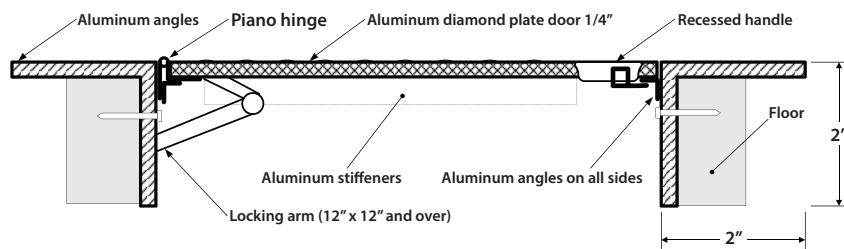

DIMENSIONS AND APPEARANCE


For a complete list of options visit www.BestAccessDoors.ca

Scan or Click



To view Pricing and Additional Product Info.

HATCH SIZE - W x H INCHES (MM)	NUMBER OF LOCKS	WEIGHT	
		LBS	KG
24 x 24 (609 x 609)	1	35	15.9
24 x 36 (609 x 914)	1	44	20
Rough floor opening is door size + 1/2" or + 13mm			

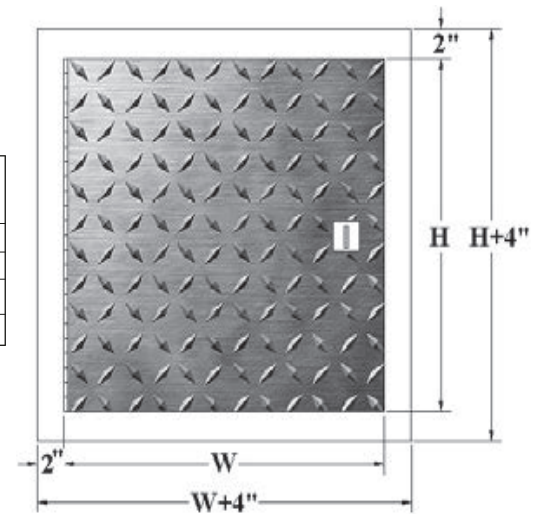

PROJECT DATA

Custom Sizes Available - Fast!

PROJECT NAME :	QTY	W	H	OPTIONS
ARCHITECT :				
DEALER :				
CONTRACTOR :				
LOCATION :	SPECIAL INSTRUCTIONS :			
DATE :	SUBMITTAL APPROVAL : (signature or stamp)			
TAGGING INSTRUCTIONS :				

LEED READY: THIS PRODUCT CONTRIBUTES TO LEED® CREDITS



TELEPHONE:
1-800-483-0823

FAX:
1-888-828-6021



385 WILSON STREET EAST,
SUITE 302
ANCASTER, ON, L9G 2C1
CANADA



WEBSITE:
www.BestAccessDoors.ca

E-MAIL:
info@bestaccessdoors.ca