

# **SPECIFICATIONS**

- 01. Extruded aluminum frame
- 02. 1/4" Aluminum smooth plate cover
- 03. Torsion/Cam operating mechanism
- 04. Standard slam lock
- 05. Removable square key wrench06. Automatic hold open arm with Red vinyl grip 07. 1/8" x 1" Steel anchor strap
- 08. Continuous neoprene cushion
- 09. Steel cast hinges
- 10. Guard chain
- 11. 1/4" x 1 1/4" Astragal.
- 11. Guide arm (If req'd)
- 12. Aluminum tile edging around frame and

### SHOP FINISH:

ALUMINUM: Mill finish HARDWARE: Non-corrosive materials (Unless otherwise specified)

Reinforced for 150 Lbs. Per Sq. Ft. (732 KG. Per Sq. Meter) live load

#### **INSTALLER NOTES:**

A. Use caution. Cover is spring loaded. Do not remove safety shipping bolt until unit is to be installed and in normal horizontal operating position.

B. Before anchoring in place open and close door. Check to see that the door in the closed position rests on the frame all around. If not, shim under the frame at the proper corner.

For a complete list of options visit www.BestAccessDoors.ca

QTY	TYPE	SIZE WIDTH X LENGTH
	TD-2	4'-0" X 4'-0" [1220mm] X [1220mm]
	TD-3	4'-0" X 6'-0" [1220mm] X [1830mm]
	TD-4	5'-0" X 5'-0" [1525mm] X [1525mm]

TILE SIZE: 1/8'

# Scan or () Click



To view Pricing and Additional Product Info.


# SUBMITTAL/TECHNICAL DATA SHEET

SKU: BAC-TD-2 DOUBLE LEAF ACCESS DOOR



## ■ DIMENSIONS AND APPEARANCE

>> CLICK TO VIEW ADDITIONAL DETAILS AND PRICING <<

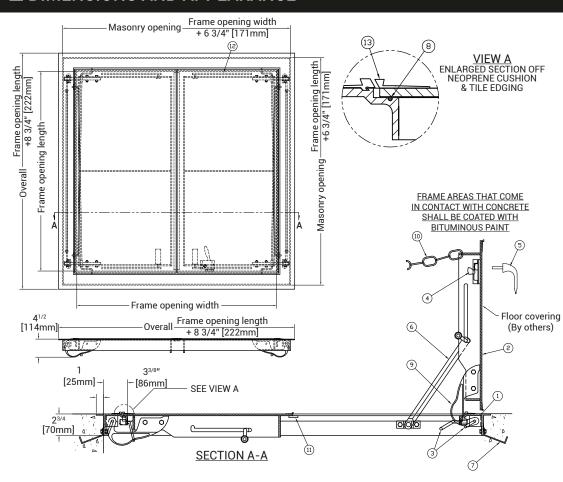

## PROJECT DATA

## **Custom Sizes Available - Fast!**

PROJECT NAME:	QTY	W	Н	OPTIONS
ARCHITECT:				
DEALER:				
CONTRACTOR:				
LOCATION:	SPECIAL INSTRUCTIONS:			
DATE:				
TAGGING INSTRUCTIONS:	SUBMITTAL APPROVAL : (signature or stamp)			



TELEPHONE: 1-800-483-0823 1-888-828-6021



385 WILSON STREET EAST, **SUITE 302** ANCASTER, ON, L9G 2C1 **CANADA** 



WEBSITE: www.BestAccessDoors.ca

E-MAIL: info@bestaccessdoors.ca