



Quality Access Doors- FAST!

STANDARD OPTIONS

COVER:

14 gauge galvalume steel with 1" fiberglass insulation

CURB:

14 gauge galvalume steel with 1" fiber board insulation

SEAL:

"D" - foam adhesive gasket provides a flush and tight fit

FINISH:

High quality white powder coat primer

COMPONENTS:

- 2 gas cylinders
- Retaining bar handles

OPTIONS AVAILABLE

MATERIAL:

Aluminum

SUBMITTAL/TECHNICAL DATA SHEET


SKU: **BAC-TRH**

ROOF HATCH



■ INSTALLATION


>> [CLICK TO VIEW ADDITIONAL DETAILS AND PRICING <<](#)

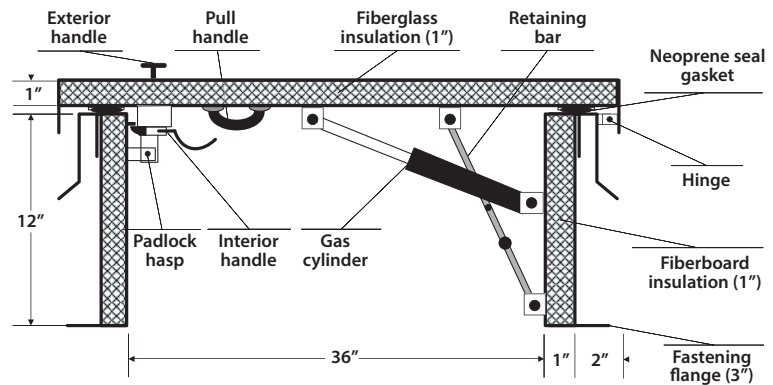

■ DIMENSIONS AND APPEARANCE

DOOR SIZE W x H INCHES (MM)	EXTERIOR SIZE W x H INCHES (MM)	NUMBER OF LOCKS	WEIGHT LBS	KG
36 x 30 (914 x 762)	42 x 36 (1067 x 614)	1	178	81
36 x 36 (914 x 914)	42 x 42 (1067 x 1067)	1	188	85

ROOF OPENING = SIZE OF ROOF HATCH

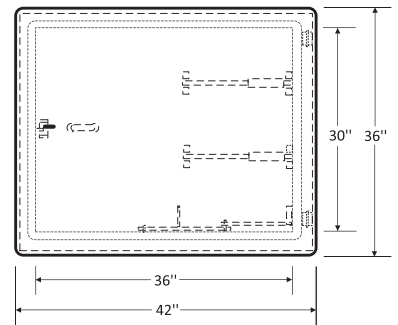

Scan  or  Click



**BEST
ACCESS
DOORS**

To view Pricing and
Additional Product Info.

**LEED READY: THIS PRODUCT
CONTRIBUTES TO LEED® CREDITS**

■ PROJECT DATA

Custom Sizes Available - Fast!

PROJECT NAME :	QTY	W	H	OPTIONS
ARCHITECT :				
DEALER :				
CONTRACTOR :				
LOCATION :	SPECIAL INSTRUCTIONS :			
DATE :				
TAGGING INSTRUCTIONS :	SUBMITTAL APPROVAL : (signature or stamp)			



TELEPHONE:
1-800-483-0823
FAX:
1-888-828-6021



385 WILSON STREET EAST,
SUITE 302
ANCASTER, ON, L9G 2C1
CANADA



WEBSITE:
www.BestAccessDoors.ca
E-MAIL:
info@bestaccessdoors.ca