

Quality Access Doors- FAST!

## **SPECIFICATION**

DOOR AND TRIM: 14. ga. steel. Door is recessed to accept up to 1" thick acoustical tile.

FRAME: 16 ga. steel.

HINGE: Continuous piano hinge opens 180°, will be placed on long side of door unless otherwise requested.

LATCHES: Flush, stainless steel cam operated with screwdriver. Latches are positioned opposite hinge as well as top and bottom on larger sizes.

FINISH: Baked white enamel over rust-inhibiting phosphate treated steel.

### **OPTIONS** (At additional cost)

• Key operated medium barrel cylinder lock (key code 151)

Each door comes complete with grommets.

For a complete list of options visit www.BestAccessDoors.ca

# SUBMITTAL/TECHNICAL DATA SHEET


# SKU: BAC-WB-AT METAL ACCESS DOOR

FOR ACCOUSTICAL TILE




# ■ DIMENSIONS AND APPEARANCE

>> CLICK TO VIEW ADDITIONAL DETAILS AND PRICING <<



#### STANDARD SIZES:

DOOR SIZE W X H	WALL OPENING	HINGES	CAM LATCH	SHIP WT. LBS.
12" X 12"	12¼" X 12¼"	1	1	8
12" X 24"	12¼" X 24¼"	1	2	13
18" X 18"	18¼" X 18¼"	1	3	15
24" X 24"	24¼" X 24¼"	1	3	26
24" X 36"	24¼" X 36¼"	1	4	33

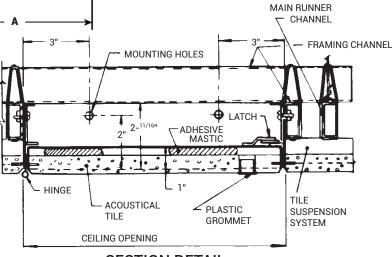

**SECTION DETAIL** 

# ■ PROJECT DATA

#### **Custom Sizes Available - Fast!**

	PROJECT NAME:	QTY	W	Н	OPTIONS		
	ARCHITECT:						
	DEALER:						
	CONTRACTOR:						
	LOCATION:	SPECIAL INSTRUCTIONS:					
	DATE:						
	TAGGING INSTRUCTIONS:	SUBMITTAL APPROVAL : (signature or stamp)					

To view Pricing and Additional Product Info.





385 WILSON STREET EAST, SUITE 302 ANCASTER, ON, L9G 2C1 CANADA



WEBSITE: www.BestAccessDoors.ca