



Quality Access Doors- FAST!

SUBMITTAL/TECHNICAL DATA SHEET

SKU: **BAC-WB-RDW**

METAL ACCESS DOOR

FOR DRYWALL SURFACES



SPECIFICATION

DOOR: 14 ga. steel. Door is recessed 1" to accept drywall.

BOX RETURN FRAME: 16 ga. steel. These models have a 1" wide perforated flange of 24 ga. Satin Coated galvanized steel for mounting purposes.

HINGE: Fully concealed pivot type hinge can be opened to 110°; will be placed on long side of door unless otherwise requested.

LATCHES: Flush, stainless steel cam operated with screwdriver. Latches are positioned opposite hinge as well as top and bottom on larger sizes.

FINISH: Electrostatically applied baked grey enamel over rust-inhibiting, phosphate treated steel.

OPTIONS (at additional cost)

- Key-operated medium barrel cylinder lock (key code 151)

FINISH:


- Stainless Steel Type 304 or 316

DIMENSIONS AND APPEARANCE

>> CLICK TO VIEW ADDITIONAL DETAILS AND PRICING <<


STANDARD SIZES:

DOOR SIZE W X H	WALL OPENING	HINGES	CAM LATCH	SHIP WT. LBS.
12" X 12"	12 1/4" X 12 1/4"	1	1	6
12" X 24"	12 1/4" X 24 1/4"	1	2	13
16" X 16"	16 1/4" X 16 1/4"	1	3	12
18" X 18"	18 1/4" X 18 1/4"	1	3	13
24" X 24"	24 1/4" X 24 1/4"	1	4	21
24" X 36"	24 1/4" X 36 1/4"	1	5	32

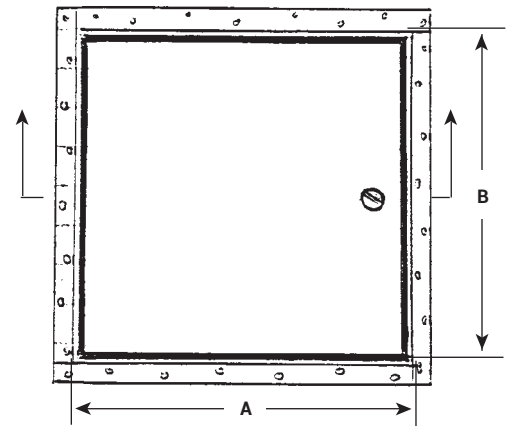

ELEVATION

EACH DOOR COMES COMPLETE WITH GROMMETS.

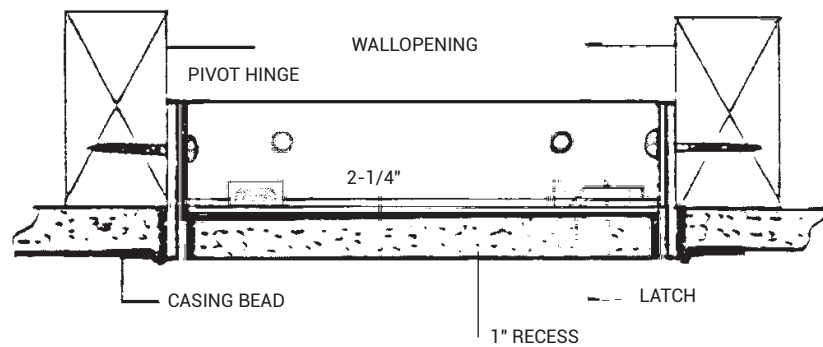

SECTION DETAIL

For a complete list of options visit www.BestAccessDoors.ca

PROJECT DATA

Custom Sizes Available - Fast!

PROJECT NAME :	QTY	W	H	OPTIONS
ARCHITECT :				
DEALER :				
CONTRACTOR :				
LOCATION :	SPECIAL INSTRUCTIONS :			
DATE :				
TAGGING INSTRUCTIONS :	SUBMITTAL APPROVAL : (signature or stamp)			

Scan or Click



To view Pricing and Additional Product Info.



TELEPHONE:
1-800-483-0823
FAX:
1-888-828-6021



385 WILSON STREET EAST,
SUITE 302
ANCASTER, ON, L9G 2C1
CANADA



WEBSITE:
www.BestAccessDoors.ca
E-MAIL:
info@bestaccessdoors.ca