



Quality Access Doors- FAST!

STANDARD OPTIONS

MATERIAL:

16 gauge cold rolled steel

HINGE:

Continuous piano hinge.

Note: Hinge on second dimension (Height)

LOCK / LATCH:

Allen hex head cam latch

RECESS:

5/8" Standard

FINISH:

High quality white powder coat primer

PACKAGING:

Individually wrapped, 1 per box

GYP:

Drywall corner beads flange

OPTIONS AVAILABLE

LATCH:

Key operated cylinder cam latch

MATERIAL:

Stainless steel 304 #4 (brushed finish)

RECESS:

1/2" to 3/4" (standard 2" frame)

13/16" to 1 1/2" (special 3" frame)

For a complete list of options visit
www.BestAccessDoors.ca

Scan  or  Click



To view Pricing and
Additional Product Info.

**LEED READY: THIS PRODUCT
CONTRIBUTES TO LEED® CREDITS**



SUBMITTAL/TECHNICAL DATA SHEET

SKU: **BAC-AHA-GYP**


RECESSED ACCESS DOOR

WITH DRYWALL FLANGE



■ INSTALLATION

>> [CLICK TO VIEW ADDITIONAL DETAILS AND PRICING <<](#)

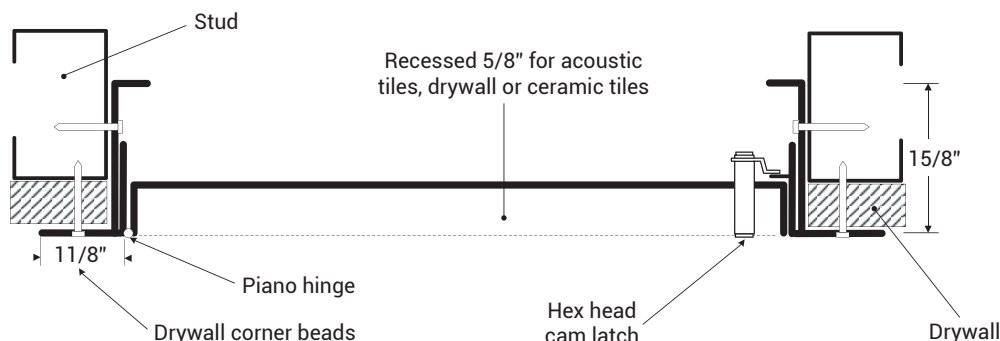


■ DIMENSIONS AND APPEARANCE

STANDARD SIZES:

DOOR SIZE W x H INCHES (MM)	NUMBER OF LOCKS	WEIGHT LBS	KG
8 x 8 (203 x 203)	1	3	1.4
12 x 12 (304 x 304)	1	5	2.3
16 x 16 (406 x 406)	1	9	4.1
18 x 18 (457 x 457)	1	11	5
24 x 24 (609 x 609)	1	16	7.3

Rough wall opening door size + 1/4" or +6mm

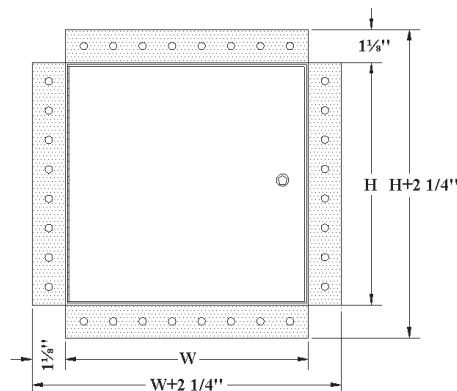

■ PROJECT DATA

Custom Sizes Available - Fast!

PROJECT NAME :	QTY	W	H	OPTIONS
ARCHITECT :				
DEALER :				
CONTRACTOR :				
LOCATION :	SPECIAL INSTRUCTIONS :			
DATE :				
TAGGING INSTRUCTIONS :	SUBMITTAL APPROVAL : (signature or stamp)			

TELEPHONE:
1-800-483-0823
FAX:
1-888-828-6021

385 WILSON STREET EAST,
SUITE 302
ANCASTER, ON, L9G 2C1
CANADA

WEBSITE:
www.BestAccessDoors.ca
E-MAIL:
info@bestaccessdoors.ca