



Quality Access Doors- FAST!

SUBMITTAL/TECHNICAL DATA SHEET

DESCRIPTION

Fire-rated architectural pan door is the industry's leading solution for seamless sight lines, long-lasting quality and fire rated safety.

FEATURES

- 2- or 3-hour fire-ratings tested to NFPA 288 (1/8" has 2- or 3-hour rating, 1" has 2-hour only)
- 1/8-Inch or 1-Inch pan sizes to receive a variety of flooring materials
- 1/8" pan in sizes up to 52" x 96"
- Lock options for added security
- Improved interior release handles
- Installs in wood or concrete applications

SPECIFICATIONS

SIZES 1/8" PAN:

- 250 psf 24"-48" W x 24"-60" L
- 150 psf >48"-52" W x >60"-96" L

SIZES 1" PAN:

- 250 psf 24"-48" W x 24"-48" L

DOOR: Single

COVER MATERIAL:

Aluminum: 1/4 inch smooth plate with 1/8-inch or 1-inch pan, Mill finish.

FRAME MATERIAL: Aluminum.

FIRE-RATING: 1/8" has 2- or 3-hour fire rating, 1" has 2-hour rating.

FRAME: Extruded Aluminum Angle.

INSTALLATION: Cast-In Standard or Bolt-In Optional.

SPRINGS: Enclosed coil, Type 17-7 Stainless Steel.

HINGE: Heavy-duty Type 316 Stainless Steel.

LATCH: Slam latch zinc-plated steel with inside lever handle.

CERTIFICATION: NFPA 288, Warnock Hersey label tested and listed by Intertek.


OPTIONS: Self-closing mechanism, recess padlock hasp, mortise prep.

WARRANTY: 5 year

For a complete list of options visit www.BestAccessDoors.ca

SKU: **BAC-BFDF-P1-BI**

FIRE-RATED ARCHITECTURAL 1/8" AND 1" PAN FLOOR DOOR

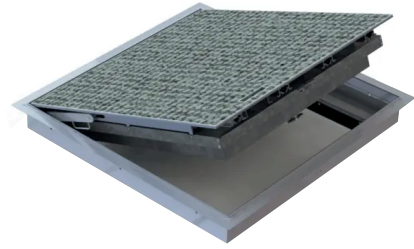

DIMENSIONS AND APPEARANCE

>> CLICK TO VIEW ADDITIONAL DETAILS AND PRICING <<

FIRE RATED ARCHITECTURAL 1/8-INCH PAN FLOOR DOOR:
BFDF IS STANDARD WITH 2-HOUR RATING UNLESS 3-HOUR RATING IS CHOSEN UNDER "OPTIONS"

MODEL	WIDTH	X	LENGTH	LOAD	COVER & INSTALL	MATERIAL	OPTIONS
BFDF							
	24" - 48" (250 PSF) ¹ >48" - 52" (150 PSF) ²		24" - 60" (250 PSF) 60" - 96" (150 PSF)	P - 250 PSF L - 150 PSF	S - SINGLE DOOR W - ANCHORS PROVIDED L - HANDLE	A - ALUMINUM	T1 - 1/8-INCH TILE DOOR 3HR - 3 HOUR RATING ³ BI - BOLT-IN INSTALLATION ⁴ SC - SELF CLOSING MECHANISM

¹ The load will default to "P" (250 psf) for doors up to and including 48" x 60" (e.g. FDFPA36x36SWL).

² The load will default to "L" (150 psf) for doors greater than 48" x 60" (e.g. FDFLA50x75SWL).

³ Up to 48" x 60" only and 250 psf only.

⁴ 2-hour only.


FIRE RATED ARCHITECTURAL 1-INCH PAN FLOOR DOOR:

MODEL	WIDTH	X	LENGTH	MATERIAL	LOAD	COVER & INSTALL	OPTIONS
BFDF							
	24" - 48"		24" - 48"	A - ALUMINUM	P - 250 PSF	S - SINGLE DOOR W - ANCHORS PROVIDED L - HANDLE	P1 - 1-INCH PAN DOOR BI - BOLT-IN INSTALLATION SC - SELF CLOSING MECHANISM



Intertek

FRAME:



Angle Frame
Cast-In



Angle Frame
Both-In

PROJECT DATA

Custom Sizes Available - Fast!

PROJECT NAME :	QTY	W	H	OPTIONS
ARCHITECT :				
DEALER :				
CONTRACTOR :				
LOCATION :	SPECIAL INSTRUCTIONS :			
DATE :				
TAGGING INSTRUCTIONS :	SUBMITTAL APPROVAL : (signature or stamp)			

Scan or Click



To view Pricing and Additional Product Info.



TELEPHONE:
1-800-483-0823
FAX:
1-888-828-6021



385 WILSON STREET EAST,
SUITE 302
ANCASTER, ON, L9G 2C1
CANADA



WEBSITE:
www.BestAccessDoors.ca
E-MAIL:
info@bestaccessdoors.ca