



Quality Access Doors- FAST!

DESCRIPTION

Double Door LightMAX Smoke Vent is engineered with translucent covers using polycarbonate for the added sustainability benefit of natural daylighting. With options like color panels, and electrical operation, Babcock-Davis is sure to meet your building sustainability and fire and life safety needs.

FEATURES

- Double Leaf Design
- Multi-wall Light Transmission
- Optional Dome
- Optional Winch or Linear Actuator
- UL Listed

SPECIFICATIONS

DOOR: Double Leaf

MATERIAL:

Aluminum: 11 gauge

Steel: 14 gauge galvalneal

FINISH: Aluminum: Mill

Steel: Powder Coat, High Reflectance White

CURB: Single wall curb with EZ tab counterflash and mounting flange.

INSULATION: 1 inch polyiso R-6 in cover frame edge and around curb.

GASKET: Extruded EPDM adhesive backed gasket seal, continuous around cover.

HINGE: Heavy-duty pintle hinge with stainless steel hinge pins.

HOLD OPEN ARM: Zinc plated steel automatic hold open arm locks cover in open position.

SPRINGS: Gas spring with damper opens cover against 10psf snow load in not less than 2 sec.

CERTIFICATION: UL 793 listed.

MINIMUM SIZE: 48 inches by 48 inches.

MAXIMUM SIZE: 60 inches by 120 inches, 72 inches by 96 inches.

WARRANTY: 5 year

SUBMITTAL/TECHNICAL DATA SHEET

SKU: **BAC-BSVLB-D**

DOUBLE DOOR SMOKE VENT

LIGHTMAX™



DIMENSIONS AND APPEARANCE

>> CLICK TO VIEW ADDITIONAL DETAILS AND PRICING <<

ORDER GUIDE:


BASE	MATERIAL	W	X	L	DOOR	CURB	OPENING	LINK TEMP	CLOSING	OPTIONS
BSVL					D				R	-
	A - Aluminum Curb & Cover	STANDARD SIZES (IN.)	48" X 48"	D - Double Door	1 - SINGLE WALL	N - NO ELECTRICAL	165	212	R - ROOFTOP CLOSE	DOME, POLYCARB. LPW - WHITE, LPC - CLEAR
			48" X 72"		2 - DOUBLE WALL					
			48" X 96"		3 - CURB MOUNT					
			60" X 60"							
			60" X 96"							
	B - Steel Curb and Aluminum Cover		60" X 120"			H - 110VAC/240VAC	360		W - MANUAL WINCH	DOUBLE DOME, POLYCARB. LPWW - WHITE/WHITE LPCW - CLEAR/WHITE
			72" X 72"				450			MULTIWALL LMC - CLEAR, LMB - BLUE LMZ - BRONZE LMG - GREEN

Additional sizes and options available, call for more information.



LATCH: Zinc plated steel rotary latch designed to hold covers closed against 30psf for single doors. Opens manually by external and internal pull cables. Opens automatically with a fusible link at standard temperature 165°F.

COVER: Extruded aluminum with 5/8 inch structural multi-wall white polycarbonate. Cover withstands a live load of 40psf.

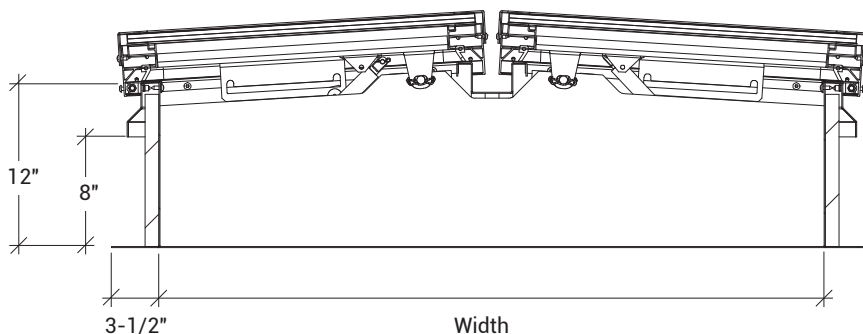

For a complete list of options visit
www.BestAccessDoors.ca

PROJECT DATA

Custom Sizes Available - Fast!



PROJECT NAME :	QTY	W	H	OPTIONS
ARCHITECT :				
DEALER :				
CONTRACTOR :				
LOCATION :	SPECIAL INSTRUCTIONS :			
DATE :				
TAGGING INSTRUCTIONS :	SUBMITTAL APPROVAL : (signature or stamp)			

TELEPHONE:
1-800-483-0823
FAX:
1-888-828-6021

385 WILSON STREET EAST,
SUITE 302
ANCASTER, ON, L9G 2C1
CANADA



WEBSITE:
www.BestAccessDoors.ca
E-MAIL:
info@bestaccessdoors.ca

Scan  or 



To view Pricing and
Additional Product Info.