



Quality Access Doors- FAST!

# SUBMITTAL/TECHNICAL DATA SHEET

## DESCRIPTION

The Quad Door SafeMAX Smoke Vent provides UL793 listed performance and is engineered with metal covers providing an emphasis on reliability and affordability. SafeMAX Smoke Vents are ideal for factory and storage/warehouse occupancies.

## FEATURES

- Quad Leaf Design
- Optional Winch or Linear Actuator
- UL Listed

## SPECIFICATIONS

DOOR: Quad Leaf

### MATERIAL:

Aluminum: 11 gauge  
Steel: 14 gauge galvalneal

### FINISH:

Aluminum: Mill  
Steel: Powder Coat, High Reflectance White

**COVER:** Formed metal cover with liner internally stiffened to withstand a live load of 40psf.

**CURB:** Single wall curb with EZ tab counterflash and mounting flange.

**INSULATION:** 1 inch polyiso R-6 in cover and around curb.

**GASKET:** Extruded EPDM adhesive backed gasket seal, continuous around cover.

**HINGE:** Heavy-duty pintle hinge with stainless steel hinge pins.

**HOLD OPEN ARM:** Zinc plated steel automatic hold open arm locks cover in open position.


**LATCH:** Zinc plated steel rotary latch designed to hold covers closed against 90psf for quad doors. Opens manually by external and internal pull cables. Opens automatically with a fusible link at standard temperature 165°F.

**WARRANTY:** 5 year

SKU: **BAG-BSVSW-Q**

## QUAD DOOR SMOKE VENT

SAFEMAX™

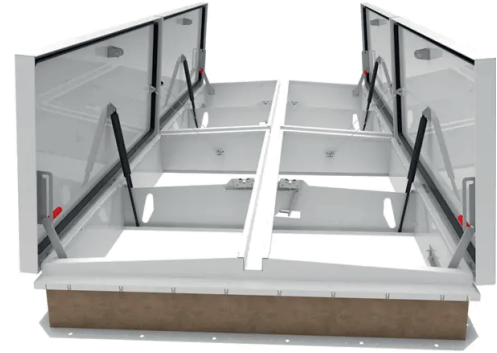

## DIMENSIONS AND APPEARANCE

>> CLICK TO VIEW ADDITIONAL DETAILS AND PRICING <<

### ORDER GUIDE:

BASE	MATERIAL	W	X	L	DOOR	CURB	OPENING	LINK TEMP	CLOSING	OPTIONS
BSVS					Q				R	-
	<b>A</b> - Aluminum Curb & Cover	STANDARD SIZES (IN.)			Q - Quad Leaf	1 - SINGLE WALL 2 - DOUBLE WALL 3 - CURB MOUNT	<b>N</b> - NO ELECTRICAL <b>L</b> - 24VDC/24VAC <b>H</b> - 110VAC/240VAC <b>A</b> - LINEAR ACTUATOR	165 212 280 350 360 450	<b>R</b> - ROOFTOP CLOSE <b>W</b> - MANUAL WINCH <b>L</b> - LINEAR ACTUATOR	<b>SFM</b> - FM LABELED <b>OP1</b> - DOOR POSITION SENSOR <b>B</b> - BURGLAR BARS
	<b>B</b> - Steel Curb and Aluminum Cover	48" X 48"	48" X 72"	48" X 96"						
	<b>W</b> - Steel Curb and Cover	60" X 60"	60" X 96"	60" X 120"						
		72" X 72"	72" X 96"							

Additional sizes and options available, call for more information.


### SPECIFICATIONS:

**SPRINGS:** Gas spring with damper opens cover against 10psf snow load in not less than 2 sec.

Certification: UL 793 listed

Minimum Size: 48 inches by 96 inches

Maximum Size: 60 inches by 240 inches | 72 inches by 192 inches.

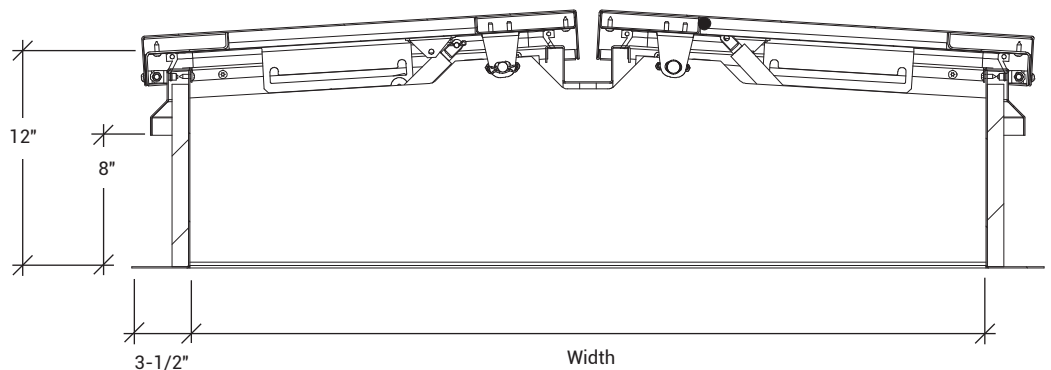

For a complete list of options visit [www.BestAccessDoors.ca](http://www.BestAccessDoors.ca)

## PROJECT DATA

Custom Sizes Available - Fast!

Scan or Click



To view Pricing and Additional Product Info.

PROJECT NAME :	QTY	W	H	OPTIONS
ARCHITECT :				
DEALER :				
CONTRACTOR :				
LOCATION :	SPECIAL INSTRUCTIONS :			
DATE :				
TAGGING INSTRUCTIONS :	SUBMITTAL APPROVAL : (signature or stamp)			

TELEPHONE:  
1-800-483-0823

FAX:  
1-888-828-6021



385 WILSON STREET EAST,  
SUITE 302  
ANCASTER, ON, L9G 2C1  
CANADA



WEBSITE:  
[www.BestAccessDoors.ca](http://www.BestAccessDoors.ca)

E-MAIL:  
[info@bestaccessdoors.ca](mailto:info@bestaccessdoors.ca)