



TECHNICAL DATA SHEET

APPLICATION

Two Rows of Inverted Split "Y"
Blades in a 1-13/16" Frame for Flush
Mounting in Hollow Metal Frames.

SPECIFICATIONS

MATERIAL: 18 gauge CRS frame and
blades. Min size 10" x 10", Max 36" x
36". Multiple sections can be
combined for larger transoms.

CONSTRUCTION: 2 rows of inverted
split "Y" blades at 1" intervals. Blades
are attached by interlocking
construction to the 1-13/16" deep
assembly mounted in a "U" channel
frame. Non-vision construction.

FRAME: For installation into hollow
metal frame by others. Frame inside
dimensions of opening = order size.

FASTENERS: Mounting bracket
furnished with hex head self-drilling
tek screw.

FREE FLOW AREA: 50% free area.

SKU: **BAG-DLIY-B**


FLUSH-MOUNTED LOUVER FOR TRANSOMS



DIMENSIONS AND APPEARANCE

>> CLICK TO VIEW ADDITIONAL DETAILS AND PRICING <<

A split louver with two rows of inverted blades that fits
doors 1-3/8" and wider. The two sides of the louver
are each 3/4" deep and attach to the door with screws
on both sides. 50% free area.

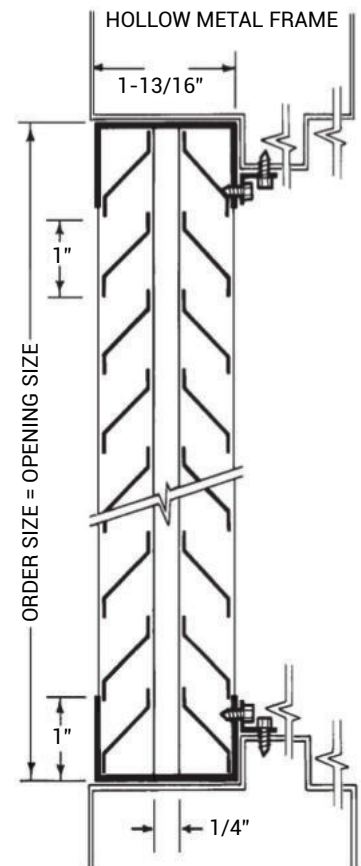



For a complete list of options visit
www.BestAccessDoors.ca

PROJECT DATA

Custom Sizes & Options Available - Fast!

PROJECT NAME :	QTY	W	H	OPTIONS
ARCHITECT :				
DEALER :				
CONTRACTOR :				
LOCATION :	SPECIAL INSTRUCTIONS :			
DATE :	SUBMITTAL APPROVAL : (signature or stamp)			
TAGGING INSTRUCTIONS :				

Scan  or  Click



To view Pricing and
Additional Product Info.



TELEPHONE:
1-800-483-0823
FAX:
1-888-828-6021



385 WILSON STREET EAST,
SUITE 302
ANCASTER, ON, L9G 2C1
CANADA



WEBSITE:
www.BestAccessDoors.ca
E-MAIL:
info@bestaccessdoors.ca