



Quality Access Doors- FAST!

# SUBMITTAL/TECHNICAL DATA SHEET

## APPLICATION

The DWF fire-rated, knee wall door enables access to non-habitable space located behind a vertical wall. White finished door sash is 2.6 inches thick and is filled with fire-proof insulation material. The door structure reduces heat transfer in the winter or summer months and additionally prevents from quick spread of fire. The door can be installed in a right and left opening version.

## FEATURES

- Ready for quick installation
- Fire classification as per EN 13501-2 - EI145
- 3 years warranty

## SPECIFICATIONS

**DOOR:**  
Insulated with fire-proof material, 2½"  
Thermal insulation thickness: 2¾"  
Finished on both sides with white HDF board.

**FRAME:**  
Made of pinewood.  
Depth (Jamb): 3½"  
Equipped with a seal.

**EQUIPMENT:**  
Handle with a lock to ensure tight closing.  
1¾ wide wooden finishing slats in natural colour.

SKU: **BAC-DWF**

## L-SHAPED COMBINATION DOORS

FIRE-RATED



## DIMENSIONS AND APPEARANCE

>> CLICK TO VIEW ADDITIONAL DETAILS AND PRICING <<

### SIZES:

| No. | Size    |
|-----|---------|
| 1   | 21 x 31 |
| 2   | 27 x 35 |

### TECHNICAL PARAMETERS:


| No. | Description                     | Value              | Standard         |
|-----|---------------------------------|--------------------|------------------|
| 1   | Door heat transfer coefficient  | U = 0.11 BTU/hft²F | PN-EN 10211:2008 |
| 2   | Tightness                       | 4th class*         | EN 12207         |
| 3   | Fire resistance (on both sides) | EI,45              | EN 13501-2       |

\* Manufacturer's internal calculations

### ASSEMBLY INFORMATION

DWF knee wall door comes pre assembled and must be installed in framed rough opening in accordance with the included fitting instructions. One must ensure that the gap between door frame and rough opening framing is properly insulated.

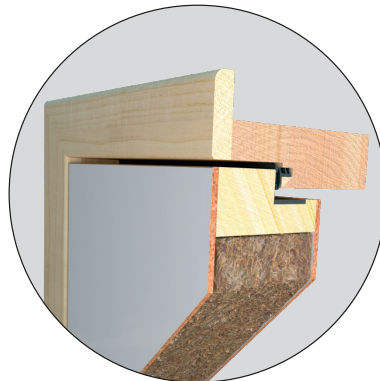

For more detailed information check the second page



For a complete list of options visit [www.BestAccessDoors.ca](http://www.BestAccessDoors.ca)

## PROJECT DATA

Custom Sizes Available - Fast!

Scan  or  Click



To view Pricing and Additional Product Info.

| PROJECT NAME :         | QTY  | W | H | OPTIONS |
|------------------------|--|---|---|---------|
| ARCHITECT :            |  |   |   |         |
| DEALER :               |  |   |   |         |
| CONTRACTOR :           |  |   |   |         |
| LOCATION :             | SPECIAL INSTRUCTIONS :                       |   |   |         |
| DATE :                 | SUBMITTAL APPROVAL :<br>(signature or stamp) |   |   |         |
| TAGGING INSTRUCTIONS : |  |   |   |         |

TELEPHONE:  
1-800-483-0823  
FAX:  
1-888-828-6021










385 WILSON STREET EAST,  
SUITE 302  
ANCASTER, ON, L9G 2C1  
CANADA



WEBSITE:  
[www.BestAccessDoors.ca](http://www.BestAccessDoors.ca)  
E-MAIL:  
[info@bestaccessdoors.ca](mailto:info@bestaccessdoors.ca)

**BAC-DWF**

**FIRE-RATED  
L-SHAPED COMBINATION DOORS**

|                                |       |   |   |   |   |   |   |   |
|--------------------------------|-------|---|---|---|---|---|---|---|
| Commercial sizes [cm]          |       | 55 x 80   | 55 x 80   | 60 x 100  | 60 x 110  | 70 x 90   | 70 x 100  | 70x 110   |
| Code                           |       | 869800  | 869822  | 869824  | 869825  | 869833  | 869834  | 869835  |
|                                |       |  |  |  |  |  |  |  |
| Opening dimensions [cm]        | A x B | 55 x 80   | 55 x 80   | 60 x 100  | 60 x 110  | 70 x 90   | 70 x 100  | 70x 110   |
| Door dimensions [cm]           | W x L | 53.4 x 78.4   | 58.4 x 78.4   | 58.4 x 98.4   | 58.4 x 108.4  | 68.4 x 88.4   | 68.4 x 98.4   | 68.4 x 108.4  |
| Frame internal dimensions [cm] | M x N | 48 x 73   | 53 x 73   | 53 x 93   | 53 x 103  | 63 x 83   | 63 x 93   | 63 x 103  |
| Frame width [cm]               | S     | 9   |   |   |   |   |   |   |
| Frame thickness [cm]           | Z     | 2.7   |   |   |   |   |   |   |

