SUBMITTAL/TECHNICAL DATA SHEET

BEST ACCESS DOORS
Quality Access Doors- *FAST!*

SKU: **BAC-FGRG-RC**

GLASS FIBER REINFORCED
GYPSUM ACCESS DOOR PUSH UP RADIUS CORNERS
FOR DRYWALL CEILING ONLY

STANDARD OPTIONS

METERIAL:
Lightweight fiberglass-reinforced gypsum

HINGE:
No hinge. Gravity based closure and removable door.

LOCK / LATCH: None

FINISH:
Rounded corners (radius finish). To be primed and painted on site.

OLD SIZES AVAILABLE:
Non-stocked doors manufactured in 15 business days.

PACKAGING:
Individually wrapped, 1 access door per box

FEATURES

CORNERS:
Square corners, round door
HINGES: Presence of hinges
LOCK / LATCH:
Cylinder, screwdriver latch
GASKETS:
Neoprene gasket

Check Second Page for Complete Option List

For a complete list of options visit www.BestAccessDoors.ca

Scan or Click

To view Pricing and Additional Product Info.

LEED READY: THIS PRODUCT CONTRIBUTES TO LEED® CREDITS

INSTALLATION

>> CLICK TO VIEW ADDITIONAL DETAILS AND PRICING <<

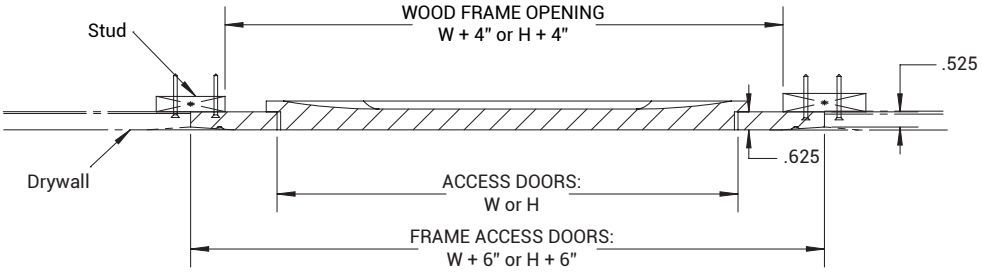

DIMENSIONS AND APPEARANCE

STANDARD SIZES:

DOOR SIZE W x H INCHES	(MM)	WEIGHT LBS	KG
9 x 9	(229 x 229)	6.00	2.72
12 x 12	(304 x 304)	8.00	3.63
16 x 16	(406 x 406)	10.0	4.54
18 x 18	(457 x 457)	11.0	4.99
24 x 24	(609 x 609)	16.0	7.26

Rough wall opening is door size + 6" or + 152 mm

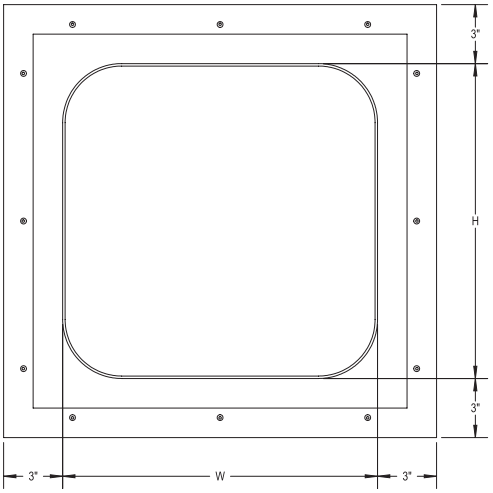

PROJECT DATA

Custom Sizes Available - Fast!

PROJECT NAME :	QTY	W	H	OPTIONS
ARCHITECT :				
DEALER :				
CONTRACTOR :				
LOCATION :	SPECIAL INSTRUCTIONS :			
DATE :				
TAGGING INSTRUCTIONS :	SUBMITTAL APPROVAL : (signature or stamp)			

TELEPHONE:
1-800-483-0823
FAX:
1-888-828-6021

385 WILSON STREET EAST,
SUITE 302
ANCASTER, ON, L9G 2C1
CANADA

WEBSITE:
www.BestAccessDoors.ca

E-MAIL:
info@bestaccessdoors.ca

BEST ACCESS DOORS
Quality Access Doors- FAST!

SUBMITTAL

TELEPHONE:
1-800-483-0823
FAX:
1-888-828-6021

385 WILSON STREET EAST,
SUITE 302
ANCASTER, ON, L9G 2C1
CANADA

WEBSITE:
www.BestAccessDoors.ca
E-MAIL:
info@bestaccessdoors.ca

BAC-FGRG-RC

GLASS FIBER REINFORCED GYPSUM ACCESS DOOR PUSH UP RADIUS CORNERS

OPTIONS

This comprehensive list includes all available options. Please consult our catalog or contact our customer service to verify the feasibility of your chosen combination.

LOW SECURITY LOCKING MECHANISM

☐ 35
Screwdriver operated cam latch

☐ 220
Screwdriver operated cylinder Cam latch

☐ 80
Ring/tool key operated slam latch

☐ 55
Hex head slam latch and ring key operated slam latch

☐ 30
Slide latch

☐ 50
Allen hex head cam latch

HANDLES

☐ 25
WITH KEY - 4“ handle and key operated cam latch

☐ 100K
Key-operated recessed handle cam latch with cap over key path

☐ 20
WITHOUT KEY - 4“ handle operated cam latch

☐ 22
WITHOUT KEY - 4“ handle operated slam latch

☐ 21
WITHOUT KEY
Fixed 4“ handle

☐ 26
WITHOUT KEY - L handle

MEDIUM SECURITY LOCKING MECHANISM

☐ 10
Key-operated cylinder cam latch

☐ 15
Mortise cam latch preparation
15C
Mortise cam latch preparation, keyed differently
15CKA
Mortise cam latch preparation, keyed alike

☐ 85
Mortise slam latch

☐ 85C
Mortise slam latch with cylinder
85CKA
Mortise slam latch cylinder keyed alike

☐ 90
Pinned hex head cam latch

☐ C
Cylinder cam latch, keyed differently
CKA
Cylinder cam latch, keyed alike

MATERIALS

☐ GS
Galvanneal steel

☐ AL
Aluminum

☐ SS
Stainless steel

☐ CR
Cold rolled steel

HIGH SECURITY LOCKING MECHANISM

☐ 40
Mortise deadbolt lock

☐ 40C
Mortise Deadbolt Lock with Cylinder, keyed differently
40CKA
Mortise deadbolt lock

☐ 99
Inside release thumbturn for mortise deadbolt lock

☐ 45
Mortise preparation for detention deadbolt lock

☐ 46
Detention deadbolt lock

☐ 47
ClDetention deadbolt Key

OTHERS

☐ 60
Gasket

☐ 160
Holding cable

☐ 240
Masonry anchors