SUBMITTAL/TECHNICAL DATA SHEET

BEST ACCESS DOORS
Quality Access Doors- *FAST!*

SKU: **BAC-FRU**

FIRE RATED ACCESS PANEL INSULATED UPWARD OPENING

FOR CEILINGS ONLY

STANDARD OPTIONS

MATERIAL:
16 gauge cold rolled steel frame & 20 gauge galvanneal steel door

HINGE:
Continuous piano hinge allows opening to 89°
Note: Hinge on second dimension (Height)

LOCK / LATCH:
Self-locking latch with hexagonal head; exterior side and selflocking latch with key/tool; interior side

FINISH:
High quality white powder coat primer

PACKAGING:
Individually wrapped, 1 per box

INSULATION:
Insulation 2'' thick mineral wool

OPTIONS AVAILABLE

MATERIAL:
Stainless Steel (SS)

For a complete list of options visit www.BestAccessDoors.ca

Scan or Click

To view Pricing and Additional Product Info.

LEED READY: THIS PRODUCT CONTRIBUTES TO LEED® CREDITS

INSTALLATION

>> CLICK TO VIEW ADDITIONAL DETAILS AND PRICING <<

[3 HOUR CEILING APPLICATION]

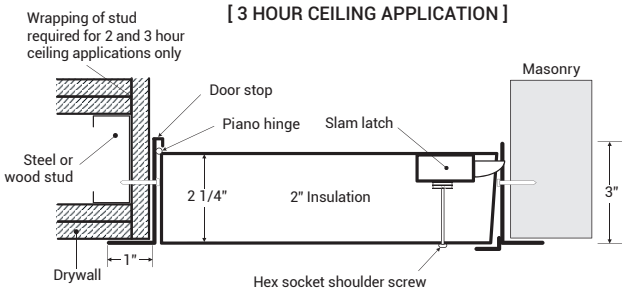

[1 HOUR CEILING APPLICATION]

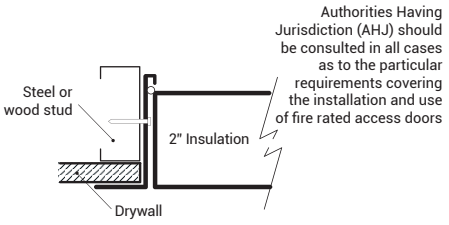

DIMENSIONS AND APPEARANCE

STANDARD SIZES:

DOOR SIZE W x H INCHES	(mm)	NUMBER OF LOCKS	WEIGHT LBS	KG
22 x 30	(558 x 762)	1	33.3	15.1
22 x 36	(558 x 914)	2	39.2	17.8
24 x 24	(609 x 609)	1	29.8	13.5

(Clear Opening with Door Opened = W - 3 1/2")
Rough Ceiling Opening is Door Size + 1/4" or + 6mm

Fire Rating Information on Page 3

Check Second Page for Complete Option List

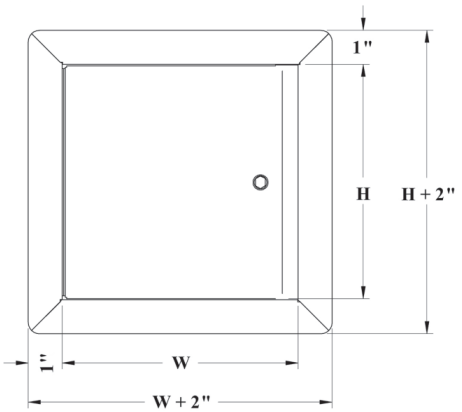

PROJECT DATA

Custom Sizes Available - Fast!

PROJECT NAME :	QTY	W	H	OPTIONS
ARCHITECT :				
DEALER :				
CONTRACTOR :				
LOCATION :	SPECIAL INSTRUCTIONS :			
DATE :				
TAGGING INSTRUCTIONS :	SUBMITTAL APPROVAL : (signature or stamp)			

TELEPHONE:
1-800-483-0823
FAX:
1-888-828-6021

385 WILSON STREET EAST,
SUITE 302
ANCASTER, ON, L9G 2C1
CANADA

WEBSITE:
www.BestAccessDoors.ca

E-MAIL:
info@bestaccessdoors.ca

BEST ACCESS DOORS
Quality Access Doors- FAST!

SUBMITTAL

TELEPHONE:
1-800-483-0823
FAX:
1-888-828-6021

385 WILSON STREET EAST,
SUITE 302
ANCASTER, ON, L9G 2C1
CANADA

WEBSITE:
www.BestAccessDoors.ca
E-MAIL:
info@bestaccessdoors.ca

BAC-FRU

FIRE RATED INSULATED UPWARD OPENING ACCESS DOOR

OPTIONS

This comprehensive list includes all available options. Please consult our catalog or contact our customer service to verify the feasibility of your chosen combination.

LOW SECURITY LOCKING MECHANISM

☐ 35
Screwdriver operated cam latch

☐ 220
Screwdriver operated cylinder Cam latch

☐ 80
Ring/tool key operated slam latch

☐ 55
Hex head slam latch and ring key operated slam latch

☐ 30
Slide latch

☐ 50
Allen hex head cam latch

HANDLES

☐ 25
WITH KEY - 4“ handle and key operated cam latch

☐ 100K
Key-operated recessed handle cam latch with cap over key path

☐ 20
WITHOUT KEY - 4“ handle operated cam latch

☐ 22
WITHOUT KEY - 4“ handle operated slam latch

☐ 21
WITHOUT KEY
Fixed 4“ handle

☐ 26
WITHOUT KEY - L handle

MEDIUM SECURITY LOCKING MECHANISM

☐ 10
Key-operated cylinder cam latch

☐ 15
Mortise cam latch preparation
15C
Mortise cam latch preparation, keyed differently
15CKA
Mortise cam latch preparation, keyed alike

☐ 85
Mortise slam latch

☐ 85C
Mortise slam latch with cylinder
85CKA
Mortise slam latch cylinder keyed alike

☐ 90
Pinned hex head cam latch

☐ C
Cylinder cam latch, keyed differently
CKA
Cylinder cam latch, keyed alike

MATERIALS

☐ GS
Galvanneal steel

☐ AL
Aluminum

☐ SS
Stainless steel

☐ CR
Cold rolled steel

HIGH SECURITY LOCKING MECHANISM

☐ 40
Mortise deadbolt lock

☐ 40C
Mortise Deadbolt Lock with Cylinder, keyed differently
40CKA
Mortise deadbolt lock

☐ 99
Inside release thumbturn for mortise deadbolt lock

☐ 45
Mortise preparation for detention deadbolt lock

☐ 46
Detention deadbolt lock

☐ 47
ClDetention deadbolt Key

OTHERS

☐ 60
Gasket

☐ 160
Holding cable

☐ 240
Masonry anchors

BAC-FRU | FIRE RATED INSULATED UPWARD OPENING ACCESS DOOR

FIRE RATING

FOR HORIZONTAL USE ONLY:

CERTIFIED TO STANDARDS: ASTM E119 (2012), CAN/ULC S101 (2007).

RATING ACHIEVED: 3 hours in non-combustible construction. 1 hour in combustible construction.

MAXIMUM SIZE: 24" x 36" (hinges & latch on 36" long sides) (610 mm x 914 mm).

Tolerances on dimension limitations are ± 3" (76 mm) as long as the area does not exceed 864 in^2.

TEMPERATURE RISE: Not applicable.

INSTALLATION: WALLS AND CEILINGS

[3 HOUR CEILING APPLICATION]

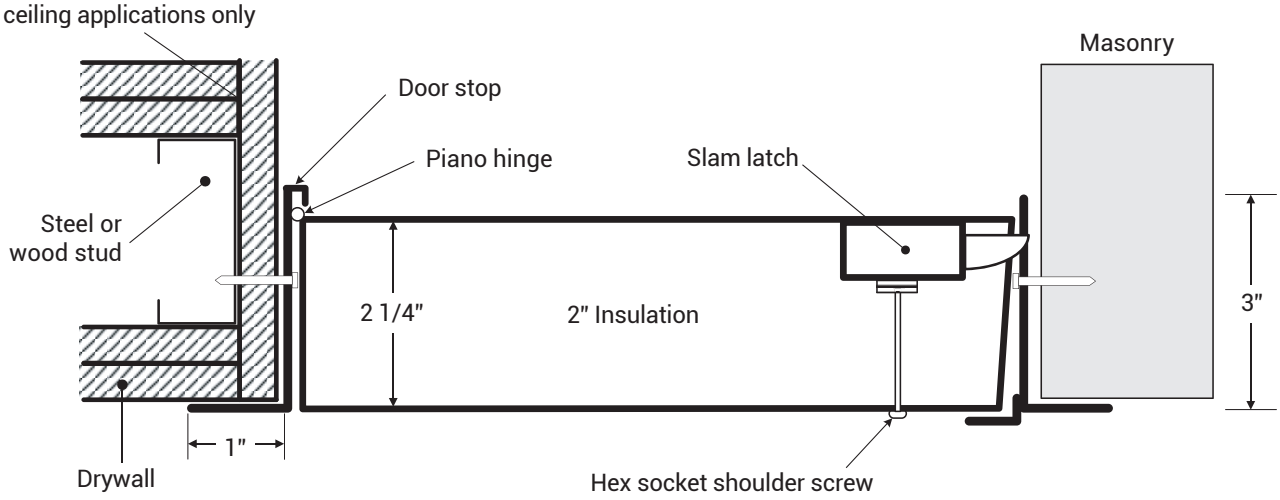

[1 HOUR CEILING APPLICATION]

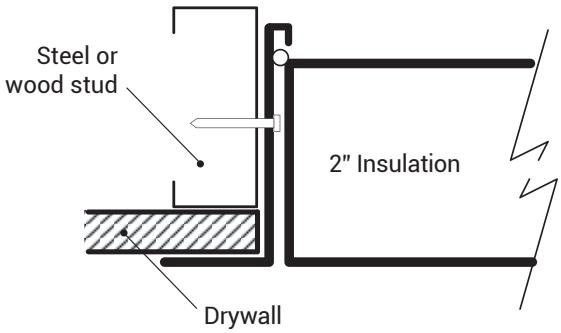

Authorities Having Jurisdiction (AHJ) should be consulted in all cases as to the particular requirements covering the installation and use of fire rated access doors

TELEPHONE:
1-800-483-0823
FAX:
1-888-828-6021

385 WILSON STREET EAST,
SUITE 302
ANCASTER, ON, L9G 2C1
CANADA

WEBSITE:
www.BestAccessDoors.ca
E-MAIL:
info@BestAccessDoors.ca