

### **DESCRIPTION**

A premium flush mount supply vent cover for a 6" diametre duct. Complete with diffuser flaps to control your air flow, this cover fits into the drywall opening of 10.25"x10.25" and has 7 slots over the 6"d.

### **APPLICATION**

- Designed for 1/2" and 5/8" thick drywall.Suitable for both wall and ceiling
- installation.
- Screws directly to your framework (studs or joists) to allow it to be flush.

  • Finish taping and seaming the perimetre
- edge wih your drywall. (PRO TIP: remove the magnetic insert to
- avoid drywall compound getting in the slots)
- · Prime your wall and paint it to your wall colour.
- · The product comes primed white and ready for your paint colour.

### **FEATURES**

- · Magnetic removable triple fibre reinforced cement board grill.
- 18 gauge galvanized satin coat adjustable diffuser
- 4 rare earth magnets (0.250"diametre x 0.060" thick).
- Easy installation, primed and ready to paint.
- Straight radial vent slots.
- Fire Rated, non-flammable.
- Impact Resistant
- Moisture and Water Resistant, Mold Resistant.
- Eco-Friendly Manufacturing and Non-Hazardous

### **SPECIFICATIONS**

- · Over 12.5 square inches (80.64 square centimeters) of open area.

  • Slot Size 0.378" (9.6mm) x length at 6"d
- radial arch.
- 7 rectangular straight radial slots.
- Overall dimensions are 10" x 10" x 0.54"(254mm x 254mm x 13.7mm). Product weight is 1.1 pounds (0.5
- kilograms)

For a complete list of options visit www.BestAccessDoors.ca

# Scan or Click



To view Pricing and Additional Product Info.

## SUBMITTAL/TECHNICAL DATA SHEET


# SKU: BAC-IG-RS6 AND CEILING

REMOVABLE AND MAGNETIC



### DIMENSIONS AND APPEARANCE

>> CLICK TO VIEW ADDITIONAL DETAILS AND PRICING <<

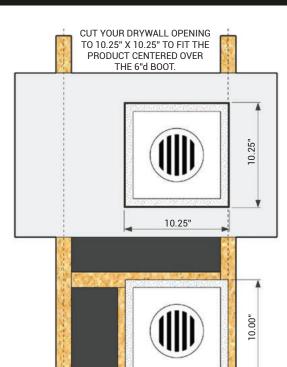


10.00"

16.00"

#### **MATERIAL INFORMATION:**

cycles of freezing and thawing.

Raw Material: cement, fibres, quartz sand, non-hazardous fillers. **Density:** 1.0< D ≤1.2 g/cm3 Asbestos Content: 100% asbestos-free Fire resistance: non-combustible Water Absorption: ≤40% Resistant Bending Strength: ≤10.5 MPa dry Moisture Movement: 0.25 % Freeze Thaw: No distortion after 25 repeated



### PROJECT DATA

### **Custom Sizes Available - Fast!**

	PROJECT NAME :	QTY	w	Н	OPTIONS
	ARCHITECT:				
2	DEALER:				
	CONTRACTOR:				
	LOCATION:	SPECIAL INSTRUCTIONS:			
	DATE:				
	TAGGING INSTRUCTIONS :	SUBMITTAL APPROVAL : (signature or stamp)			
1		•			



TELEPHONE: 1-800-483-0823 FAX: 1-888-828-6021



385 WILSON STREET EAST, **SUITE 302** ANCASTER, ON, L9G 2C1 **CANADA** 



WEBSITE: www.BestAccessDoors.ca

E-MAIL: info@bestaccessdoors.ca