

APPLICATION

Aluminum wall mounted ladders are ideal to be used with any roof hatch. Ladder conforms to OSHA Standards 29CFR-1910.27. For additional support this ladder can also be mounted to the floor using the optional floor bracket.

FEATURES

- 15/16" square extruded aluminum climbing rungs spaced on 12" centers
- Loading: 300 LBS at midspan
- 3/8" x 2 1/2" Aluminum Side Members
- 7" Stand-off brackets
- Mill Finish

SPECIFICATIONS

- Aluminum Wall Mounted Ladder
- 15/16" square extruded aluminum climbing rungs spaced on 12" centers
- Loading: 300 LBS at midspan
- 3/8" x 2 1/2" Aluminum Side Members
- 7" Stand-off brackets
- Mill Finish

SKU: **BAC-LAD-AL**

ALUMINUM WALL MOUNTED LADDER




SPECIFICATIONS & APPEARANCE

>> CLICK TO VIEW ADDITIONAL DETAILS AND PRICING <<

AVAILABLE SIZE CHART

FEET	INCHES
6ft	96"
8ft	114"
10ft	132"
12ft	150"
14ft	168"

MANUFACTURED BY ACUDOR

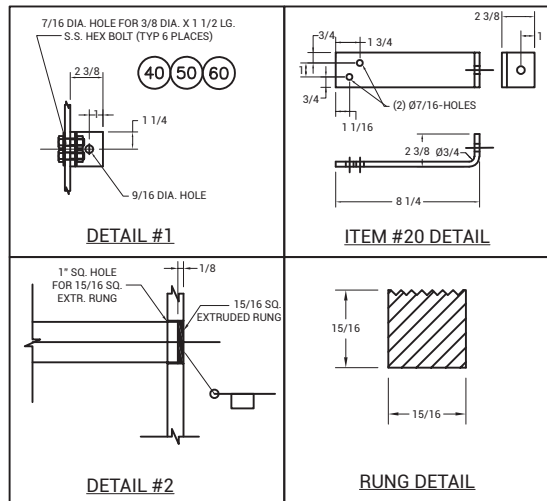

15/16 SQ. EXTR. RUNG.

30

SEE DETAIL #1

20

SEE DETAIL #2

3/8 X 2 1/2 FB

10

CHECK AVAILABLE
SIZE CHART (OVERALL)

For a complete list of options visit
www.BestAccessDoors.ca

PROJECT DATA

Custom Sizes Available - Fast!

PROJECT NAME :	QTY	W	H	OPTIONS
ARCHITECT :				
DEALER :				
CONTRACTOR :				
LOCATION :	SPECIAL INSTRUCTIONS :			
DATE :				
TAGGING INSTRUCTIONS :	SUBMITTAL APPROVAL : (signature or stamp)			

Scan  or  Click



To view Pricing and
Additional Product Info.



TELEPHONE:
1-800-483-0823
FAX:
1-888-828-6021



385 WILSON STREET EAST,
SUITE 302
ANCASTER, ON, L9G 2C1
CANADA



WEBSITE:
www.BestAccessDoors.ca
E-MAIL:
info@bestaccessdoors.ca