

APPLICATION

LME is an insulated folding attic ladder designed to provide safe and easy access to non-inhabited spaces. It eliminates a need for installing more expensive and space consuming staircases. Insulated metal model LME is recommended for garages, inside houses, projects with insulation requirements.

SPECIFICATIONS

HATCH:
Insulated, sandwich type, beige
Thickness: 1 3/8"
Thermal insulation thickness: 1 1/8"
Hatch equipped with a lock.

FRAME:
Pinewood.
Height: 5 1/2"
Gasket: 1 pcs

LADDER:
Metal
Ladder width: 15"
Stringer height: 3 1/8"
Distance between steps: 9 7/8".

STEPS:
Metal, equipped with anti-slip profile.
Step width: 3 1/8"
Length: 13 1/4"

STANDARD ACCESSORIES:
Stile ends
control rod for opening the hatch.

SKU: **BAC-LME**

METAL FOLDING ATTIC LADDER



DIMENSIONS AND APPEARANCE

>> CLICK TO VIEW ADDITIONAL DETAILS AND PRICING <<

DIMENSIONS:


| Rough Opening | Room Height |
|---------------|--------------------|
| 22 1/2" x 47" | 7' 9" - 9' 4" |
| 25" x 47" | |
| 22 1/2" x 54" | |
| 25" x 54" | 7' 9 5/8" - 10' 2" |
| 30" x 54" | |

TECHNICAL PARAMETERS:

| | |
|---------------------------|--------------|
| Maximum loading | 400 lbs |
| Heat transfer coefficient | R-value: 5.3 |

COMPATIBLE ACCESSORIES:

| | |
|---------------------------|--|
| Metal handrail LXH | While ordering handrail please provide attic ladder type. Handrail can be mounted on the left or right side of ladder. |
| Ladder Balustrade LXB-U | The balustrade is available in one standard size 30"x54" for all attic ladders. |
| Wooden trim LXL-W | The trims are available in one size 30"x54" for smaller sizes have to be cut. |
| PCV trim LXL-PVC | The trims are available in one size 30"x54" for smaller sizes have to be cut. |
| Box extension LXN | The standard box height is 4". While ordering the LXN please provide ladder type and size. |
| Box extension LXN | The height of the upper hatch box is 7 3/4" |
| Installation brackets LXX | Maximum ceiling 13 3/4" |

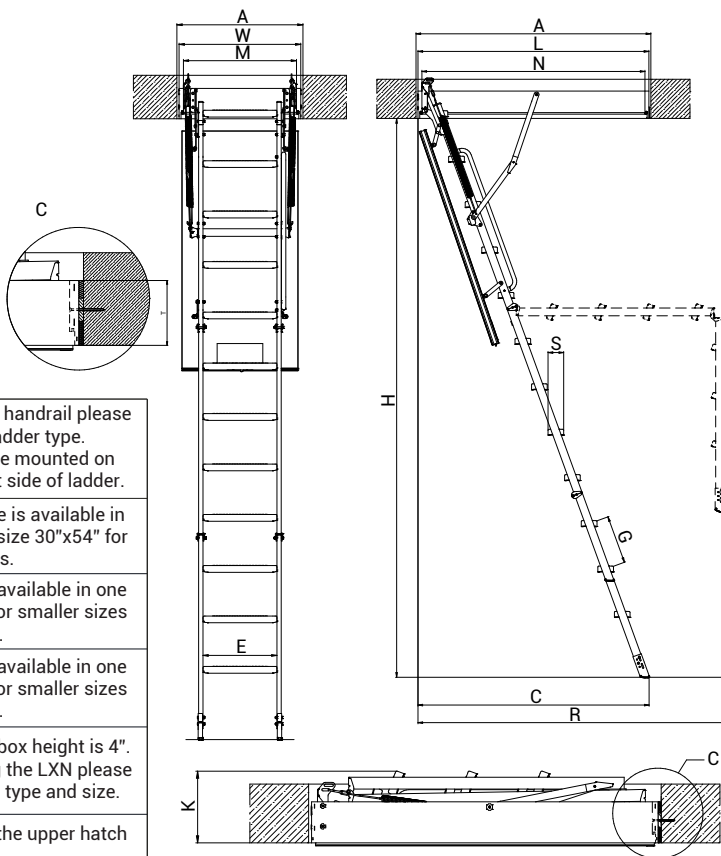

For more details see the second page

PROJECT DATA

| | | | | |
|------------------------|--|---|---|---------|
| PROJECT NAME : | QTY | W | H | OPTIONS |
| ARCHITECT : | | | | |
| DEALER : | | | | |
| CONTRACTOR : | | | | |
| LOCATION : | SPECIAL INSTRUCTIONS : | | | |
| DATE : | | | | |
| TAGGING INSTRUCTIONS : | SUBMITTAL APPROVAL : (signature or stamp) | | | |

Scan  or  Click



To view Pricing and Additional Product Info.

TELEPHONE:
1-800-483-0823
FAX:
1-888-828-6021








385 WILSON STREET EAST,
SUITE 302
ANCASTER, ON, L9G 2C1
CANADA



WEBSITE:
www.BestAccessDoors.ca
E-MAIL:
info@bestaccessdoors.ca

BAC-LME

METAL FOLDING ATTIC LADDER

| | | | | | | |
|----------------------------|-----|---|---|---|---|---|
| LMF | |  |  |  |  |  |
| | | 22½ x 47 | 25 x 47 | 22½ x 54 | 25 x 54 | 30 x 54 |
| Manufacturer's part number | | 869491 | 869494 | 869237 | 869495 | 869496 |
| Ceiling height | H | 7'9 " - 9' 4" | | 7'9⅝" - 10'2" | | |
| Rough opening | AxB | 22½" x 47" | 25" x 47" | 22½" x 54" | 25" x 54" | 30" x 54" |
| Outside frame dimensions | WxL | 22" x 46⅝" | 24½"x46⅝" | 22" x 53½" | 24½" x 53½" | 29½" x 53½" |
| Inside frame dimensions | MxN | 20½" x 44⅞" | 23" x 44⅞" | 20½" x 51¾" | 23" x 51¾" | 28½" x 51¾" |
| Projection | R | 63" | | 66½" | | |
| Landing space | C | 40" - 47" | | 40½" - 51" | | |
| Folded ladder height | K | 10" | | | | |
| Frame height | | 5½" | | | | |

