



Quality Access Doors- FAST!

SUBMITTAL/TECHNICAL DATA SHEET

APPLICATION

LSF is an fire rated scissor attic ladder designed to provide safe and easy access to non-inhabited spaces. It eliminates a need for installing more expensive and space consuming staircases. Fire rated scissors metal model LSF for building codes require fire protections.

SPECIFICATIONS

HATCH:

Insulated, fire-resistant white hatch
 Thickness: 2 1/8"
 Thermal insulation thickness: 1 1/8"
 Hatch equipped with a lock

FRAME:

Metal ladder box with metal trim and quick-installation brackets included
 Height: 5 1/2"


LADDER: Metal scissor ladder.

STEPS:

Metal, equipped with anti-slip profile.
 Tread width: 3 1/8"
 Length: 11 7/8", 12 5/8"

STANDARD ACCESSORIES:

Control rod for opening the hatch

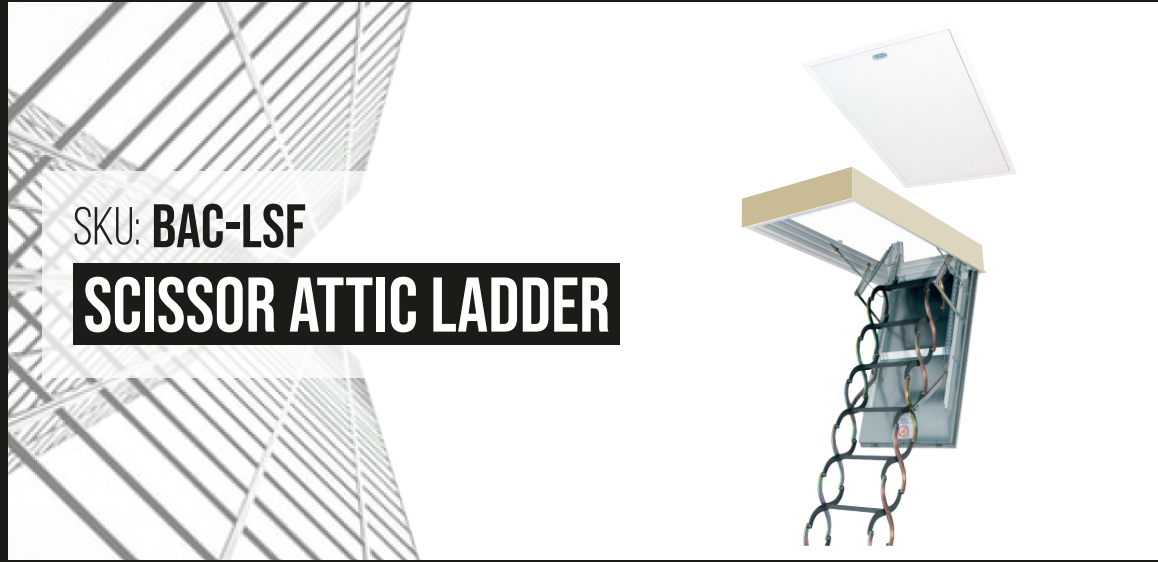

SKU: **BAG-LSF**

SCISSOR ATTIC LADDER

DIMENSIONS AND APPEARANCE

>> CLICK TO VIEW ADDITIONAL DETAILS AND PRICING <<

DIMENSIONS:

| Rough Opening | Room Height |
|---------------|-------------------------|
| 22 1/2" x 47" | 8' 10 1/4" - 9' 10 1/8" |
| 25" x 47" | |

TECHNICAL PARAMETERS:

| |
|-----------------|
| Maximum Loading |
| 350 lbs |
| Fire-Rated |
| El2 = 60 min |

COMPATIBLE ACCESSORIES:

| | |
|-------------------------|---|
| Ladder Balustrade LXB-U | The balustrade is available in one standard size 30"x54" for all attic ladders. |
| LSS additional step | To increase the length of the LSF ladder you can use an extra step: LSS-30 for size 22 1/2" x 47", LSS-32 for size 25 x 47. |

ASSEMBLY INFORMATION



The LSF Attic Ladder is delivered to the customer fully assembled and does not require any pre-installation work. Installation of the product must be carried out in accordance with the included fitting instructions.

For more details see the second page

For a complete list of options visit
www.BestAccessDoors.ca

PROJECT DATA

Custom Sizes Available - Fast!

Scan  or  Click



To view Pricing and Additional Product Info.

| PROJECT NAME : | QTY | W | H | OPTIONS |
|------------------------|------------------------|---|---|---------|
| ARCHITECT : | | | | |
| DEALER : | | | | |
| CONTRACTOR : | | | | |
| LOCATION : | SPECIAL INSTRUCTIONS : | | | |
| DATE : | SUBMITTAL APPROVAL : | | | |
| TAGGING INSTRUCTIONS : | (signature or stamp) | | | |



TELEPHONE:
 1-800-483-0823
 FAX:
 1-888-828-6021

385 WILSON STREET EAST,
 SUITE 302
 ANCASTER, ON, L9G 2C1
 CANADA

WEBSITE:
www.BestAccessDoors.ca
 E-MAIL:
info@bestaccessdoors.ca

BAC-LSF

SCISSOR ATTIC LADDERS

| | | | |
|---|-----|---|---|
| SIZE: | |  |  |
| LSF | | 22x47 | 25 x 47 |
| Ceiling height | H | 8' 10 ³ / ₈ " - 9' 10 ¹ / ₈ " | |
| Rough opening | AxB | 22 ¹ / ₂ "x47" | 25"x47" |
| Outside frame dimensions | | 22"x46 ⁵ / ₈ " | 24 ¹ / ₂ "x46 ⁵ / ₈ " |
| Outside frame dimensions including trim | | 24 ¹ / ₂ "x49" | 27"x49" |
| Internal dimensions | | 20"x45 ¹ / ₄ " | 22 ¹ / ₂ "x45 ¹ / ₄ " |
| Projection | R | 67" - 71" | |
| Landing space | C | 65" - 51 ¹ / ₄ " | |
| Folded ladder height | K | 17 ³ / ₄ " | |
| Frame height | | 5 ¹ / ₂ " | |
| Step length | E | 11 ⁷ / ₈ " | 12 ⁵ / ₈ " |
| Step width | | 3 ¹ / ₈ " | |
| Possibility of adding additional steps | | LSS-30 | LSS-32 |

| | | | | | |
|---|------------------------------------|-------------------------------------|------------------------------------|------------------------------------|----------------------------------|
| 1 step removed | | standard length of ladder (10steps) | | 1 additional step | |
| 7'10 ¹ / ₂ " | 8'10 ³ / ₈ " | 8'10 ³ / ₈ " | 9'10 ¹ / ₈ " | 9'10 ¹ / ₈ " | 10'6" |
| Ladder dimensions are equal to all sizes. | | | | | |
| 65" | 65" | 67" | 71" | 72 ⁷ / ₈ " | 82 ³ / ₄ " |
| 39 ³ / ₈ " | 55 ⁵ / ₈ " | 65" | 51 ¹ / ₄ " | 47 ¹ / ₄ " | 55 ⁵ / ₈ " |

