



Quality Access Doors- FAST!

SUBMITTAL/TECHNICAL DATA SHEET



SKU: **BAG-LST**
SCISSOR ATTIC LADDER

APPLICATION

LST is an insulated scissor attic ladder designed to provide safe and easy access to non-inhabited spaces. It eliminates a need for installing more expensive and space consuming staircases. Insulated scissor model LST is recommended for garages, inside houses, projects with insulation requirements.

SPECIFICATIONS

HATCH:
 Insulated, sandwich type, white
 Thickness: 1 3/8"
 Thermal insulation thickness: 1 1/8"
 No lock – unloading mechanism automatically presses the hatch to the box, opening with the use of a control rod.

FRAME:
 Pinewood ladder box with metal trim and quick-installation brackets included.
 Height: 7 5/8"
 Gasket: 1 pcs

LADDER: Metal scissor ladder.

STEPS:
 Metal, equipped with anti-slip profile.
 Tread width: 3 1/8"
 Length: 11 1/8", 15"

STANDARD ACCESSORIES:
 Control rod for opening the hatch
 White metal trim
 Installation brackets

■ DIMENSIONS AND APPEARANCE

>> CLICK TO VIEW ADDITIONAL DETAILS AND PRICING <<

DIMENSIONS:

Rough Opening	Room Height
22 1/2" x 31 1/2"	Standard: 8' 2 3/8" - 9' 2 1/4" adjustable to: 7' 6" - 10' 10" Details in chart below
27 1/2" x 31 1/2"	
22 1/2" x 47"	
25" x 47"	
22 1/2" x 54"	
25" x 54"	
30 1/2" x 54"	

TECHNICAL PARAMETERS:

Maximum Loading
350 lbs
Heat Transfer Coefficient
R-value: 5.2

COMPATIBLE ACCESSORIES:

Ladder Balustrade LXB-U	The balustrade is available in one standard size 30"x54" for all attic ladders.
Installation brackets L XK	The standard box height is 4". While ordering the LXN please provide ladder type and size.
Upper hatch LXW	The height of the upper hatch box is 73/4". For the LST model ladder, the extension box should be installed prior to the upper hatch.
LSS additional step	To increase the length of the ladder you can use an extra step: LSS-38 for size 27 1/2 x 31 1/2, 30 1/2 x 54, LSS-31 for sizes: 22 1/2 x 31 1/2, 22 1/2 x 47, 22 1/2 x 54, 25 x 47, 25 x 54.

ASSEMBLY INFORMATION

The LST Attic Ladder is delivered to the customer fully assembled. Before installing the attic ladder in the ceiling, screw the finishing lining slats to the upper hatch. The product is installed with the use of mounting brackets included to the ladder (maximum ceiling thickness 94/5 "). Installation of the product must be carried out in accordance with the included fitting instructions.

For more details see the second page

For a complete list of options visit
www.BestAccessDoors.ca

■ PROJECT DATA

Custom Sizes Available - Fast!

Scan or Click



To view Pricing and Additional Product Info.

PROJECT NAME :	QTY	W	H	OPTIONS
ARCHITECT :				
DEALER :				
CONTRACTOR :				
LOCATION :	SPECIAL INSTRUCTIONS :			
DATE :	SUBMITTAL APPROVAL : (signature or stamp)			
TAGGING INSTRUCTIONS :				

TELEPHONE:
1-800-483-0823
 FAX:
1-888-828-6021








385 WILSON STREET EAST,
 SUITE 302
 ANCASTER, ON, L9G 2C1
 CANADA




WEBSITE:
www.BestAccessDoors.ca
 E-MAIL:
info@bestaccessdoors.ca

BAC-LST

SCISSOR ATTIC LADDERS

SIZE:								
LST	22½"x31½"	27½"x31½"	22½"x47"	25"x47"	22½"x54"	25"x54"	30½" x 54"	
Manufacturer's part number	66875	66876	66820	66821	66822	66823	66877	
Ceiling height	H	8'2¾" - 9'2¼"						
Rough opening	AxB	22½"x31½"	27½"x31½"	22½"x47"	25"x47"	22½"x54"	25"x54"	30½" x 54"
Outside frame dimensions		22"x31¼"	27"x31¼"	22"x465/8"	24½"x465/8"	22"x53¾"	24½"x53¾"	30" x 53¾"
Outside frame dimensions including trim		243/8"x33¼"	291/8"x33¼"	243/8"x49"	26¾"x49"	243/8"x55¾"	26¾"x55¾"	317/8" x 55¾"
Internal frame dimensions		20½"x29¼"	251/8"x29¼"	20½"x 44¾"	227/8"x44¾"	20½"x51⅞"	227/8"x51¾"	28" x 51¾"
Projection	R	59"						
Landing space	C	57½" - 52¾"						
Folded ladder height	K	15"						
Frame height		7⅝"						
Approx. Weight (lbs)		84	92	88	93	97	99	110
Step length	E	11⅞"	15"	11⅞"				15"
Step width		3⅞"						
Possibility of adding additional steps		LSS-31	LSS-38	LSS-31			LSS-38	

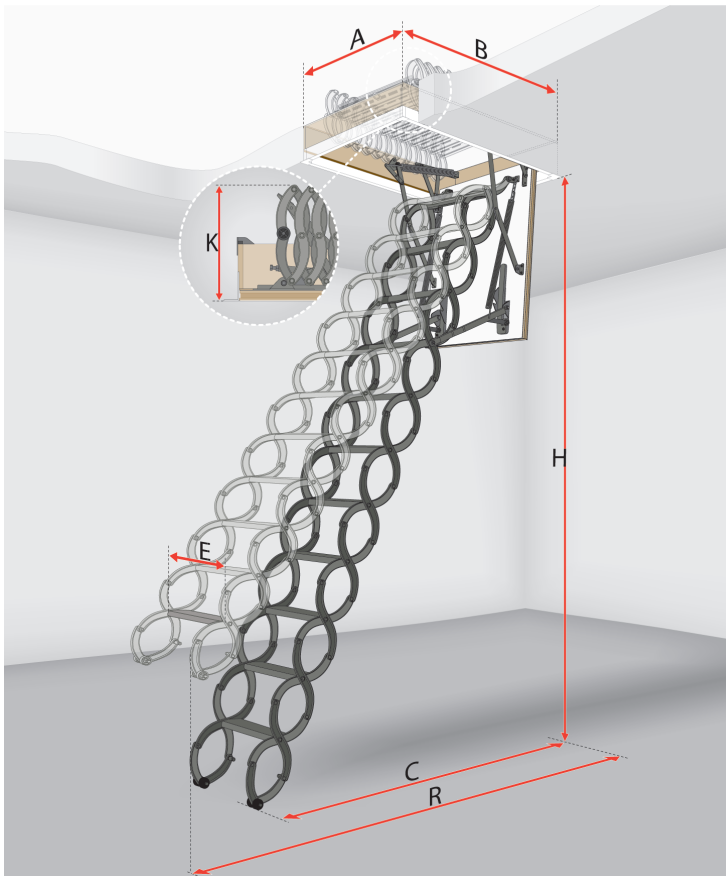

1 step removed		1 additional step		2 additional steps	
7'6½"	8'2¾"	9'2¼"	9'10⅞"	9'10⅞"	10'10"
Ladder dimensions are equal to all sizes.					
55⅞"		63"		67"	
53⅞"	51⅝"	59"	57⅞"	63"	59"