



Quality Access Doors- FAST!

SUBMITTAL/TECHNICAL DATA SHEET

STANDARD OPTIONS

COVER:

14 gauge galvaneal steel with 1" fiberglass insulation

CURB:

14 gauge galvaneal steel with 1" fiber board insulation

SEAL:

"D" - foam adhesive gasket provides a flush and tight fit

FINISH:

High quality white powder coat primer

COMPONENTS:

- 2 gas cylinders
- Retaining bar handles

LEED®:

Painted white, the TRH could contribute to meeting SSc7.2 (Heat Island Effect) requirements for highly reflective roofing materials.

OPTIONS AVAILABLE

MATERIAL:

Aluminum




SKU: BAC-RHT

ROOF HATCH

INSTALLATION

>> CLICK TO VIEW ADDITIONAL DETAILS AND PRICING <<

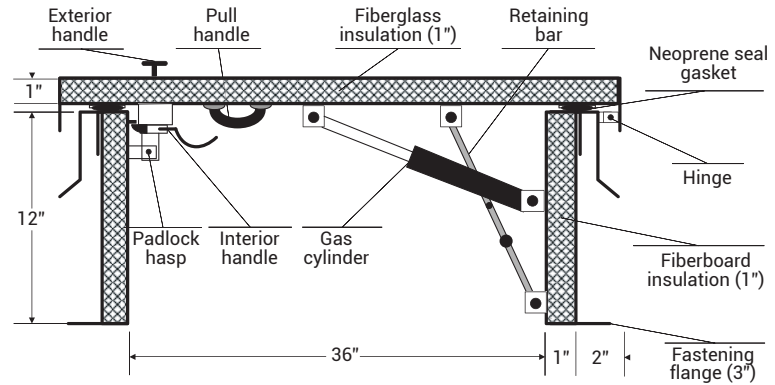

DIMENSIONS AND APPEARANCE

For a complete list of options visit www.BestAccessDoors.ca

Scan or Click




To view Pricing and Additional Product Info.

LEED READY: THIS PRODUCT CONTRIBUTES TO LEED® CREDITS

DOOR SIZE W x H INCHES (MM)	EXTERIOR SIZE W x H INCHES (MM)	NUMBER OF LOCKS	WEIGHT LBS	WEIGHT KG
36 x 30 (914 x 762)	42 x 36 (1067 x 614)	1	178	81
36 x 36 (914 x 914)	42 x 42 (1067 x 1067)	1	188	85

ROOF OPENING = SIZE OF ROOF HATCH

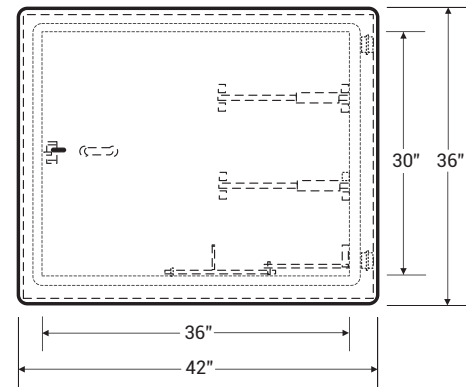

PROJECT DATA

Custom Sizes Available - Fast!

PROJECT NAME :	QTY	W	H	OPTIONS
ARCHITECT :				
DEALER :				
CONTRACTOR :				
LOCATION :	SPECIAL INSTRUCTIONS :			
DATE :				
TAGGING INSTRUCTIONS :	SUBMITTAL APPROVAL : (signature or stamp)			



TELEPHONE:
1-800-483-0823
FAX:
1-888-828-6021



385 WILSON STREET EAST,
SUITE 302
ANCASTER, ON, L9G 2C1
CANADA



WEBSITE:
www.BestAccessDoors.ca
E-MAIL:
info@bestaccessdoors.ca