SUBMITTAL/TECHNICAL DATA SHEET

Quality Access Doors- *FAST!*

SKU: **BAC-RHT**

ROOF HATCH

STANDARD OPTIONS

COVER:
14 gauge galvanneal steel with 1" fiberglass insulation

CURB:
14 gauge galvanneal steel with 1" fiber board insulation

SEAL:
"D" - foam adhesive gasket provides a flush and tight fit

FINISH:
High quality white powder coat primer

COMPONENTS:
• 2 gas cylinders
• Retaining bar handles

LEED®:
Painted white, the TRH could contribute to meeting SSc7.2 (Heat Island Effect) requirements for highly reflective roofing materials.

OPTIONS AVAILABLE

METERIAL: Aluminum

For a complete list of options visit www.BestAccessDoors.ca

Scan or Click

To view Pricing and Additional Product Info.

LEED READY: THIS PRODUCT CONTRIBUTES TO LEED® CREDITS

INSTALLATION

>> CLICK TO VIEW ADDITIONAL DETAILS AND PRICING <<

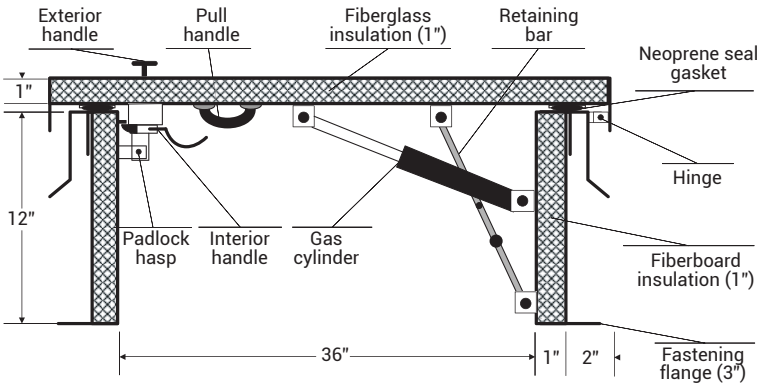

DIMENSIONS AND APPEARANCE

DOOR SIZE W x H INCHES	(MM)	EXTERIOR SIZE W x H INCHES	(MM)	NUMBER OF LOCKS	WEIGHT LBS	KG
36 x 30	(914 x 762)	42 x 36	(1067 x 614)	1	178	81
36 x 36	(914 x 914)	42 x 42	(1067 x 1067)	1	188	85

ROOF OPENING = SIZE OF ROOF HATCH

NOTE: HINGE ON SECOND DIMENSION (HEIGHT)

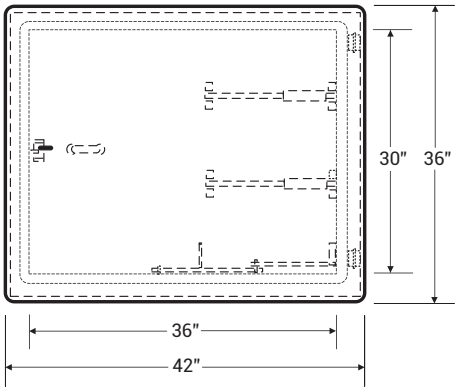

PROJECT DATA

Custom Sizes Available - Fast!

PROJECT NAME :	QTY	W	H	OPTIONS
ARCHITECT :				
DEALER :				
CONTRACTOR :				
LOCATION :	SPECIAL INSTRUCTIONS :			
DATE :				
TAGGING INSTRUCTIONS :	SUBMITTAL APPROVAL : (signature or stamp)			

TELEPHONE:
1-800-483-0823
FAX:
1-888-828-6021

385 WILSON STREET EAST,
SUITE 302
ANCASTER, ON, L9G 2C1
CANADA

WEBSITE:
www.BestAccessDoors.ca

E-MAIL:
info@bestaccessdoors.ca