

DESCRIPTIONS

VersaMount<sup>™</sup> access hatch combines the ease of operation, weathertight performance, and the long service life of a quality Bilco roof hatch, with the added advantage of enhanced installation flexibility.

### SPECIFICATIONS MATERIAL AND FINISH:

Cover and frame are 14 gauge (1.9mm) Type 304 stainless steel. Type 304 stainless steel with bead blast finish. Type 316 stainless steel.

#### COVER:

Breakformed, hollow-metal design with 1" (25mm) concealed insulation, 3" (76mm) beaded, overlapping flange, fully welded at corners, and internally reinforced for 40 psf (195 kg/m2) live load.

#### CURB:

Breakformed, hollow-metal design with 1" (25mm) concealed insulation, 2-5/8" (67mm) mounting flange and 1-1/2" (38mm) apron, fully welded at corners. Stainless steel anchor clips are included.

#### GASKET:

Specially designed, EPDM rubber gasket, permanently adhered to the cover.

#### HINGES:

Heavy pintle hinges with 3/8" (10mm) solid stainless steel hinge pins.

#### LATCH:

Spring latch with inside and outside handles and padlock hasps.

#### LIFT ASSISTANCE:

Electrostatically coated compression springs enclosed in self-lubricating Assistance: composite cylinders. Automatic hold-open arm with 1" (25mm) comfort grip handle.

#### WARRANTY:

Five (5) years from date of purchase covering defects in material and workmanship.

For a complete list of options visit www.BestAccessDoors.ca



To view Pricing and Additional Product Info.

## SUBMITTAL/TECHNICAL DATA SHEET


# SKU: BAC-S-90VM Versamount Access Hatch




### DIMENSIONS AND APPEARANCE

>> CLICK TO VIEW ADDITIONAL DETAILS AND PRICING <<

#### STANDARD SIZES AND WEIGHTS



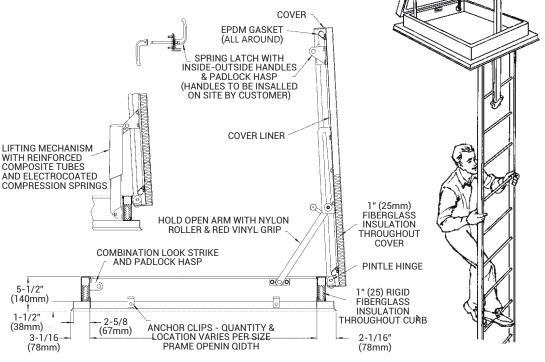

## PROJECT DATA

PROJECT NAME :	QTY	w	Н	OPTIONS
ARCHITECT :				
DEALER :				
CONTRACTOR :				
LOCATION :	SPECIAL INSTRUCTIONS :			
DATE :				
TAGGING INSTRUCTIONS :	SUBMITTAL APPROVAL : (signature or stamp)			





385 WILSON STREET EAST, SUITE 302 ANCASTER, ON, L9G 2C1 CANADA

## 

WEBSITE: www.BestAccessDoors.ca



Custom Sizes Available - Fast!