



Quality Access Doors - FAST!

# TECHNICAL DATA SHEET

## DESCRIPTIONS

Low profile, hem-strengthened Slimline vision lites mount flush to the door with self-attaching, single-sided fasteners. A minimal 1/8" protrusion provides a clean, aesthetic look. VLLP models are for standard door thickness 1-3/4" and glazing thickness 3/16" - 5/16".

## SPECIFICATIONS

**APPLICATION:** For door thickness 1-3/4" and glazing thickness 3/16" - 5/16"

**FRAME MATERIAL:** 20 gauge cold rolled steel

**STANDARD FINISH:** Mineral bronze powder coat

**FASTENERS:** #8A x 1-1/4" Flathead Phillips screws to match finish

**SIZE:**  
Minimum: 4" x 4"  
Maximum: 48" x 90"  
Door Cutout = Order Size (W x H)  
Glazing Size = Order Size minus 1" (W - 1" x H - 1")  
Exposed Glazing = Order Size minus 2" (W - 2" x H - 2")

## OPTIONS

**MATERIALS:** 20 gauge 304 Stainless steel, galvanized steel, zincplated steel

**MULLIONS:** 1" x 5/8" welded-on, formed mullions for a divided lite look that uses one (1) pane of glass

**PAKS:** Vision lite, glazing, and glazing tape combined

**COMPATIBLE AIR LOUVERS**

**GLAZING:**  
Fire-Rated: PPF, FL, FLP, FGL WS  
Non-Rated: TEMP

**OTHER:** Torx screws

For a complete list of options visit [www.BestAccessDoors.ca](http://www.BestAccessDoors.ca)

SKU: **BAC-VLLPB-TMP**

**LOW PROFILE VISION LITES**

SLIMLINE SERIES




## DIMENSIONS AND APPEARANCE

>> [CLICK TO VIEW ADDITIONAL DETAILS AND PRICING <<](#)

VLLPB PAKS: VISION LITE + GLAZING + TAPE APPLIED:

MODEL	ROUGH OPENING	COLOR	GLAZING	FIRE-RATING
VLLP-1212B TEMP PAK	12" x 12"	Bronze	Tempered Glass	Non Fire Rated
VLLP-0535B TEMP PAK	5" x 35"			
VLLP-0627B TEMP PAK	6" x 27"			
VLLP-0722B TEMP PAK	7" x 22"			
VLLP-0832B TEMP PAK	8" x 32"			
VLLP-0836B TEMP PAK	8" x 36"			
VLLP-2424B TEMP PAK	24" x 24"			
VLLP-2430B TEMP PAK	24" x 30"			
VLLP-2432B TEMP PAK	24" x 32"			
VLLP-2436B TEMP PAK	24" x 36"			
VLLP-2460B TEMP PAK	24" x 60"			
VLLP-2464B TEMP PAK	24" x 64"			


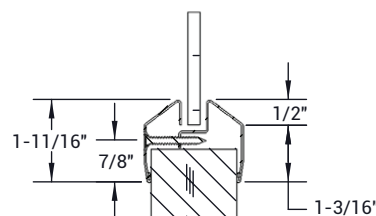


For detailed specifications see submittal sheet

### FIRE RATINGS:

UL listed and labeled/stamped to ANSI/UL 10B, ANSI/UL 10C and CAN/ULC S104 when properly installed in rated and approved door. Ratings up to 180 minutes can be achieved depending on exposed glazing size and area.

Interpretation of fire and building codes may vary. Consult with the local authority having jurisdiction (AHJ) to determine appropriate standards.

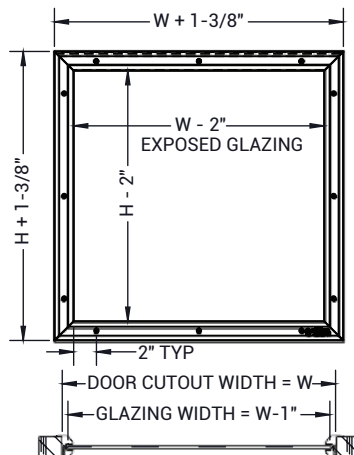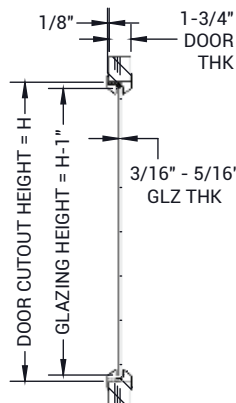

## PROJECT DATA

Custom Sizes & Options Available - Fast!

PROJECT NAME :	QTY	W	H	OPTIONS
ARCHITECT :				
DEALER :				
CONTRACTOR :				
LOCATION :	SPECIAL INSTRUCTIONS :			
DATE :				
TAGGING INSTRUCTIONS :	SUBMITTAL APPROVAL : (signature or stamp)			

Scan or Click



To view Pricing and Additional Product Info.

TELEPHONE:  
1-800-483-0823  
FAX:  
1-888-828-6021

385 WILSON STREET EAST,  
SUITE 302  
ANCASTER, ON, L9G 2C1  
CANADA



WEBSITE:  
[www.BestAccessDoors.ca](http://www.BestAccessDoors.ca)  
E-MAIL:  
[info@bestaccessdoors.ca](mailto:info@bestaccessdoors.ca)