



Quality Access Doors- FAST!

# SUBMITTAL/TECHNICAL DATA SHEET

SKU: **BAG-EXHAUST-14**

## WALL AND CEILING EXHAUST FAN COVER

REMOVABLE & MAGNETIC



### APPLICATION

- Designed for 1/2" and 5/8" thick dry wall
- Suitable for both wall and ceiling installation
- Screws on to the face of your drywall
- Once finished seaming over the flange, the product is ready to be primed and painted to your wall colour
- The inserts comes primed white and ready for your paint colour

### FEATURES



- Magnetic removable triple fibereinforcedcement board grill.
- 24 gauge galvanized satin coat steel frame complete with a beaded edge and adjustable diffuser
- 4 rare earth magnets (0.375"diatre x 0.060" thick)
- Easy installation, primed and ready to paint
- 20 degree angled slots for directional venting and to hide a fan
- Fire Rated, non-flammable
- Impact Resistant
- Moisture and Water resistant, Mold resistant
- Eco- Friendly Manufacturing and
- Non-Hazardous

### SPECIFICATIONS

- Over 150 square inches (967.7 square centimeters) of open area
- Slot Size: 5.563" x 0.32" (141.3.6mm x 8.12mm)
- 30 angled horizontal slots
- Overall dimensions are 16.375" x 16.375" x 0.5" (415.9mm x 415.9mm x 12mm).
- Product weight is 2.86 pounds (1.3 kilograms)

### DIMENSIONS AND APPEARANCE

>> CLICK TO VIEW ADDITIONAL DETAILS AND PRICING <<

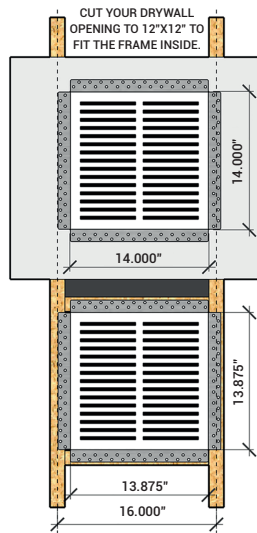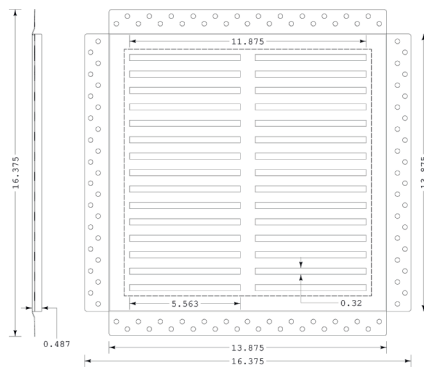

A premium flush mount exhaust fan cover for a 14" x 14" drywall opening. This cover can also be used as a cold air return, and yields a 12.25"x12.25" accessible area.

(NOTE: your exhaust fan and/or motor needs to fit through this area).

#### MATERIAL SPECIFICATIONS:

- Raw Material - Magnesium sulphate cement, plant fibre, glass fibre cloth, perlite
- Density - 0.95 g/cm3
- Water Content - 12%
- Chloride Ion Content - 0%
- Formaldehyde Release - 0%
- Asbestos Content - 0%
- Fire resistance - Incombustibility A1 Class (GB 8624-2006/EN13501-1)
- Water Absorption - 27%
- Resistant Bending Strength - 8 MPa
- Impact Resistance - 1.5 Jim
- Nail-Withdrawal strength - 16 N/mm
- Water Permeability - No water vapour after 24 hours' test
- Refractoriness (Pyrometric cone Test) - 4H
- pH Value - 6.7(8.0)
- Thermal conductivity - 0.2 W/(mK)
- Moisture Movement - 0.25 %
- Heat Shrinkage Rate - 0.05
- Freeze Thaw - No distortion after 25 repeated cycles of freezing and thawing.

For a complete list of options visit [www.BestAccessDoors.ca](http://www.BestAccessDoors.ca)

### PROJECT DATA

Custom Sizes Available - Fast!

PROJECT NAME :	QTY	W	H	OPTIONS
ARCHITECT :				
DEALER :				
CONTRACTOR :				
LOCATION :	SPECIAL INSTRUCTIONS :			
DATE :				
TAGGING INSTRUCTIONS :	SUBMITTAL APPROVAL : (signature or stamp)			

Scan or Click



To view Pricing and Additional Product Info.

TELEPHONE:  
1-800-483-0823  
FAX:  
1-888-828-6021

385 WILSON STREET EAST,  
SUITE 302  
ANCASTER, ON, L9G 2C1  
CANADA



WEBSITE:  
[www.BestAccessDoors.ca](http://www.BestAccessDoors.ca)  
E-MAIL:  
[info@bestaccessdoors.ca](mailto:info@bestaccessdoors.ca)