

Quality Access Doors- FAST!

SPECIFICATIONS

- 01. Heavy duty forged stainless steel hinges with stainless steel pins
- 02. Guide arm (If required)
- 1-1/2" Drain coupling 03.
- 04. Standard slam lock 05. Automatic hold open arm with Red vinyl
- grip 06. 1/4" Steel diamond pattern plate cover
- 07. 1/4" Steel channel frame with welded 1 1/4" x 1 1/4" anchor flange
- 07. Spring lifting mechanism

SHOP FINISH:

STEEL: Red oxide primer HARDWARE: Non-corrosive materials (Unless otherwise specified)

Reinforced for H20 loading

INSTALLER NOTES:

A. Use caution. Cover is spring loaded. Do not remove safety shipping bolt until unit is to be installed and in normal horizontal operating position.

B. Be sure unit is set on slight pitch toward drain corner.

C. Before anchoring in place open and close door. Check to see that the door in the closed position rests on the frame all around. If not, shim under the frame at the proper corner.

D. Do not reduce 1 1/2" drain pipe to dry well or disposal system.


For a complete list of options visit www.BestAccessDoors.ca

QTY	TYPE	SIZE WIDTH X LENGTH	SHELF DEPTH
	J-1H20	2'-0" X 2'-0" [610mm] X [610mm]	4 1/2" [114mm]
	J-2H20	2'-6" X 2'-6" [762mm] X [762mm]	4 1/2" [114mm]
	J-3H20	3'-0" X 2'-6" [914mm] X [762mm]	4 1/2" [114mm]
	J-4H20	3'-0" X 3'-0" [914mm] X [914mm]	5 1/2" [140mm]
	J-5H20	3'-6" X 3'-6" [1065mm] X [1065mm]	5 1/2" [140mm]



To view Pricing and Additional Product Info.

SUBMITTAL/TECHNICAL DATA SHEET

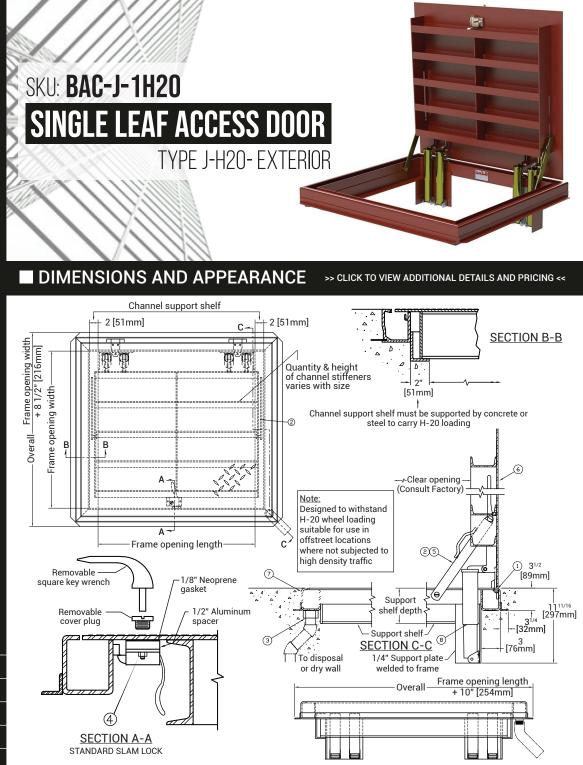

PROJECT DATA

PROJECT NAME :	QTY	w	Н	OPTIONS
ARCHITECT :				
DEALER :				
CONTRACTOR :				
OCATION :	SPECIAL INSTRUCTIONS :			
DATE :				
AGGING INSTRUCTIONS :	SUBMITTAL APPROVAL : (signature or stamp)			





385 WILSON STREET EAST, SUITE 302 ANCASTER, ON, L9G 2C1 CANADA

WEBSITE: www.BestAccessDoors.ca



Custom Sizes Available - Fast!