

DESCRIPTIONS

Constructed of heavier gauge materials for high security applications such as prisons, banks, embassies, and pharmaceutical buildings. Roof hatches can be fabricated for field installation of many leading brands of security locks. Other options include security glazing and gun ports.

SPECIFICATIONS

MATERIAL:

Steel: Cover and frame are 3/16" (4.76mm) steel Aluminum: Cover and frame are 3/16"

(4.76mm) aluminum

COVER:

Brakeformed, hollow-metal design with 1" (25.4mm) concealed fiberglass insulation, 3" (76mm) beaded, overlapping flange, fully welded at corners, and internally reinforced for 40 psf (195 kg/m²) live load

CURB:

12" (305mm) in height with integral capflashing, 1 "(25.4mm) fiberboard insulation, fully welded at corners, and 3-1/2" (89mm) mounting flange with 7 /16" holes (11 mm) provided for securing frame to the roof deck

GASKET:

Extruded EPDM rubber gasket permanently adhered to the cover

HINGES:

Heavy-duty aluminum bronze hinges

LATCH:

Factory prepared to receive a deadbolt detention lock (specify manufacturer and model #), supplied and installed by others in the field. Consult factory if an alternate lock is required.

LIFT ASSISTANCE:

Compression spring operators enclosed in telescopic tubes. Automatic hold-open arm with grip handle release.

FINISH:

Steel: Alkyd base red oxide primer Aluminum: Mill finish

For a complete list of options visit www.BestAccessDoors.ca



To view Pricing and Additional Product Info.

SUBMITTAL/TECHNICAL DATA SHEET

SKU: BAC-NB-50C Security Roof Access Hatch




DIMENSIONS AND APPEARANCE

>> CLICK TO VIEW ADDITIONAL DETAILS AND PRICING <<

STANDARD SIZES AND WEIGHTS

SIZE		STEEL				ALUMINUM				
Weight	< Length	Model #	Weight		Open	Model #	Weight		Open	
inches	mm	would #	lbs.	kg.	Angle	Wodel #	lbs.	kg.	Angle	
36 X 30	914 X 762	S-20C	386	175	70°	S-50C	150	68	70°	
30 X 36	914 X 914	E-20C	400	181	70°	E-50C	176	80	70°	
30 X 54	762 X 1372	NB-20C	475	215	90°	NB-50C	210	95	90°	

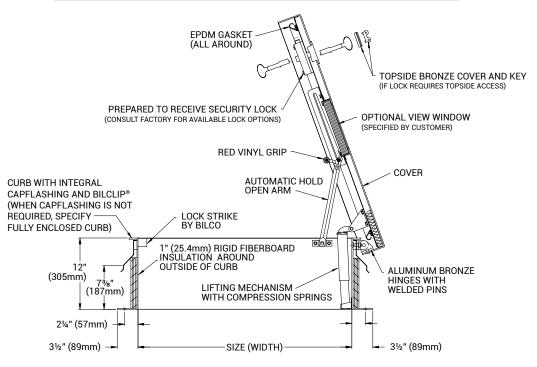

PROJECT DATA

	Custom Sizes	s Available - Fast!	
--	--------------	---------------------	--

PROJECT NAME :	QTY	w	н	OPTIONS		
ARCHITECT :						
DEALER :						
CONTRACTOR :						
LOCATION :		SPECIAL INSTRUCTIONS :				
DATE :						
TAGGING INSTRUCTIONS :	SUBMITTAL APPROVAL : (signature or stamp)					





385 WILSON STREET EAST, SUITE 302 ANCASTER, ON, L9G 2C1 CANADA

WEBSI

WEBSITE: www.BestAccessDoors.ca

